




# 5 mm Tunable Inductor - 164, 165 Series

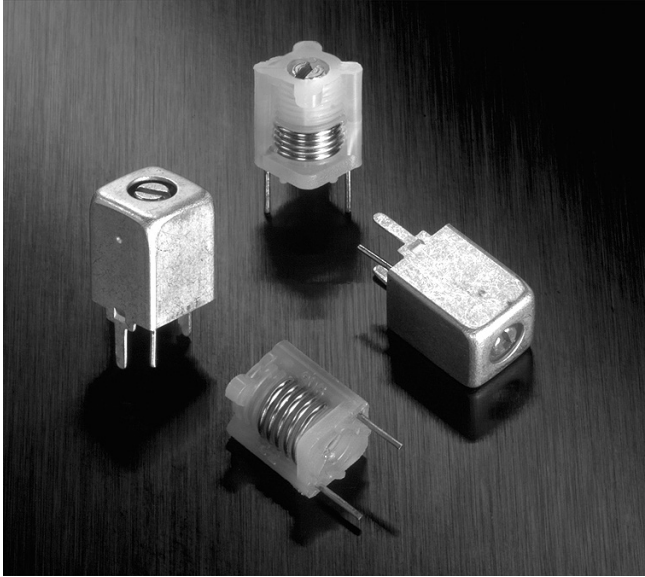

- These tunables offer the compactness of a 5 mm coil and the low drift reliability of an insert molded coil.
- Inductance values from 9 to over 280 nH
- Optional plated brass cans provide integral shielding.
- Can be ordered without cores for use as fixed inductors.

**Designer's Kit M305** contains 2 each of all parts

**Core material** Aluminum, 0.187" (4.75 mm) long.

**Terminations** Leads: RoHS compliant tin-silver over copper. Other terminations available at additional cost. Shield can tabs: Tin-silver over nickel over brass

#### Weight

164 series unshielded: 0.16 – 0.31 g; with shield can: 0.45 – 0.60 g  
165 series unshielded: 0.15 – 0.25 g; with shield can: 0.43 – 0.54 g

**Ambient temperature** –40°C to +85°C

**Storage temperature** Component: –40°C to +85°C.

Packaging tubes: –40°C to +80°C

**Resistance to soldering heat:** Wave solder only. Recommended maximum board surface temperature of 168°C (334°F) for no more than three seconds. Pre-heating is recommended to minimize time over the solder nozzle.

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

#### Failures in Time (FIT) / Mean Time Between Failures (MTBF)


Two per billion hours / 1/2 billion hours, calculated per Telcordia SR-332

**Packaging** 50 parts per tube

**PCB washing** Tested with pure water or alcohol only. For other solvents, see Doc787\_PCB\_Washing.pdf.

**TRITUNER** 3 TOOLS IN 1  
SEE INDEX  
**TUNING WRENCH**

## Unshielded Styles

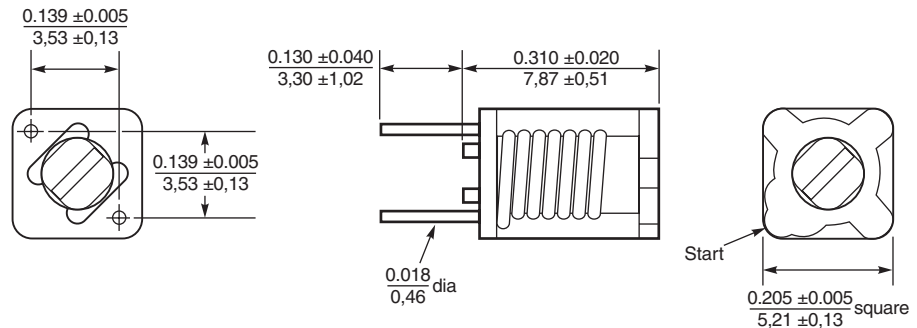

## Shielded Styles



**Coilcraft**  
www.coilcraft.com

**US** +1-847-639-6400 sales@coilcraft.com  
**UK** +44-1236-730595 sales@coilcraft-europe.com  
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw  
**China** +86-21-6218 8074 sales@coilcraft.com.cn  
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 110-1 Revised 08/31/09

© Coilcraft Inc. 2013

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.



# 5 mm Tunable Inductor–Unshielded

| Part number <sup>1</sup> | Color  | Turns | No core             |                    | at L max <sup>3</sup> |                    | at L min <sup>4</sup> |                    | Freq (MHz) | No core SRF min (MHz) | Irms <sup>6</sup> (A) |
|--------------------------|--------|-------|---------------------|--------------------|-----------------------|--------------------|-----------------------|--------------------|------------|-----------------------|-----------------------|
|                          |        |       | L (nH) <sup>2</sup> | Q min <sup>5</sup> | L (nH) <sup>2</sup>   | Q min <sup>5</sup> | L (nH) <sup>2</sup>   | Q min <sup>5</sup> |            |                       |                       |
| 164-01A06L               | Brown  | 1½    | 19                  | 145                | 19                    | 145                | 16                    | 112                | 150        | 2000                  | 7.2                   |
| 164-02A06L               | Red    | 2½    | 34                  | 138                | 34                    | 138                | 26                    | 96                 | 150        | 1260                  | 5.1                   |
| 164-03A06L               | Orange | 3½    | 55                  | 130                | 55                    | 130                | 38                    | 79                 | 150        | 960                   | 4.4                   |
| 164-04A06L               | Yellow | 4½    | 77                  | 119                | 77                    | 119                | 52                    | 72                 | 150        | 850                   | 3.7                   |
| 164-05A06L               | Green  | 5½    | 101                 | 108                | 99                    | 86                 | 65                    | 64                 | 150        | 770                   | 3.6                   |
| 164-06A06L               | Blue   | 6½    | 128                 | 107                | 126                   | 75                 | 83                    | 60                 | 100        | 730                   | 3.3                   |
| 164-07A06L               | Violet | 7½    | 156                 | 106                | 150                   | 68                 | 97                    | 57                 | 100        | 640                   | 3.1                   |
| 164-08A06L               | Gray   | 8½    | 183                 | 100                | 178                   | 62                 | 112                   | 53                 | 100        | 570                   | 2.9                   |
| 164-09A06L               | White  | 9½    | 216                 | 100                | 190                   | 62                 | 131                   | 53                 | 100        | 540                   | 2.7                   |
| 164-10A06L               | Black  | 10½   | 248                 | 92                 | 223                   | 55                 | 148                   | 51                 | 100        | 490                   | 2.5                   |
| 164-11A06L               | Brown  | 11½   | 281                 | 92                 | 246                   | 55                 | 170                   | 51                 | 100        | 360                   | 2.3                   |
| 165-00A06L               | Black  | ½     | 9                   | 147                | 9                     | 147                | 9                     | 131                | 150        | 6000                  | 8.1                   |
| 165-01A06L               | Brown  | 1½    | 18                  | 145                | 18                    | 145                | 15                    | 112                | 150        | 2850                  | 6.5                   |
| 165-02A06L               | Red    | 2½    | 32                  | 143                | 32                    | 143                | 25                    | 92                 | 150        | 1860                  | 4.9                   |
| 165-03A06L               | Orange | 3½    | 48                  | 138                | 45                    | 135                | 33                    | 84                 | 150        | 1410                  | 4.2                   |
| 165-04A06L               | Yellow | 4½    | 64                  | 133                | 60                    | 114                | 43                    | 76                 | 150        | 1130                  | 3.8                   |
| 165-05A06L               | Green  | 5½    | 83                  | 125                | 78                    | 110                | 54                    | 73                 | 150        | 820                   | 3.6                   |
| 165-06A06L               | Blue   | 6½    | 103                 | 120                | 90                    | 94                 | 68                    | 70                 | 150        | 800                   | 3.4                   |
| 165-07A06L               | Violet | 7½    | 122                 | 115                | 105                   | 92                 | 79                    | 69                 | 150        | 770                   | 3.1                   |

## Notes:


- To order fixed inductance parts without cores, eliminate the "A06", e.g. 164-01.
- Inductance measured on Agilent/HP 4286A Impedance Analyzer with 16092A Spring Clip Fixture.
- L max measured with core halfway out top of form.
- L min measured with core centered in winding.
- Q measured on Agilent/HP 4286A with 16092A fixture, direct connect to Agilent/HP 4342A Q-Meter and Meguro MQ-171 Q-Meter with 0.5" bus bars.
- Current that causes a 15°C rise above 25°C ambient.
- Electrical specifications 25°C.

## Typical Q vs Frequency

### 164 Series No Core




### 164 Series Al Core

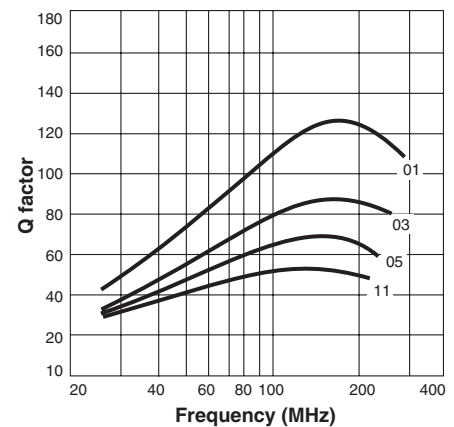

### 165 Series No Core



### 165 Series Al Core

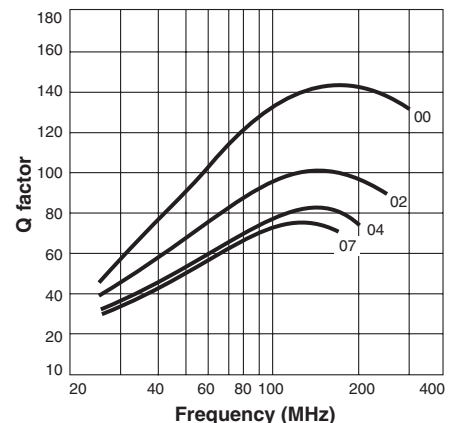

**COILCRAFT** ACCURATE  
PRECISION REPEATABLE  
MEASUREMENTS  
SEE WEB SITE TEST FIXTURES

**Coilcraft**

www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com  
UK +44-1236-730595 sales@coilcraft-europe.com  
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw  
China +86-21-6218 8074 sales@coilcraft.com.cn  
Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 110-2 Revised 08/31/09

© Coilcraft Inc. 2013

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.



# 5 mm Tunable Inductor–Shielded

**TRITUNER** 3 TOOLS IN 1  
SEE INDEX  
**TUNING WRENCH**

| Part number <sup>1</sup> | Color  | Turns  | No core             |                    | at L max <sup>3</sup> |                    | at L min <sup>4</sup> |                    | Freq (MHz) | No core SRF min (MHz) | Irms <sup>6</sup> (A) |
|--------------------------|--------|--------|---------------------|--------------------|-----------------------|--------------------|-----------------------|--------------------|------------|-----------------------|-----------------------|
|                          |        |        | L (nH) <sup>2</sup> | Q min <sup>5</sup> | L (nH) <sup>2</sup>   | Q min <sup>5</sup> | L (nH) <sup>2</sup>   | Q min <sup>5</sup> |            |                       |                       |
| 164-01A06SL              | Brown  | 1 1/2  | 16                  | 124                | 16                    | 124                | 14                    | 106                | 150        | 2100                  | 7.2                   |
| 164-02A06SL              | Red    | 2 1/2  | 27                  | 108                | 27                    | 108                | 22                    | 89                 | 150        | 1300                  | 5.1                   |
| 164-03A06SL              | Orange | 3 1/2  | 41                  | 92                 | 41                    | 92                 | 32                    | 72                 | 150        | 1100                  | 4.4                   |
| 164-04A06SL              | Yellow | 4 1/2  | 56                  | 86                 | 56                    | 84                 | 43                    | 66                 | 150        | 940                   | 3.7                   |
| 164-05A06SL              | Green  | 5 1/2  | 71                  | 80                 | 71                    | 79                 | 53                    | 60                 | 150        | 980                   | 3.6                   |
| 164-06A06SL              | Blue   | 6 1/2  | 88                  | 79                 | 80                    | 77                 | 65                    | 59                 | 150        | 800                   | 3.3                   |
| 164-07A06SL              | Violet | 7 1/2  | 105                 | 75                 | 101                   | 70                 | 76                    | 54                 | 100        | 750                   | 3.1                   |
| 164-08A06SL              | Gray   | 8 1/2  | 122                 | 74                 | 117                   | 64                 | 87                    | 54                 | 100        | 580                   | 2.9                   |
| 164-09A06SL              | White  | 9 1/2  | 141                 | 71                 | 134                   | 62                 | 100                   | 53                 | 100        | 550                   | 2.7                   |
| 164-10A06SL              | Black  | 10 1/2 | 160                 | 69                 | 150                   | 60                 | 113                   | 51                 | 100        | 490                   | 2.5                   |
| 164-11A06SL              | Brown  | 11 1/2 | 179                 | 69                 | 164                   | 60                 | 127                   | 51                 | 100        | 400                   | 2.3                   |
| 165-00A06SL              | Black  | 1/2    | 9                   | 138                | 9                     | 138                | 9                     | 121                | 150        | 6000                  | 8.1                   |
| 165-01A06SL              | Brown  | 1 1/2  | 16                  | 124                | 16                    | 124                | 14                    | 104                | 150        | 2570                  | 6.5                   |
| 165-02A06SL              | Red    | 2 1/2  | 25                  | 110                | 25                    | 110                | 21                    | 87                 | 150        | 1670                  | 4.9                   |
| 165-03A06SL              | Orange | 3 1/2  | 35                  | 104                | 33                    | 102                | 28                    | 78                 | 150        | 1230                  | 4.2                   |
| 165-04A06SL              | Yellow | 4 1/2  | 46                  | 97                 | 41                    | 90                 | 35                    | 69                 | 150        | 1150                  | 3.8                   |
| 165-05A06SL              | Green  | 5 1/2  | 57                  | 92                 | 50                    | 82                 | 43                    | 67                 | 150        | 820                   | 3.6                   |
| 165-06A06SL              | Blue   | 6 1/2  | 68                  | 86                 | 59                    | 75                 | 52                    | 65                 | 150        | 800                   | 3.4                   |
| 165-07A06SL              | Violet | 7 1/2  | 80                  | 85                 | 70                    | 74                 | 60                    | 64                 | 150        | 770                   | 3.1                   |

**Notes:**

- To order fixed inductance parts without cores, eliminate the "A06", e.g. 164-01S.
- Inductance measured on Agilent/HP 4286A Impedance Analyzer with 16092A Spring Clip Fixture.
- L max measured with core halfway out top of form.
- L min measured with core centered in winding.
- Q measured on Agilent/HP 4286A with 16092A fixture, direct connect to Agilent/HP 4342A Q-Meter and Meguro MQ-171 Q-Meter with 0.5" bus bars.
- Current that causes a 15°C rise above 25°C ambient.
- Electrical specifications 25°C.

## Typical Q vs Frequency

164 Series No Core



164 Series Al Core



165 Series No Core



165 Series Al Core



**COILCRAFT** ACCURATE REPEATABLE PRECISION MEASUREMENTS TEST FIXTURES  
SEE WEB SITE



**US** +1-847-639-6400 sales@coilcraft.com  
**UK** +44-1236-730595 sales@coilcraft-europe.com  
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw  
**China** +86-21-6218 8074 sales@coilcraft.com.cn  
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 110-3 Revised 08/31/09

© Coilcraft Inc. 2013  
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.