
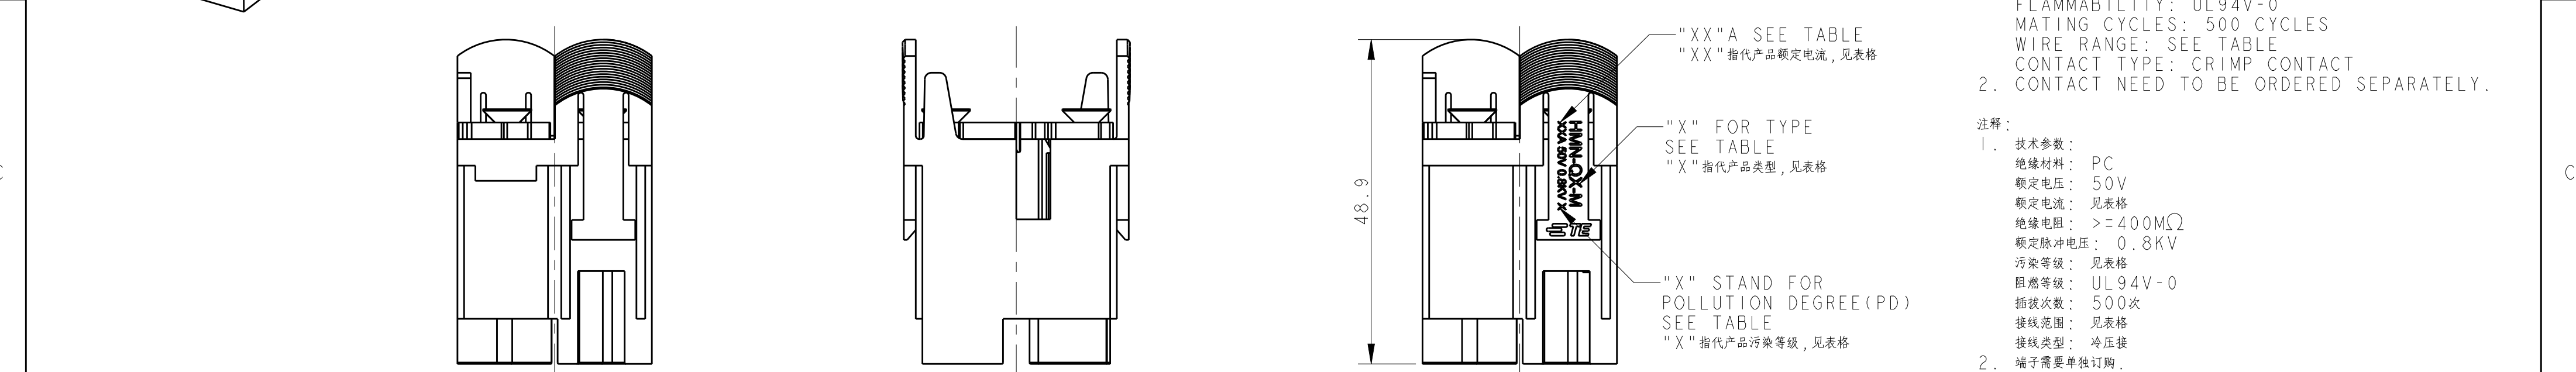


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	INITIAL	19SEP2017	YC	CW

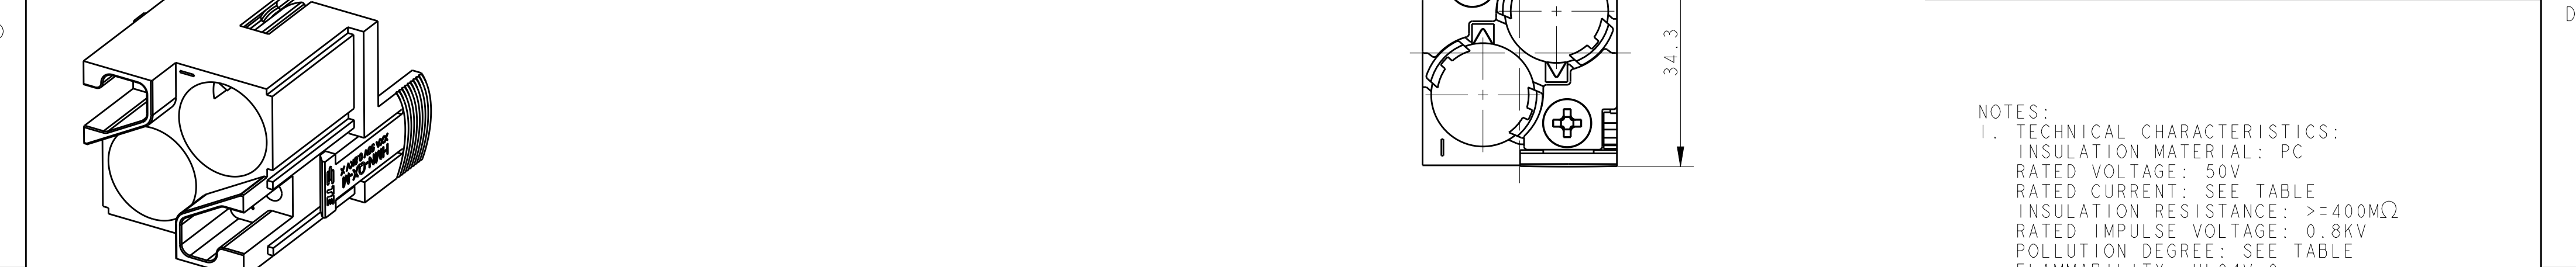

NOTES:

1. TECHNICAL CHARACTERISTICS:

INSULATION MATERIAL: PC

RATED VOLTAGE: 50V

RATED CURRENT: SEE TABLE

INSULATION RESISTANCE: $\geq 400M\Omega$

RATED IMPULSE VOLTAGE: 0.8KV

POLLUTION DEGREE: SEE TABLE

FLAMMABILITY: UL94V-0

MATING CYCLES: 500 CYCLES

WIRE RANGE: SEE TABLE

CONTACT TYPE: CRIMP CONTACT

2. CONTACT NEED TO BE ORDERED SEPARATELY.

注释:

1. 技术参数:

绝缘材料: PC

额定电压: 50V

额定电流: 见表格

绝缘电阻: $\geq 400M\Omega$

额定脉冲电压: 0.8KV

污染等级: 见表格

阻燃等级: UL94V-0

插拔次数: 500次

接线范围: 见表格

接线类型: 冷压接

2. 端子需要单独订购.

T2111027101-702	HMN-Q3-M	HMN-Q3 MALE MODULE INSERT 5A HMN-Q3 模块公插5A	5A	2	0.08~0.52 mm ² (28~20 AWG)
T2111027101-701	HMN-Q2-M	HMN-Q2 MALE MODULE INSERT 10A HMN-Q2 模块公插10A	10A	3	0.14~2.5 mm ² (26~14 AWG)
T2111027101-007	HMN-Q1-M	HMN-Q1 MALE MODULE INSERT 16A HMN-Q1 模块公插16A	16A	3	0.14~4 mm ² (26~12 AWG)
PART NUMBER 料号	"X" TYPE "X" 产品型号		"XX"A "XX"电流	"X" PD "X"污染等级	WIRE GAUGE 线规

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN YORK CHEN 19SEP2017	 TE Connectivity		
DIMENSIONS:		CHK GINO YAO 19SEP2017			
mm		APVD CHRIS WANG 19SEP2017	NAME HMN-Q1/Q2/Q3-M		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	SIZE A200779		
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		APPLICATION SPEC			
MATERIAL		WEIGHT	DRAWING NO C-T2111027101007		
-		-	RESTRICTED TO -		
-		-	SCALE 3:2		
CUSTOMER DRAWING		SHEET 1		OF 1	REV B