


D

C

B

A

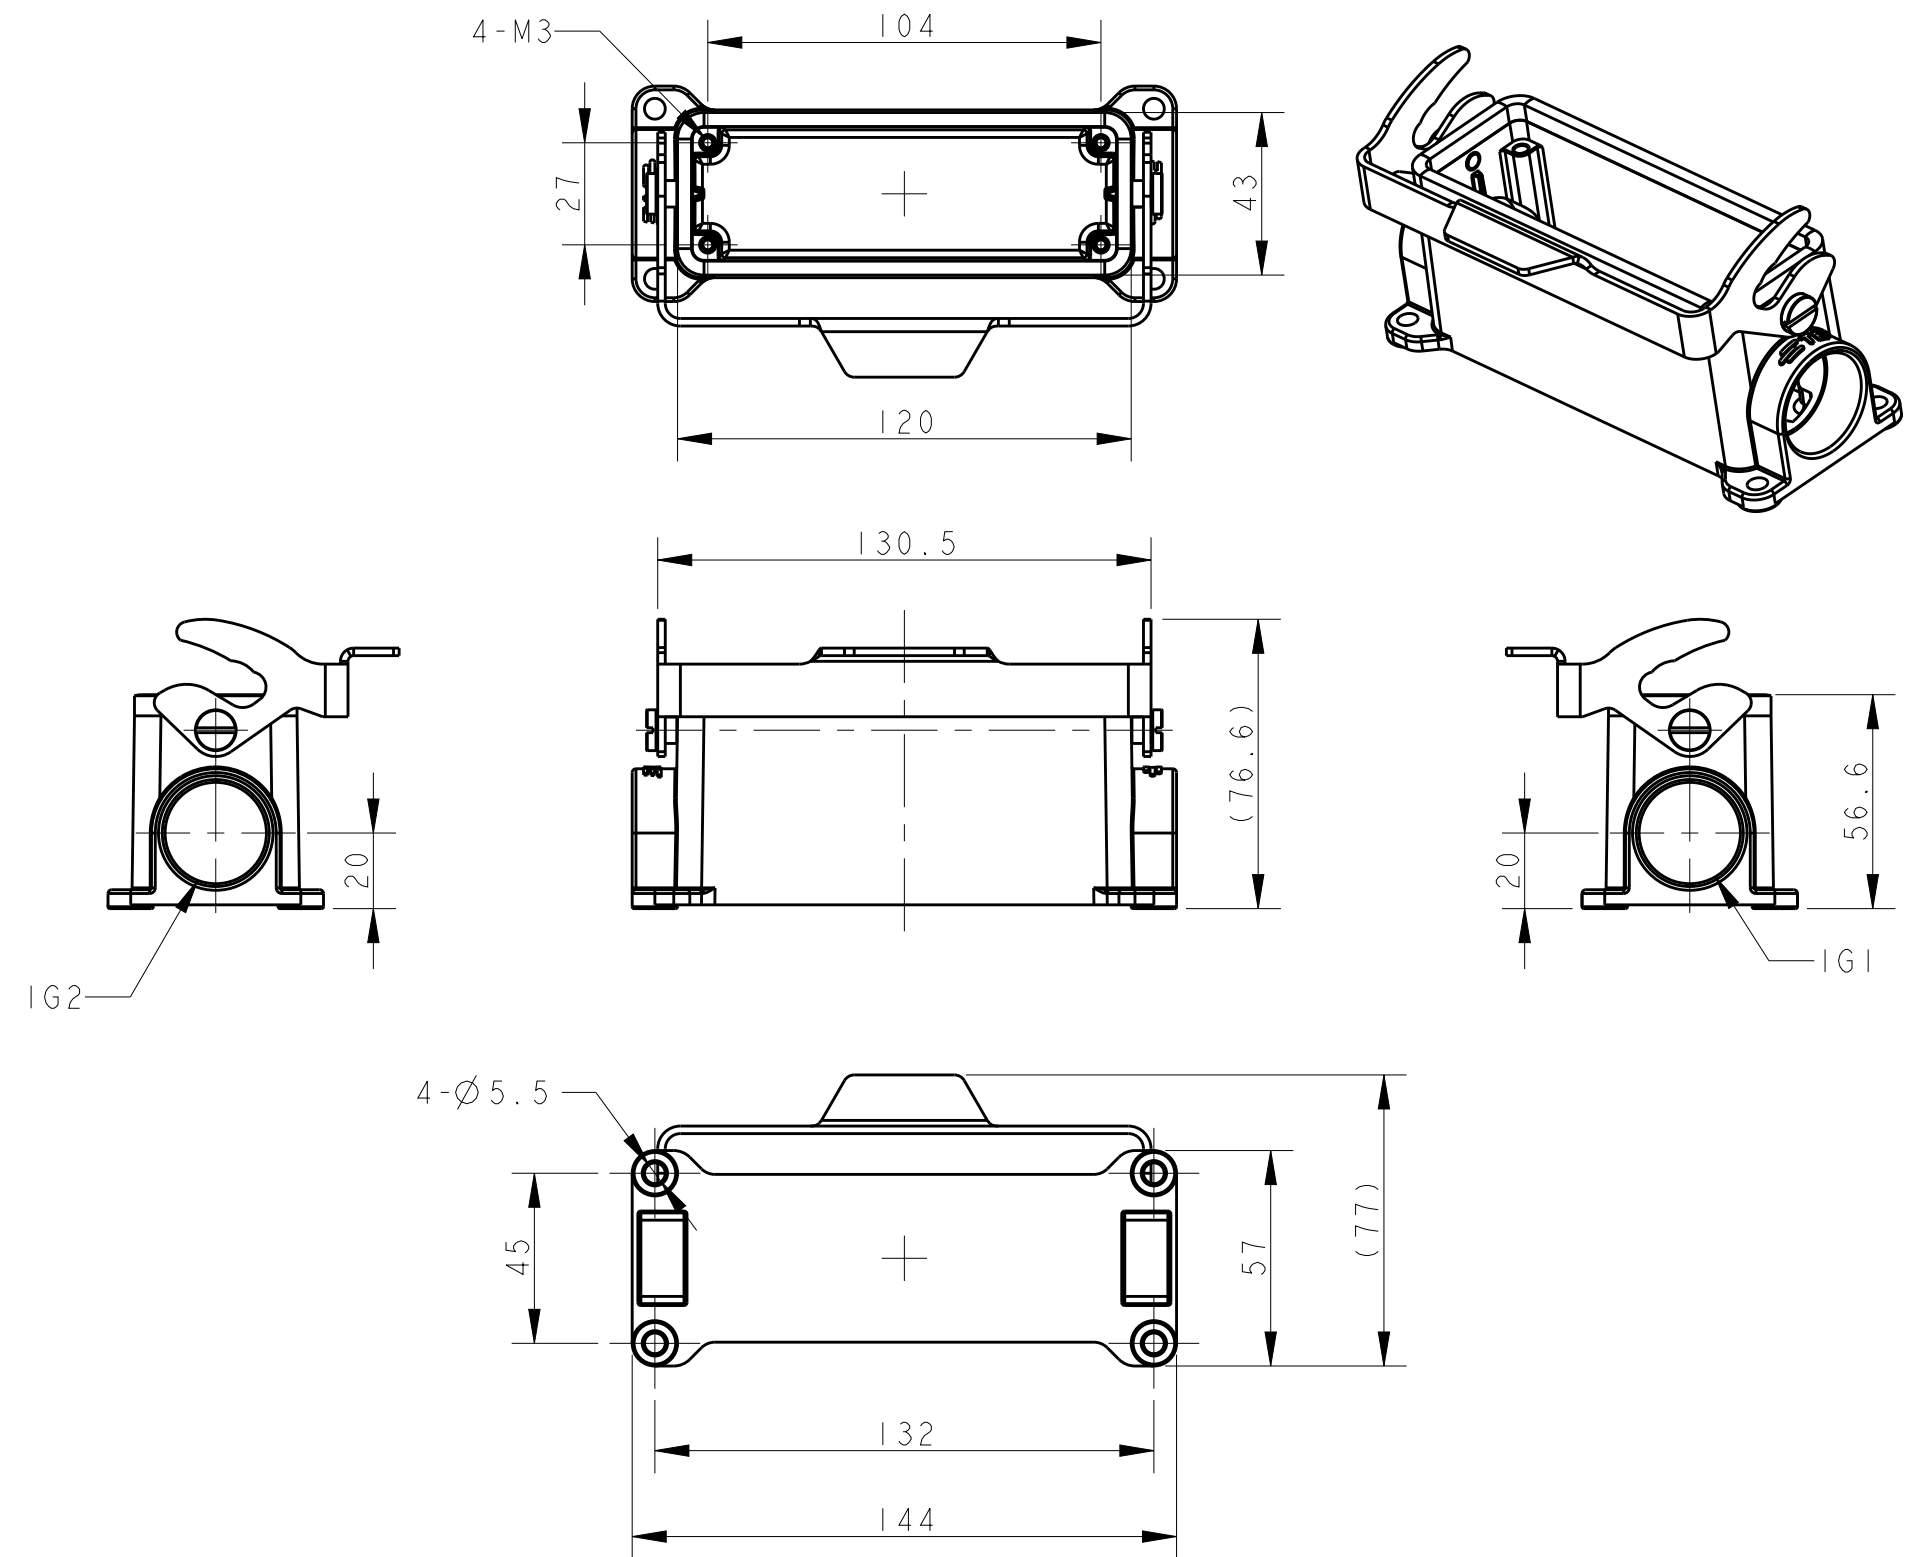


TYPE 1: BODY + SINGLE STEEL LOCKING


NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

TI610243121-000	TYPE 1	H24B-SGR-LB-PG21	PG21	-
TI610243125-000		H24B-SGR-LB-M25	M25	-
TI610243221-000		H24B-SGR-LB-2PG21	PG21	PG21
TI610243225-000		H24B-SGR-LB-2M25	M25	M25
TI620243121-000	TYPE 2	H24B-SDR-LB-PG21	PG21	-
TI620243125-000		H24B-SDR-LB-M25	M25	-
TI620243221-000		H24B-SDR-LB-2PG21	PG21	PG21
TI620243225-000		H24B-SDR-LB-2M25	M25	M25
TI620243421-000	TYPE 3	H24B-SDRM-LB-PG21	PG21	-
TI620243425-000		H24B-SDRM-LB-M25	M25	-
TI620243321-000		H24B-SDRM-LB-2PG21	PG21	PG21
TI620243325-000		H24B-SDRM-LB-2M25	M25	M25
ASSEMBLY PART NUMBER	TYPE	ASSEMBLY PART DESCRIPTION	IG1	IG2

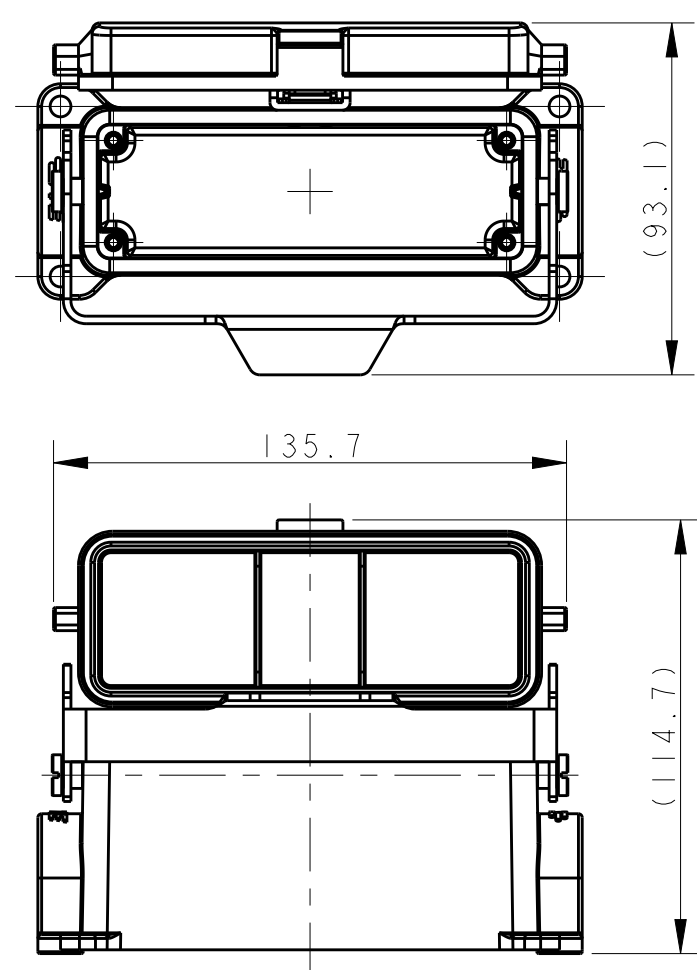

TYPE 2: BODY + SINGLE STEEL LOCKING + PLASTIC PROTECTION COVER
OTHER SPEC REFER TO TYPE 1

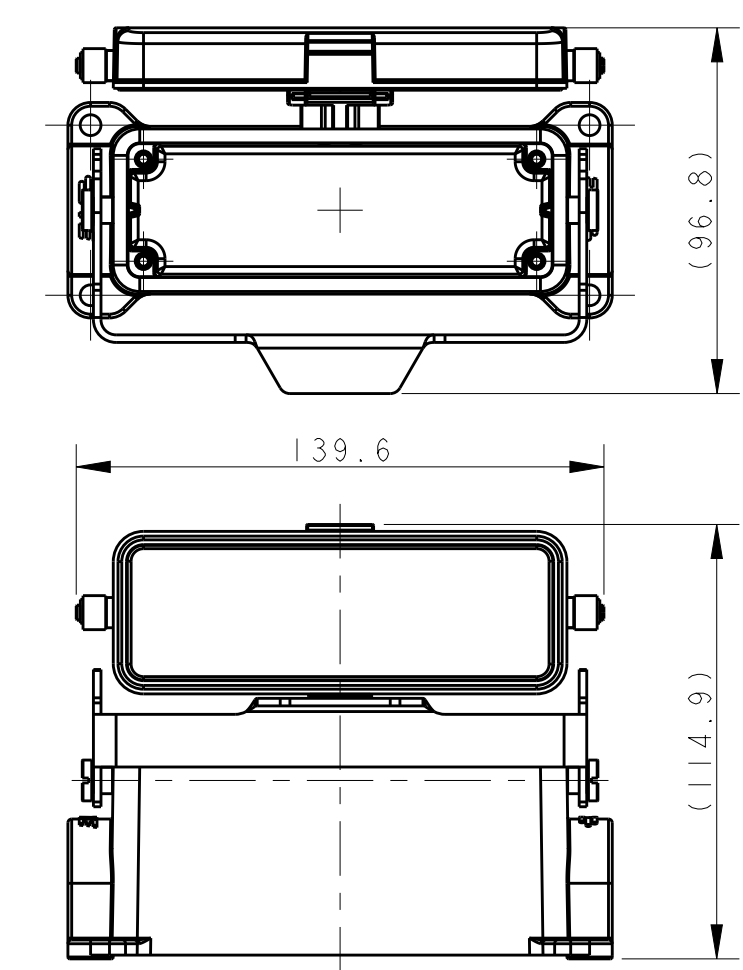

TYPE 3: BODY + SINGLE STEEL LOCKING + METAL PROTECTION COVER
OTHER SPEC REFER TO TYPE 1



D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 02JUL2015	TE Connectivity		
DIMENSIONS: mm		CHK CHRIS WANG 02JUL2015			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD XU XIANG 02JUL2015	NAME H24B-SGR/SDR/SDRM-LB-PG/M		
0 PLC ±-		PRODUCT SPEC 108-137013	SIZE A2 CAGE CODE - DRAWING NO C-TI6X0243XXXX00 RESTRICTED TO -		
1 PLC ±-		APPLICATION SPEC 114-137013			
2 PLC ±-		WEIGHT -	SCALE 1:2 SHEET 1 OF 2 REV A		
3 PLC ±-		Customer Drawing			
4 PLC ±-					
ANGLES ±-					
FINISH -					

