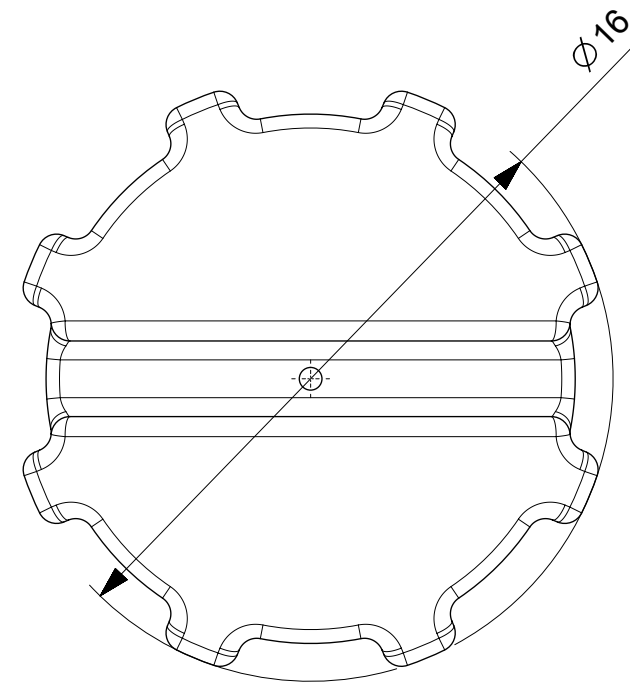
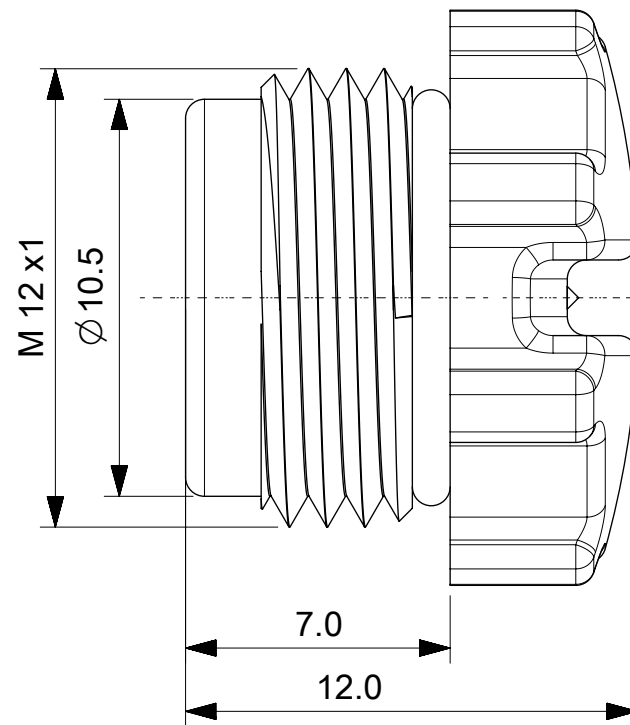
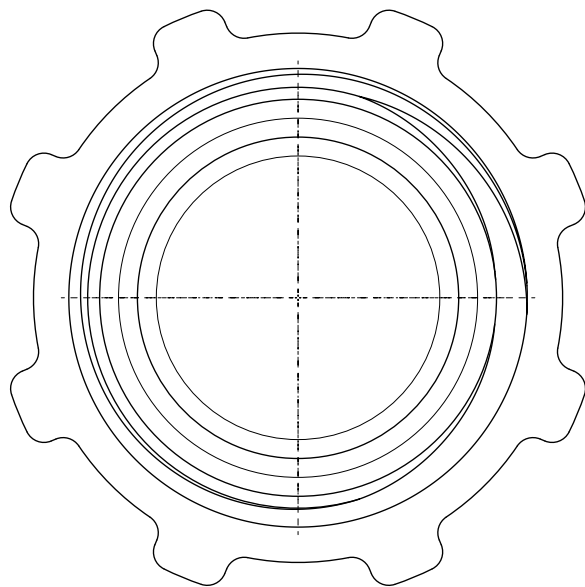



NOTES / Bemerkungen:

- MATERIAL:** PA66-GF25 black, Ultramid A3X2G5 BK
Material: PA66-GF25 schwarz, Ultramid A3X2G5 BK
- FLAMMABILITY:** UL94: V0
Brennbarkeit: UL94: V0
- IP67 RATED ACHIEVED WHEN PROTECTION CAP IS MATED WITH M12 CONNECTOR (ACCORDING IEC 61076-2-101) AND FIXED WITH LOCKED TORQUE: 0,5 Nm.**
Schutzart IP67 wird erreicht wenn die Schutzkappe mit einem M12 Steckverbinder, nach IEC 61076-2-101, montiert und mit einem Drehmoment: 0,5 Nm, angezogen wird.
- TEMPERATURE RANGE:** -40°C +115°C
Temperatur Bereich: -40°C +115°C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
QUALITY SYMBOLS		EC NO: 102635 DRWN: JELIZAINCIN CHK'D: RSILLER APPR: RSILLER	2016/01/25 2016/02/05 2016/02/05	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex®			
	= 0			ANGULAR TOL ± 1.0 °		mm		5:1					
	= 0					DRWN BY		DATE					
	= 0			4 PLACES ±		JELIZAINCIN		2016/01/25		ACC PCAP M12 FE OR 9X1			
	= 0			3 PLACES ±		CHK'D BY		DATE					
	= 0			2 PLACES ± 0.05		APPR BY		DATE		PRODUCT CUSTOMER DRAWING			
	= 0			1 PLACE ± 0.1		RSILLER		2016/02/05					
	= 0			0 PLACES ± 0.2		DRAWING SIZE		THIRD ANGLE PROJECTION		SERIES	MATERIAL NUMBER		CUSTOMER
	= 0			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		A3				120358	1203580007		
				A	REV					DOCUMENT NUMBER		DOC TYPE	DOC PART
								1203580007		PSD	010	1 OF 1	