
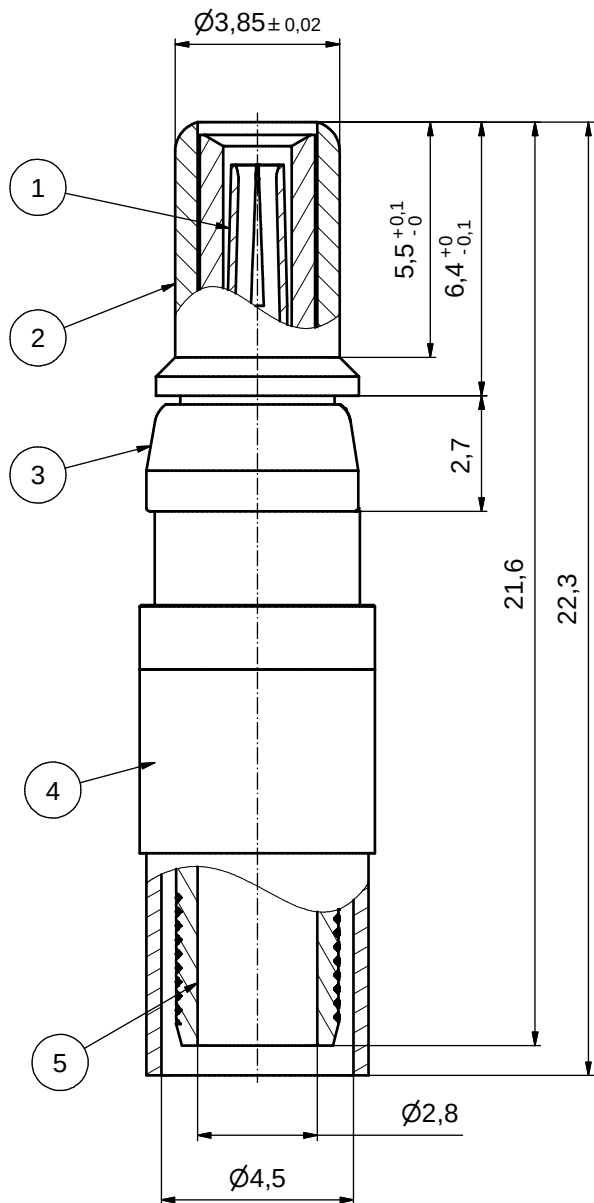


Technical drawing of a stepped cylinder. The drawing shows a side view with a vertical centerline. The object consists of a base cylinder with a cross-hatched section, a middle cylinder, and a top flange. Dimensions are indicated on the right: the total height is 9,5; the height of the middle cylinder is 5; and the height of the top flange is 3.

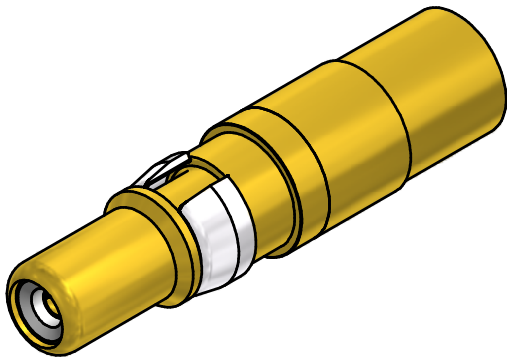

1. CENTER CONTACT: SOLDERED
2. OUTER CONTACT: 360X10519X
USER CRIMP TOOL: 360X11019X
INSERT CAVITY A: HEX 4,52 / .178

Part no.	Finish Pos.1	Finish Pos.2	Finish Pos.3	Finish Pos. 4/5
131J20039X	min. 50µin HARD GOLD over min. 50µin NICKEL	min. 30µin HARD GOLD over min. 50µin NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL
131A20039X	GOLD FLASH over NICKEL	GOLD FLASH over NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.

DO NOT ALTER CAD DRAWING BY HAND

a	Origin		
rev.	description	date	name

tolerance		 dim. in mm
	date	name
drawn	05.10.10	Henneboel
appd.	05.10.10	Koch
norm		
d-old		



scale:		8:1	
material:		see table	
title:			
COAXIAL CONTACT PLUG 50 OHM			
inner + outer conductor for crimp termination for cable 180 B/U			
dwg no:		Inventor 10	DIN- A3
3K2A026A		sh: 1	
part no:		see table	