

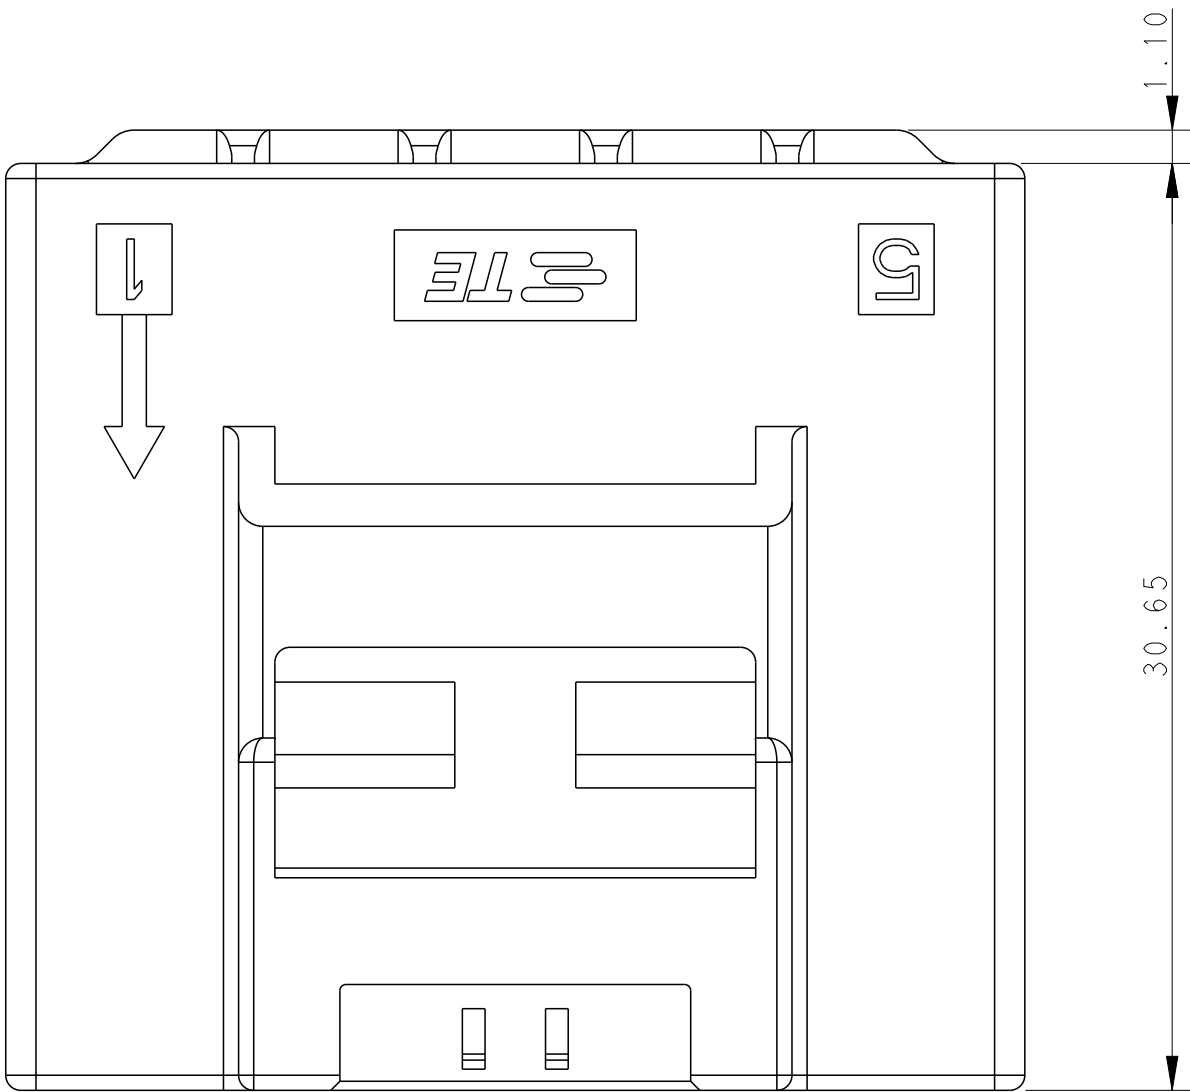
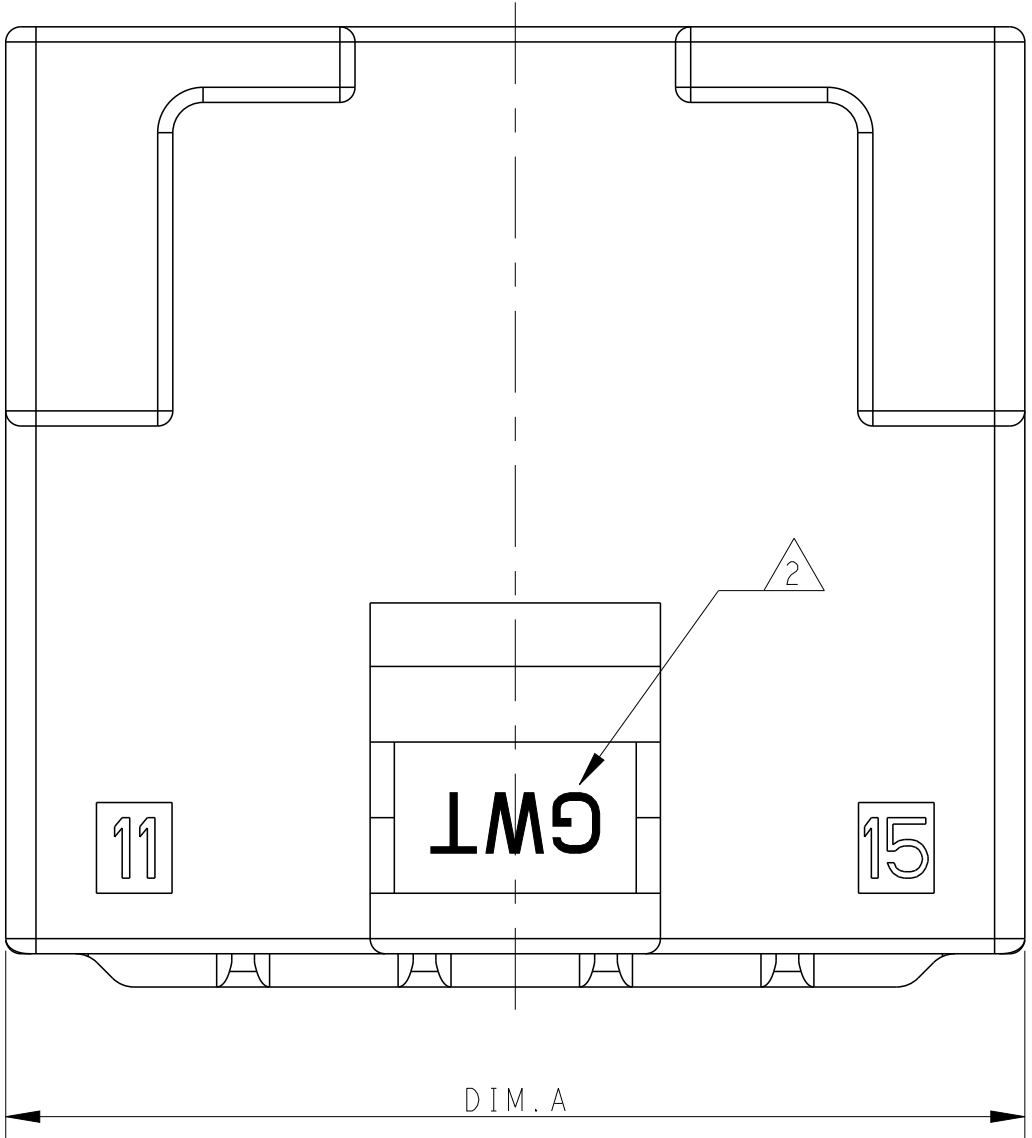
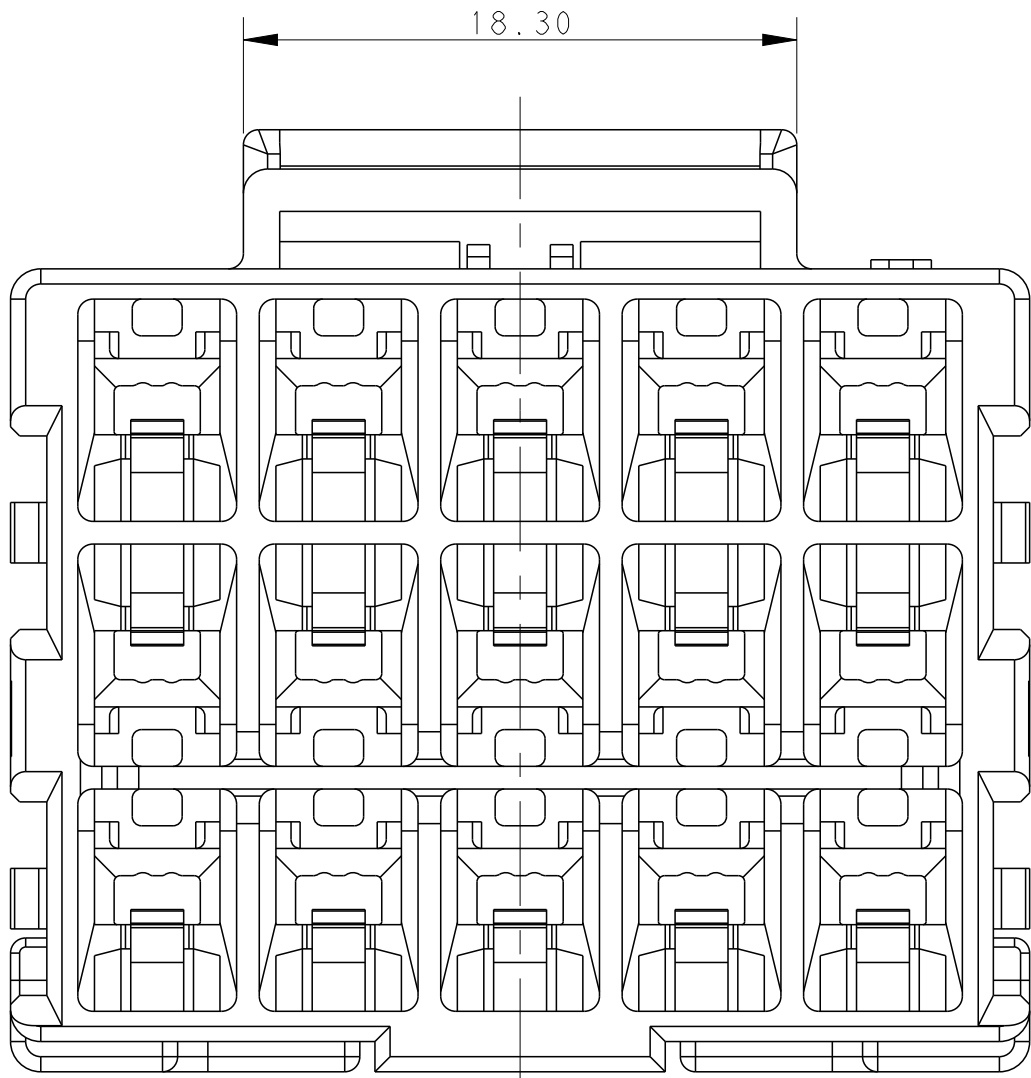


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECR-16-003314	18JUL2016	BW	GJ

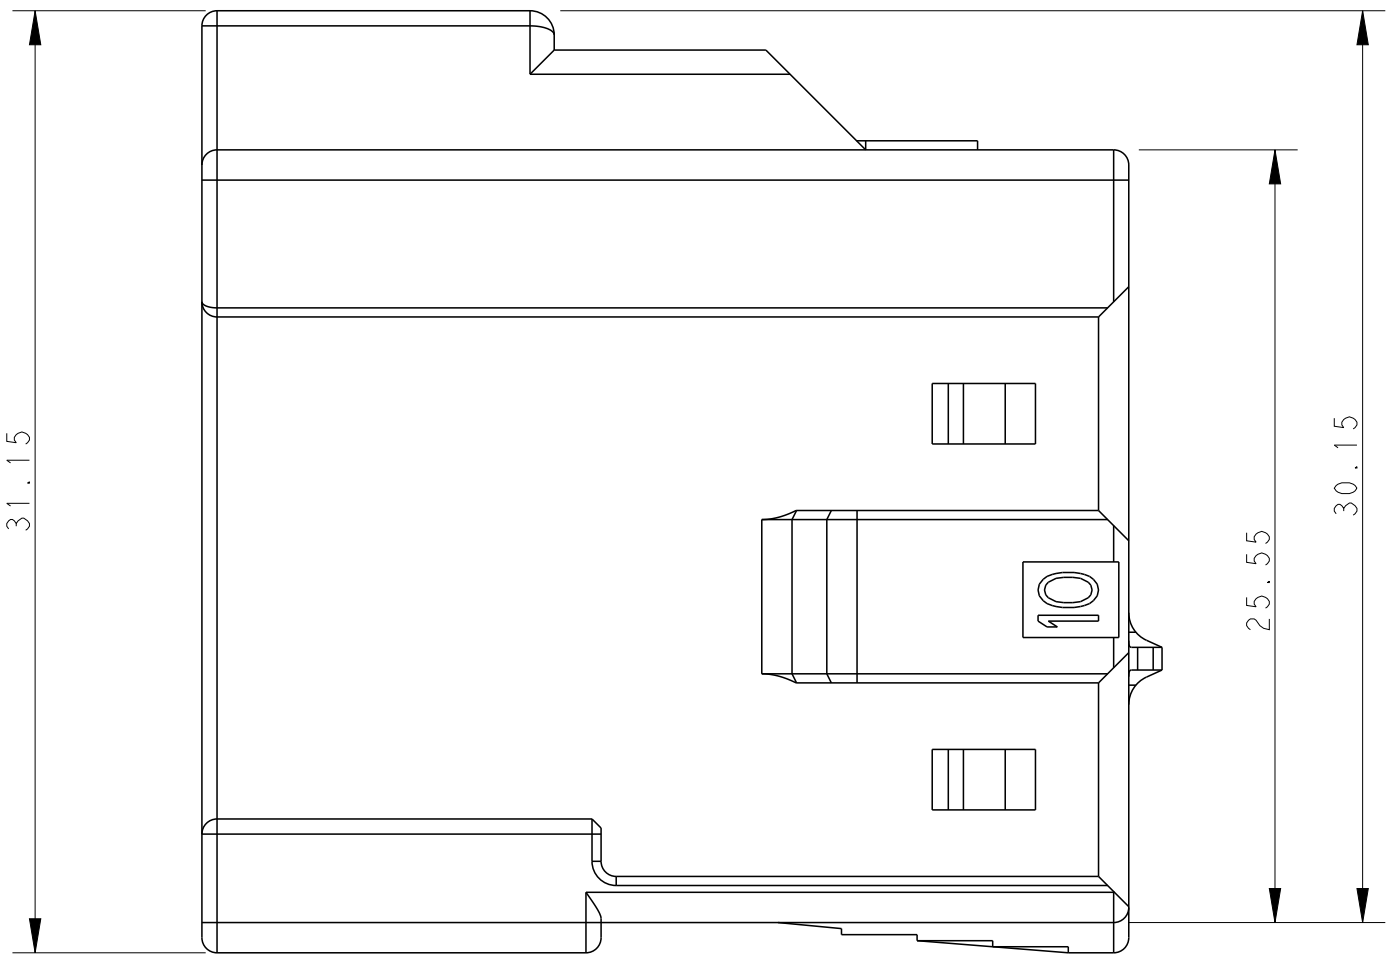

POS.	DIM.A	DIM.B
3*5	33.70	31.30
3*4	27.70	25.30
3*3	21.70	19.30

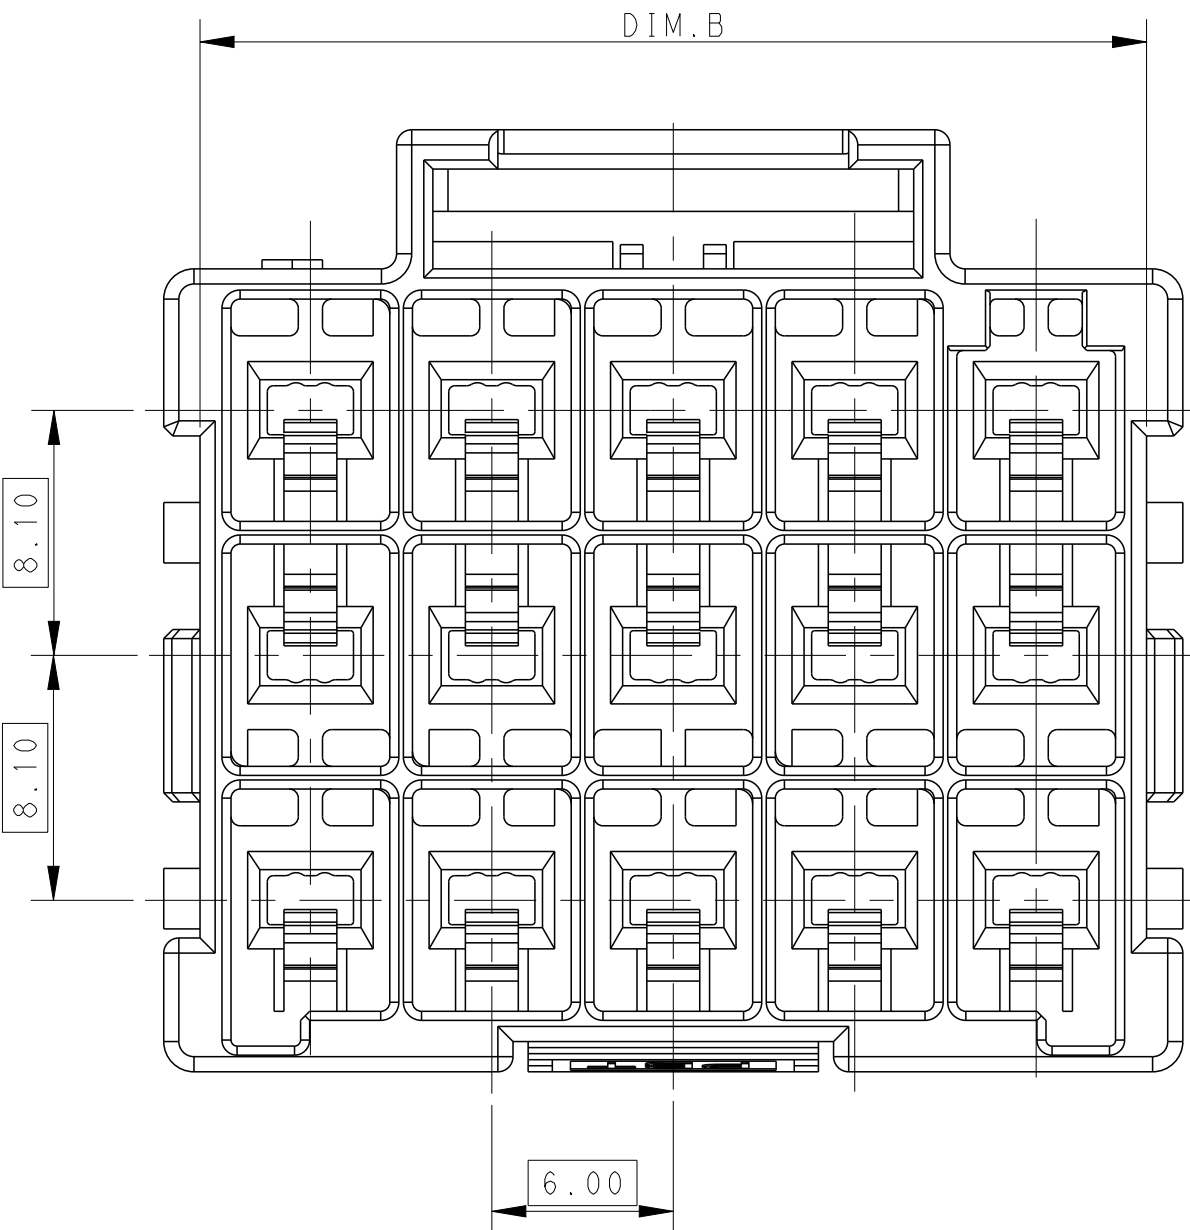

- 1 MATERIAL:
LEVEL A:PA6 GLASS FILLED,COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT),UL 94V-0
LEVEL B:PBT GLASS FILLED,HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0.

- 2 MATERIAL MARK:
LEVEL A: GWT,LEVEL B:HWT.







- 3 APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*

- 4 MATING CONN. P/N
PLUG HSG: *-2232357-
TPA DOUBLE ROW: *-1971778-
TPA SINGLE ROW: *-1971777-*

- 6 THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY_WU 26MAR2013	TE Connectivity	
DIMENSIONS:		CHK HAPYE_WU 26MAR2013		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD YUZHONG_MAO 26MAR2013	NAME CAP HOUSING,FREE HANGING,TRIPLE ROW POWER TRIPLE LOCK	
	0 PLC	±	PRODUCT SPEC	
	1 PLC	±0.35	108-106118	
	2 PLC	±0.25	APPLICATION SPEC	
	3 PLC	±	114-106118	
	4 PLC	±	WEIGHT	
	ANGLES	±	Customer Drawing	
MATERIAL		FINISH	SIZE A100779	
-	-	-	C=2232360	
-	-	-	RESTRICTED TO	
Customer Drawing			SCALE	SHEET 1 OF 2 REV B

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

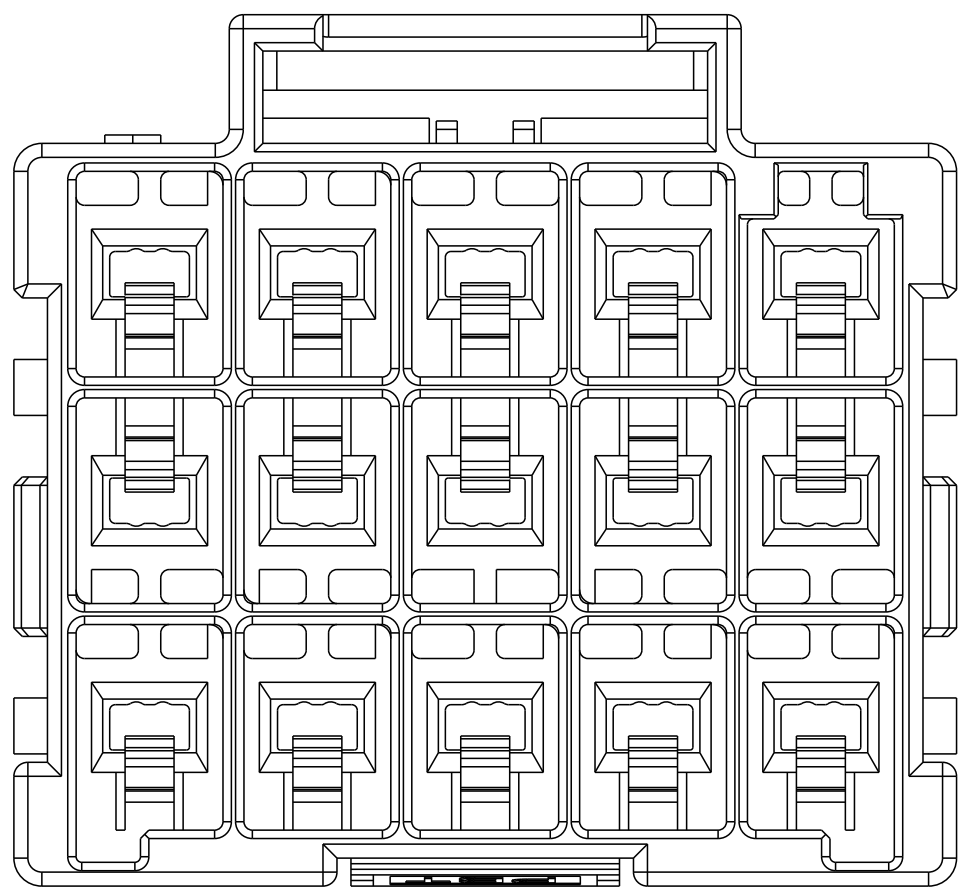
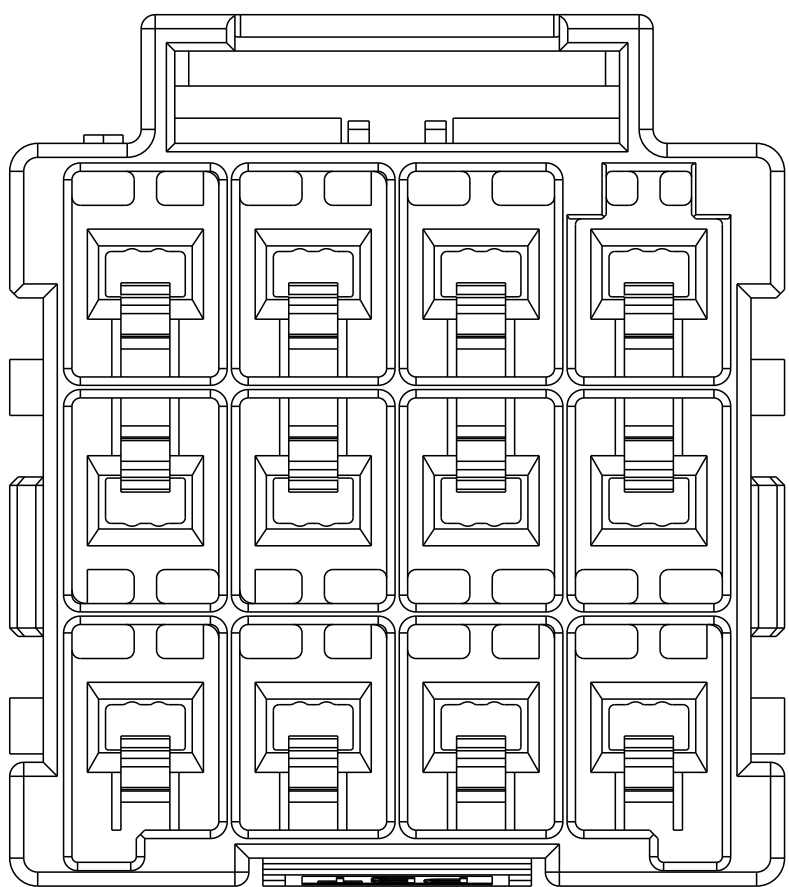
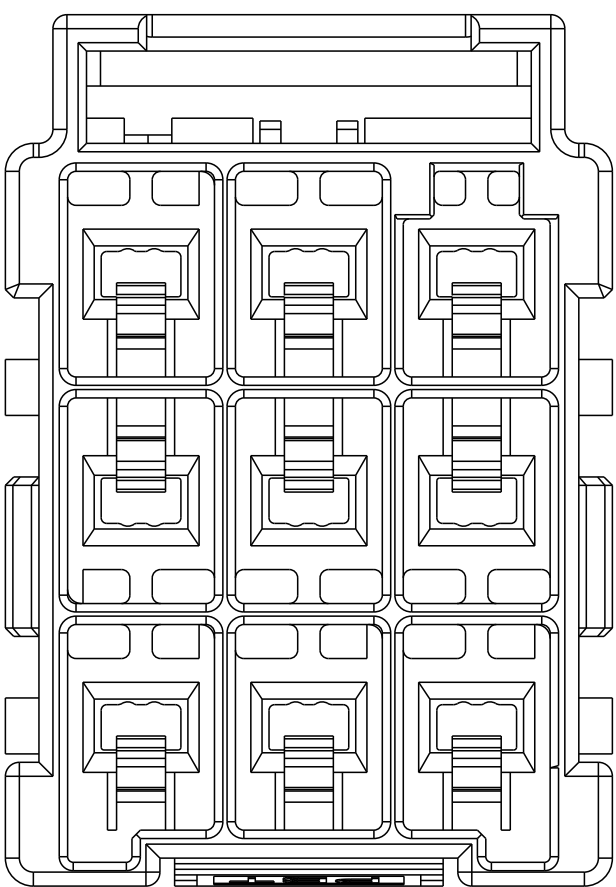
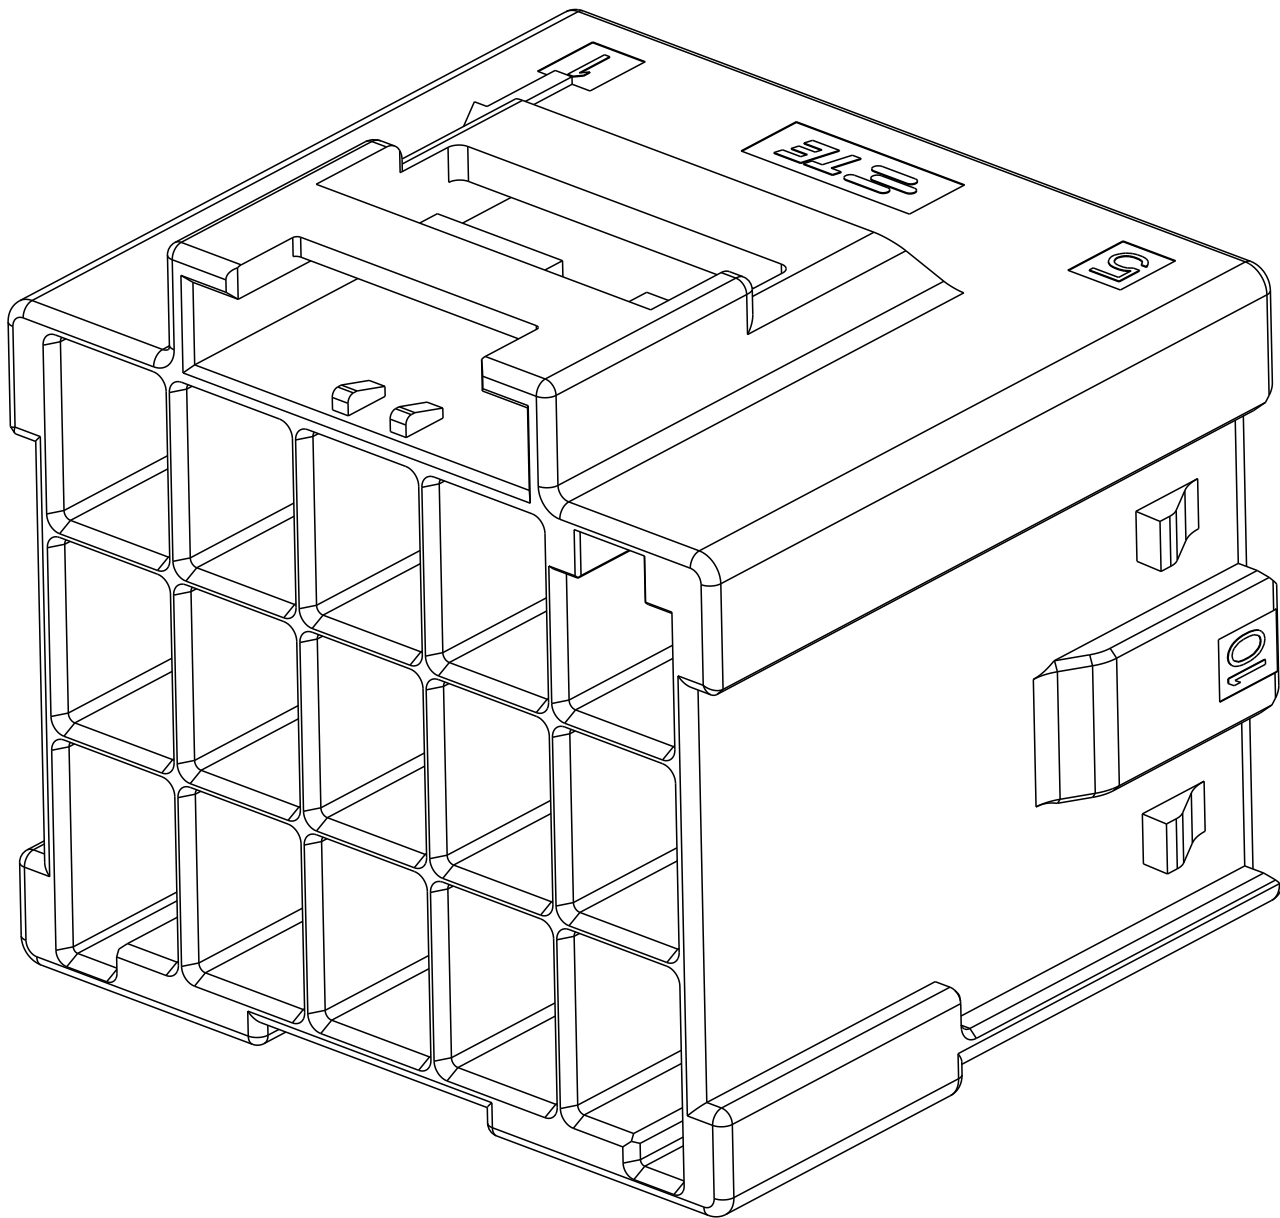
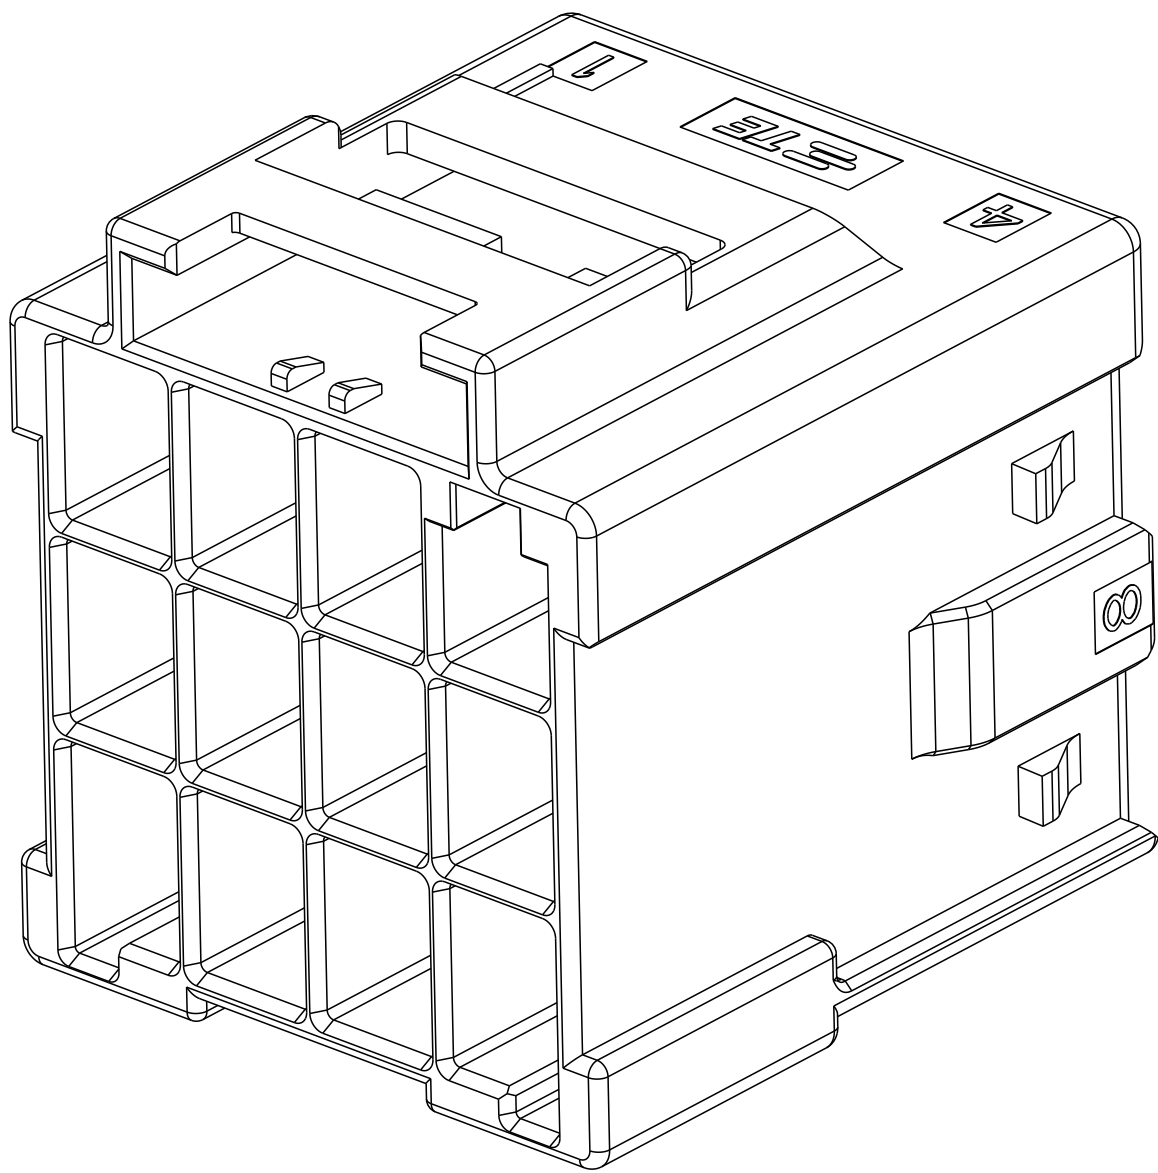
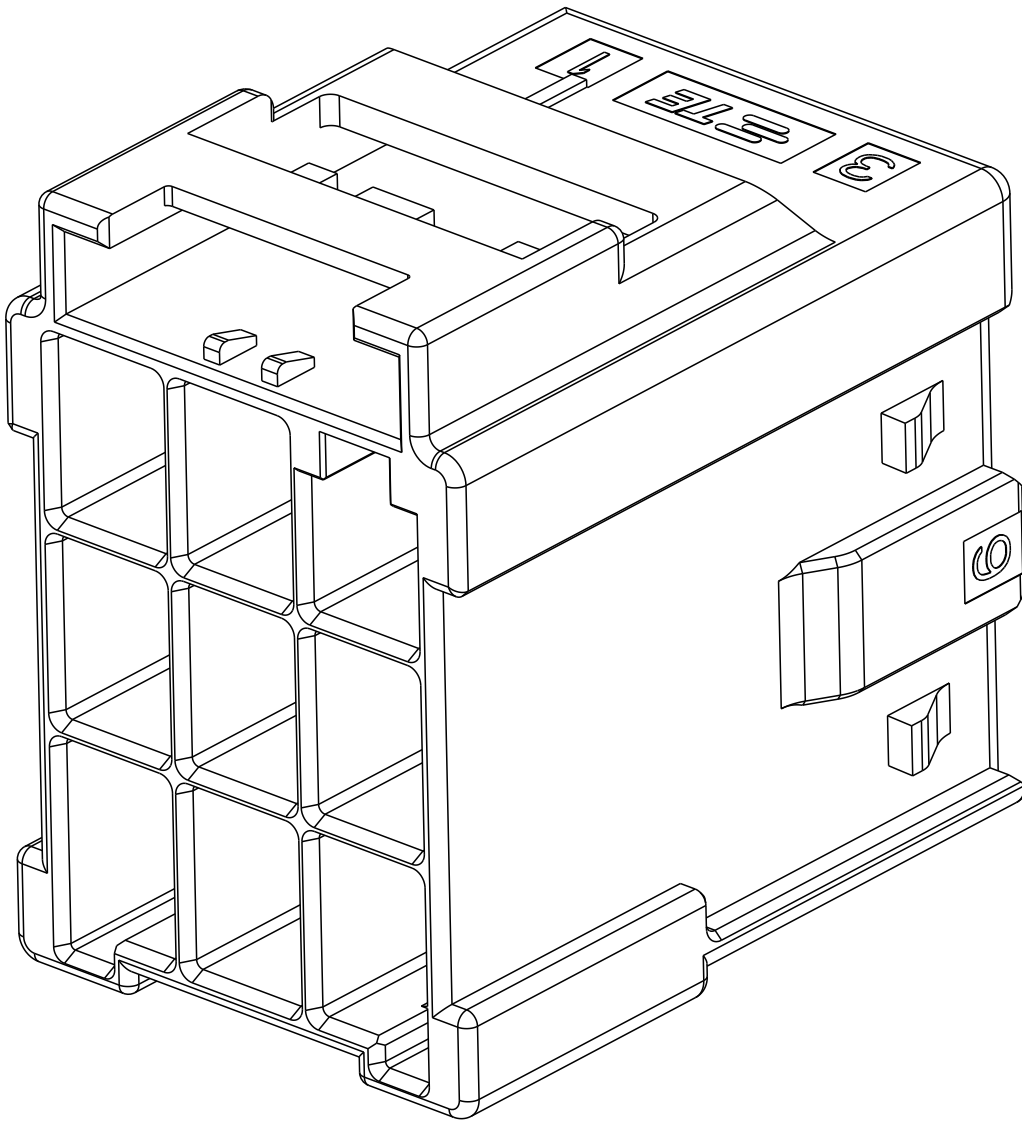


3*5	LEVEL A	DARK GREY	KEY A	5-2232360-7
		BROWN	KEY B	6-2232360-7
		GREEN	KEY C	7-2232360-7
		ORANGE	KEY D	8-2232360-7
3*4	LEVEL B	BLACK	KEY A	1-2232360-5
		DARK GREY	KEY A	5-2232360-4
		BROWN	KEY B	6-2232360-4
		GREEN	KEY C	7-2232360-4
3*3	LEVEL A	ORANGE	KEY D	8-2232360-4
		BLACK	KEY A	1-2232360-4
		DARK GREY	KEY A	5-2232360-3
		BROWN	KEY B	6-2232360-3
POS.	MATERIAL	GREEN	KEY C	7-2232360-3
		ORANGE	KEY D	8-2232360-3
		COLOR	KEY	P/N

3*3 POSITIONS

3*4 POSITIONS

3*5 POSITIONS

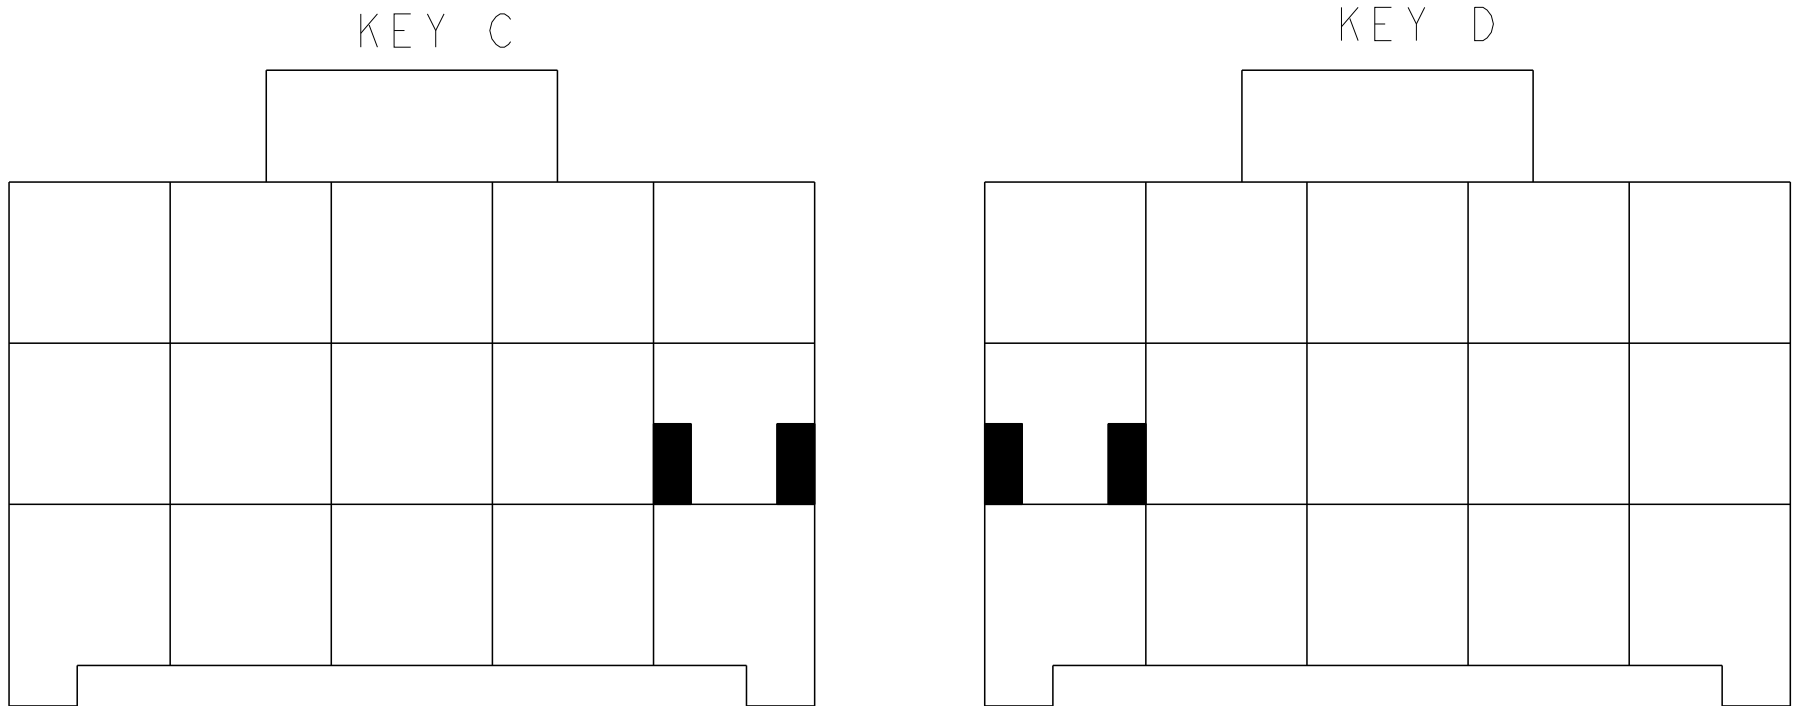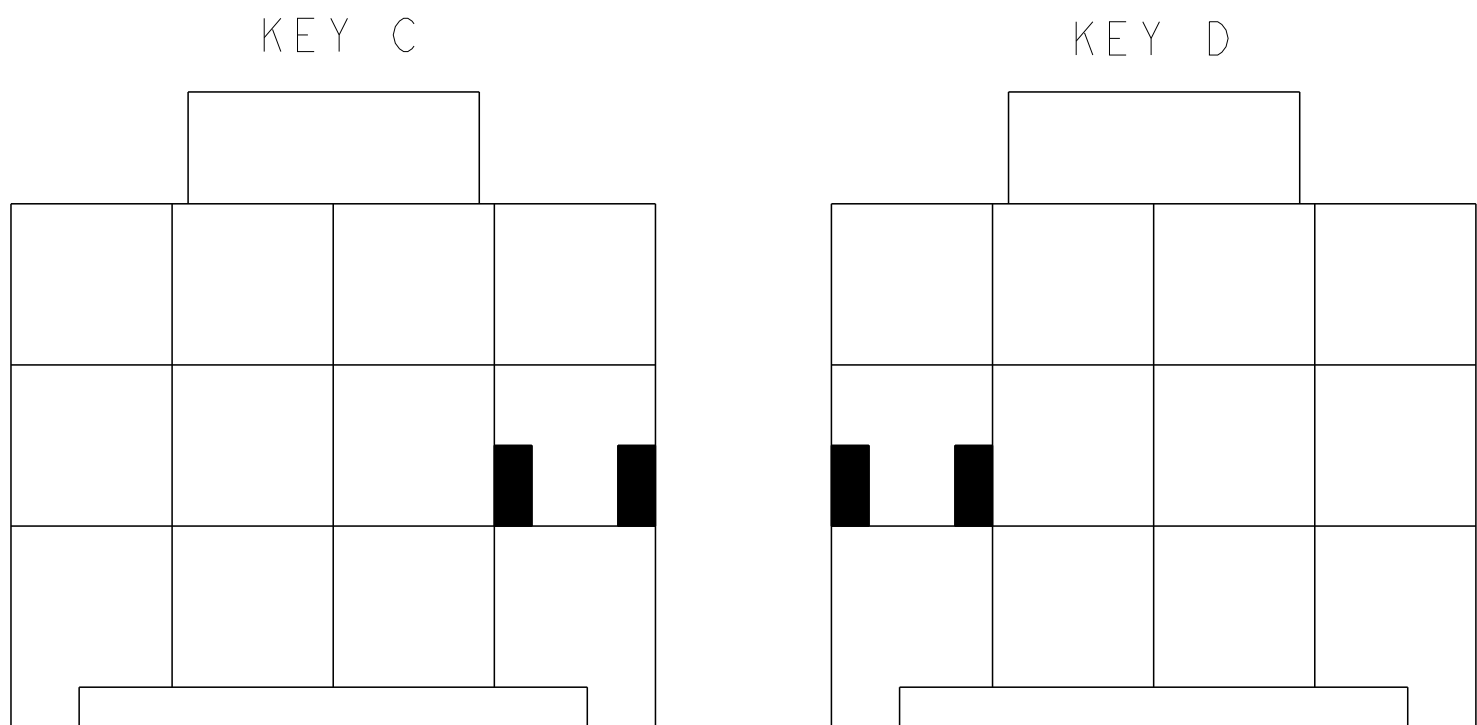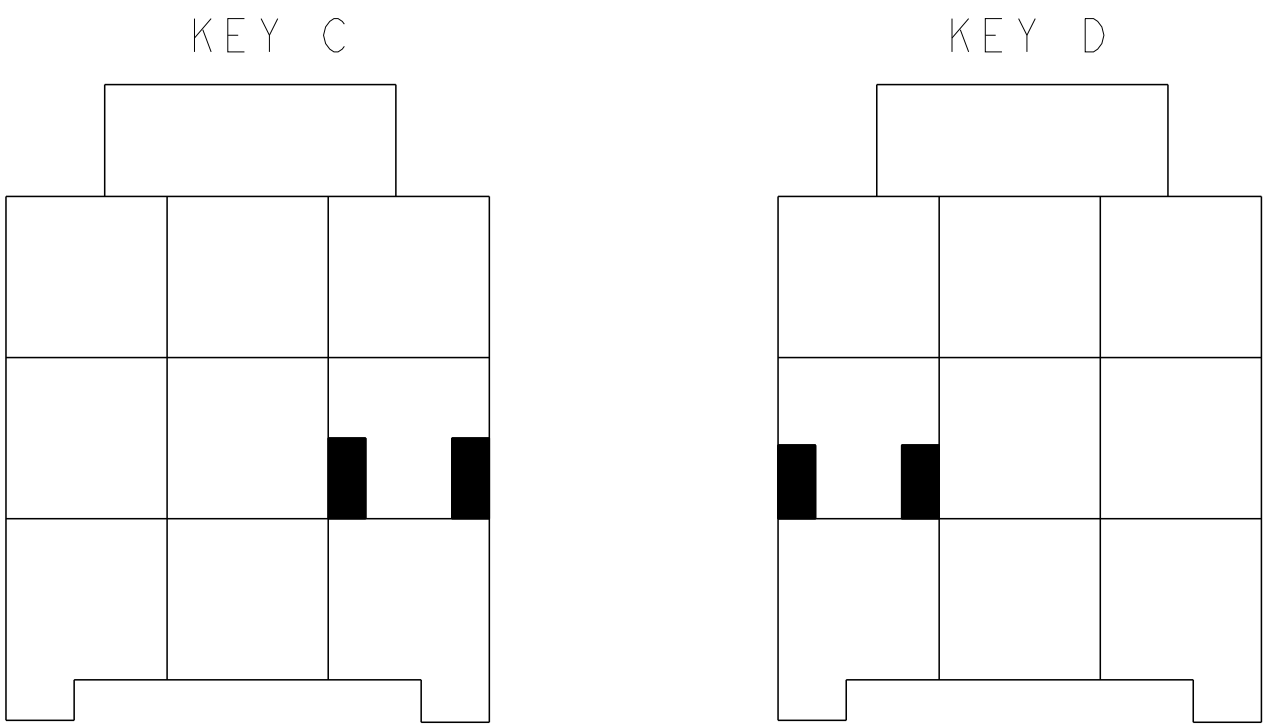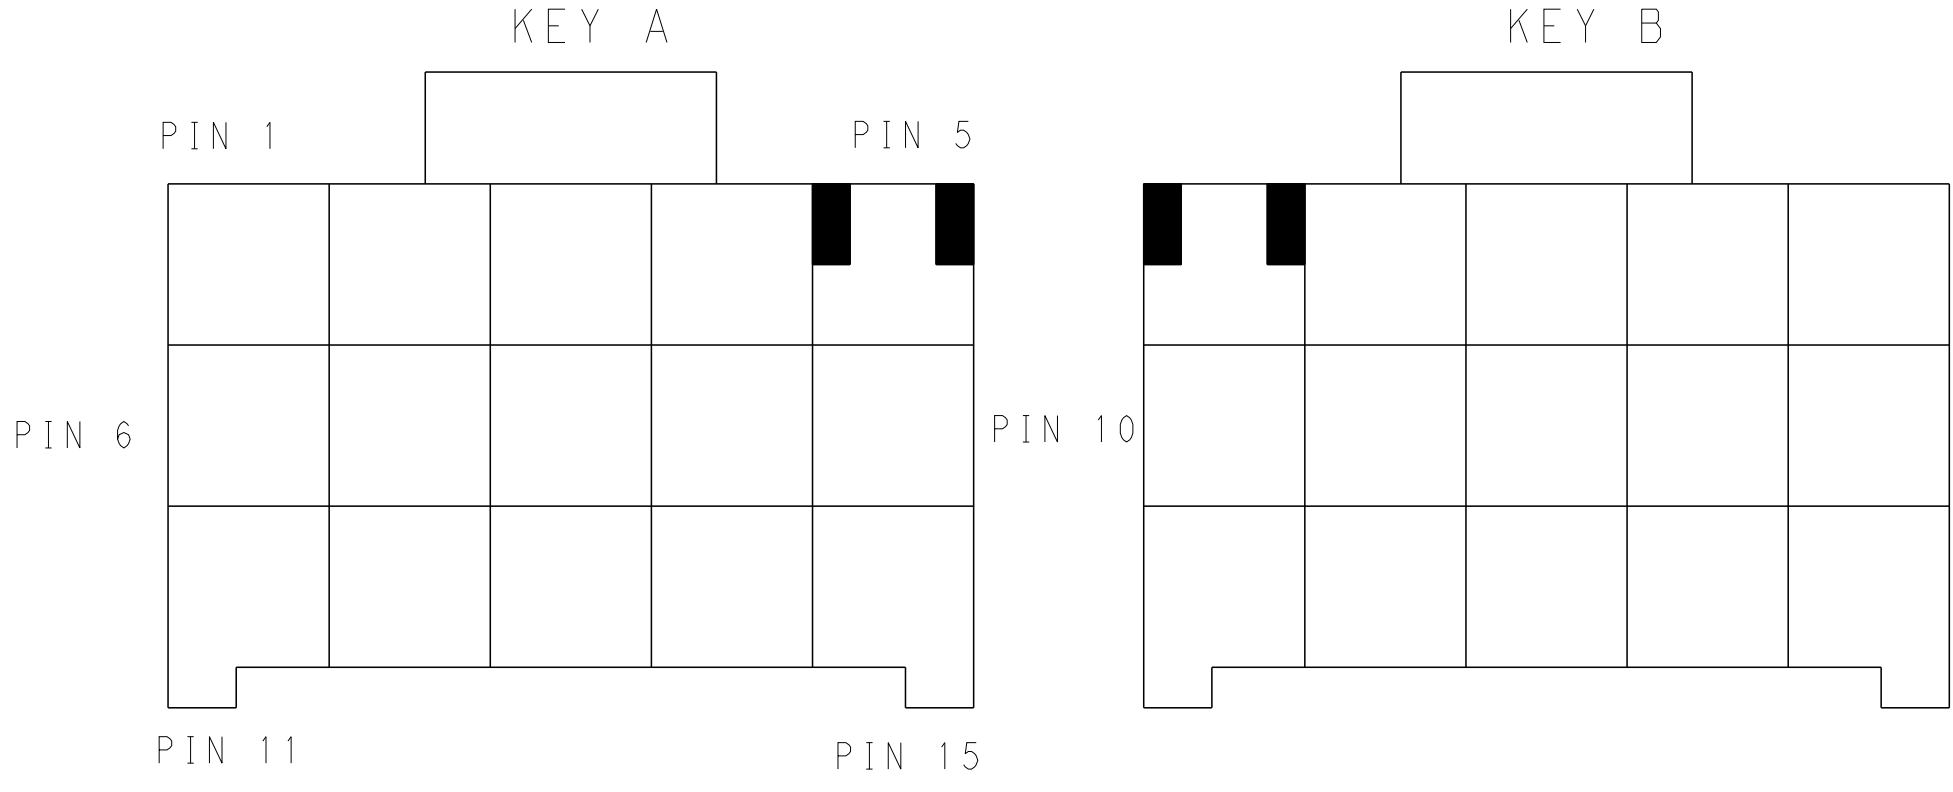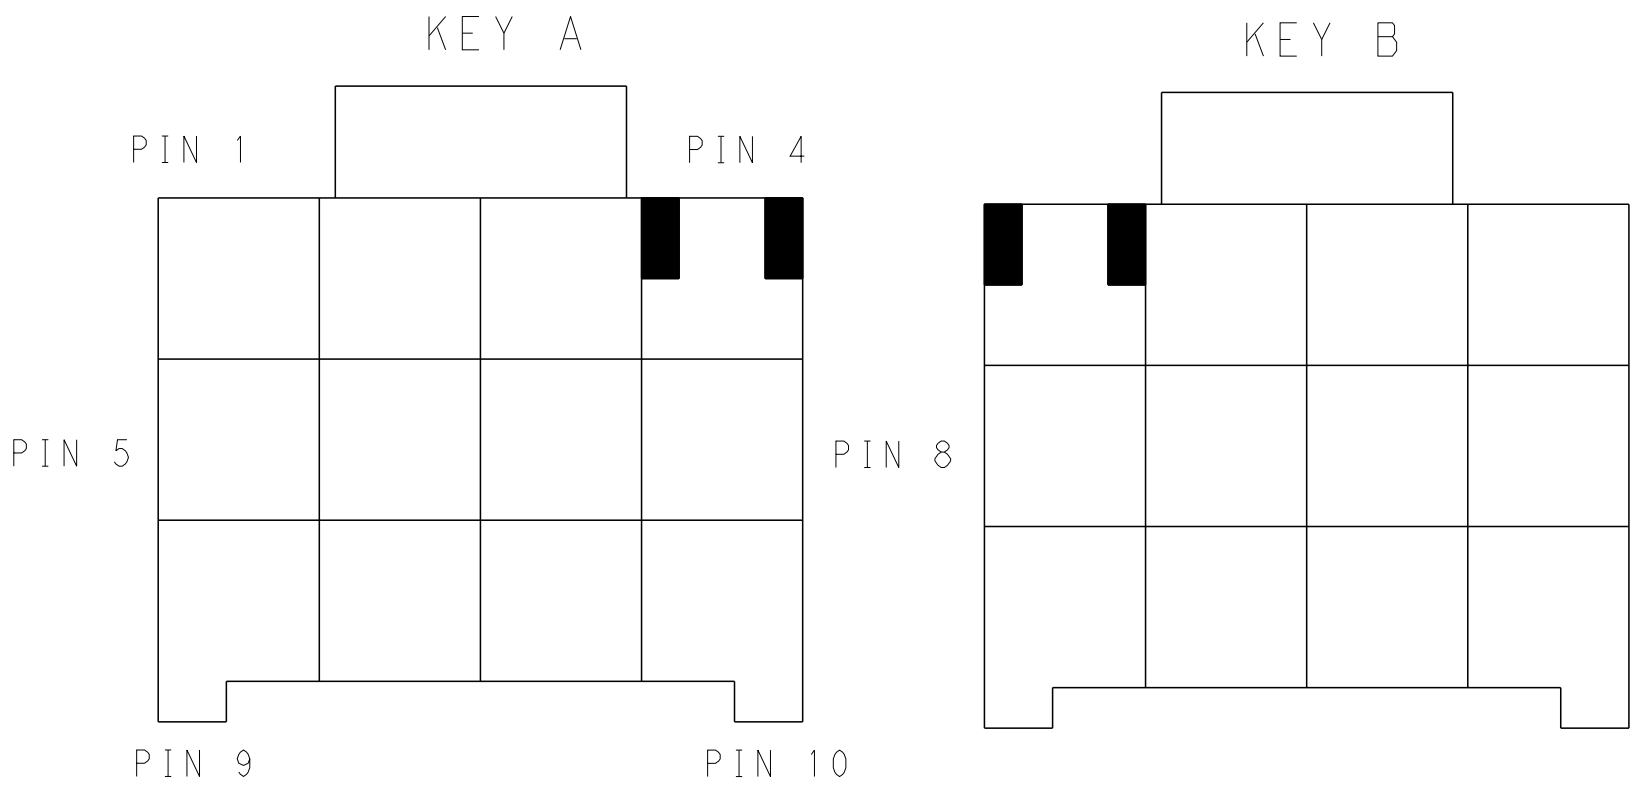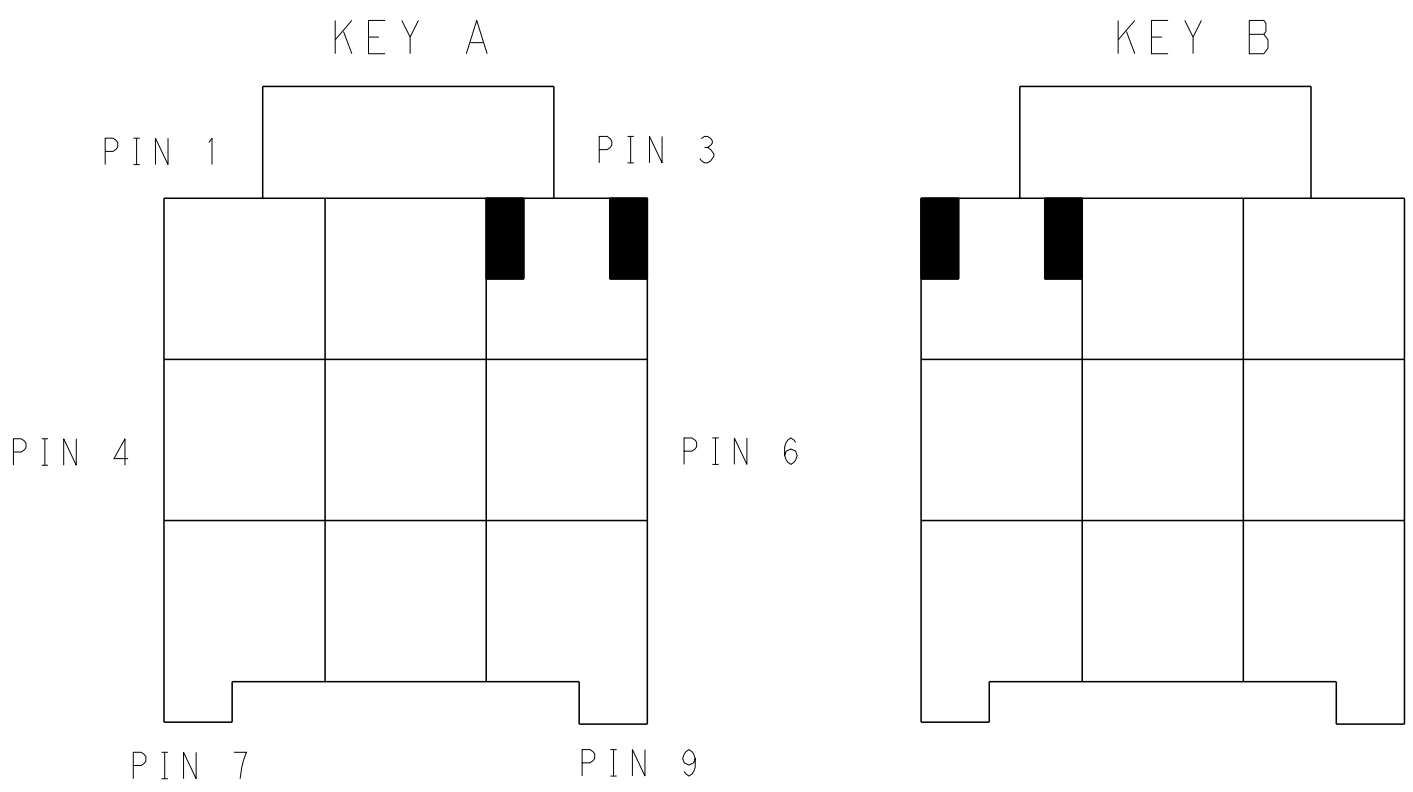

KEYING FOR 3*3 POS.

KEYING FOR 3*4 POS.

KEYING FOR 3*5 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

TOMMY.WU

26MAR2013

CHK

HAPYE.WU

26MAR2013

APVD

YUZHONG.MAO

26MAR2013

DIMENSIONS:

mm

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

FINISH

±

±0.35

±0.25

±

±

±

±

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC

108-106118

APPLICATION SPEC

114-106118

WEIGHT

-

MATERIAL

-

NAME

CAP HOUSING,FREE HANGING,TRIPLE ROW POWER TRIPLE LOCK

SIZE

CAGE CODE

DRAWING NO

100779

REV

B

TE Connectivity

Customer Drawing

SCALE

-

SHEET

2

OF

2