


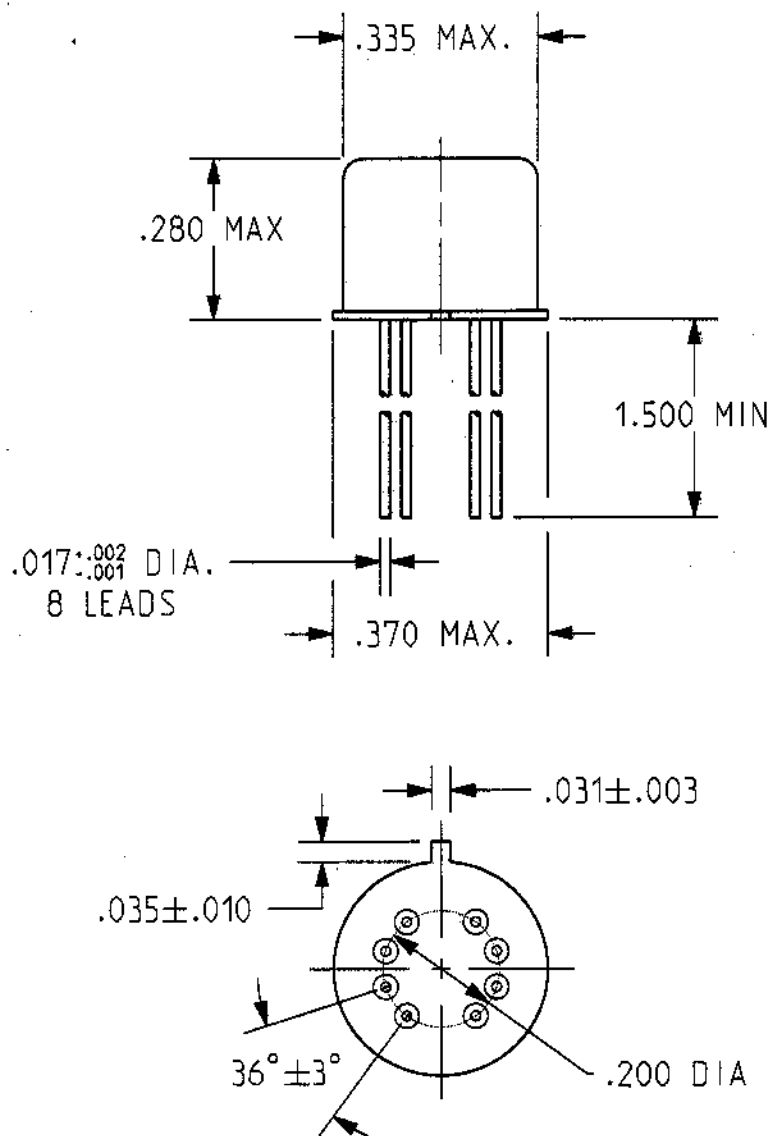

REV. 0

DCO 143545


COIL: @ 25°C
 RESISTANCE 63 OHMS ±10%
 NOMINAL VOLTAGE 5.0 VDC
 MUST OPERATE 3.0 VDC
 TURN-ON BASE CURRENT 0.60 mADC
 MUST RELEASE 1.7 VDC MAX, 0.24 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: TURN-ON TIME 2.0 MS MAX.
 TURN-OFF TIME 7.5 MS MAX.
 CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 06MAY02

CLIPPER 5/6/02

CII Technologies
 advanced control electronic solutions

CUST. QPL
 CUST. NO. M28776/5-013L REV.

"J1MAT" RELAY

J1MAW T-5XL