
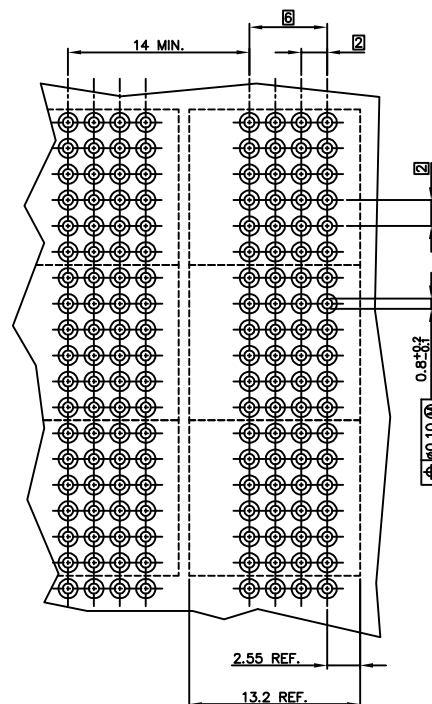
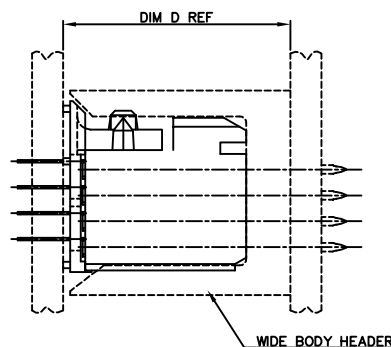
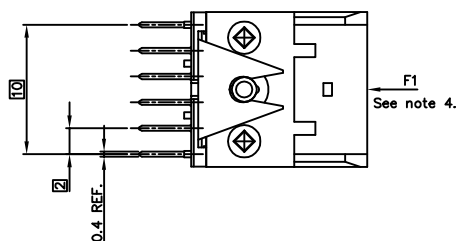
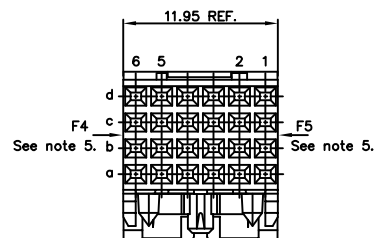


PLATING CONTACT AREA:		ERICSSON P/N
DASH NR:	PERFORMANCE LEVEL	SEE NOTE 7
-1YYLF	CUSTOMER SPECIAL	
-7YYLF	CUSTOMER SPECIAL	RNV 604 1111/1

DASH NR	CONFIGURATION						PCB THICKN.	DIM A	DIM B	DIM C	DIM D	
	ROW #	6	5	4	3	2						1
-X01LF	D	+	+	+	+	+	2.4	14.14	3.50	0.54	17.64	
	C	+	+	+	+	+						+
	B	+	+	+	+	+						+
	A	+	+	+	+	+						+
"+" POSITION LOADED												

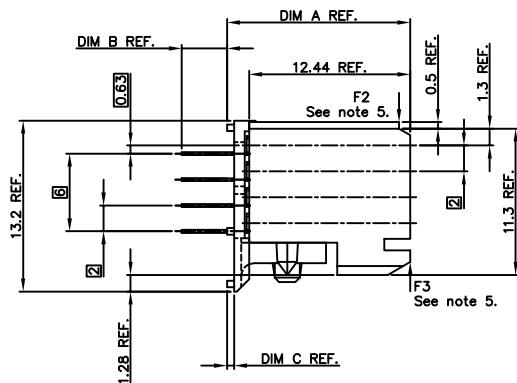

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

NOTES:

- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
- TERMINAL MATERIAL: PHOSPHOR BRONZE.
- PLATING SOLDER TAILS 2-8 μ m
PURE Sn FOR LEAD FREE.
- LOAD IN THIS DIRECTION (E.G. THROUGH CODING) 30 NEWTON MAXIMUM PER CONNECTOR.
- LOAD IN THIS DIRECTION 15 NEWTON MAXIMUM PER CONNECTOR.
- TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD THE USE OF A FIXTURE IS RECOMMENDED.
- PRODUCT MARKING: ERICSSON PARTNUMBER & BATCH I.D.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

mat'l. code	tolerances unless otherwise specified	CUSTOMER COPY	projection	title
lit. ech. no. d.r. date				
A. H80210 [PHE] 980403	linear			STR SIGN RCP
B. H80380 [PHE] 980816				STB + WAFER 12mm
C. 0001-0101 [Glu] 041228	crystals			product family METAL (cm)
D. 0001-0001 [Glu] 041228	crystals			code
E. 0009-0171 [TER] 0410/08 [eng] W. van Aalst	980403			size dvg no
F. 0010-0001 [Glu] 0410/08 [eng] W. van Aalst	980403			213
sheet index	revision	scale	size	sheet
1	F	1:1	A1	1 of 1