

D

C

B









A

D

C

B

A

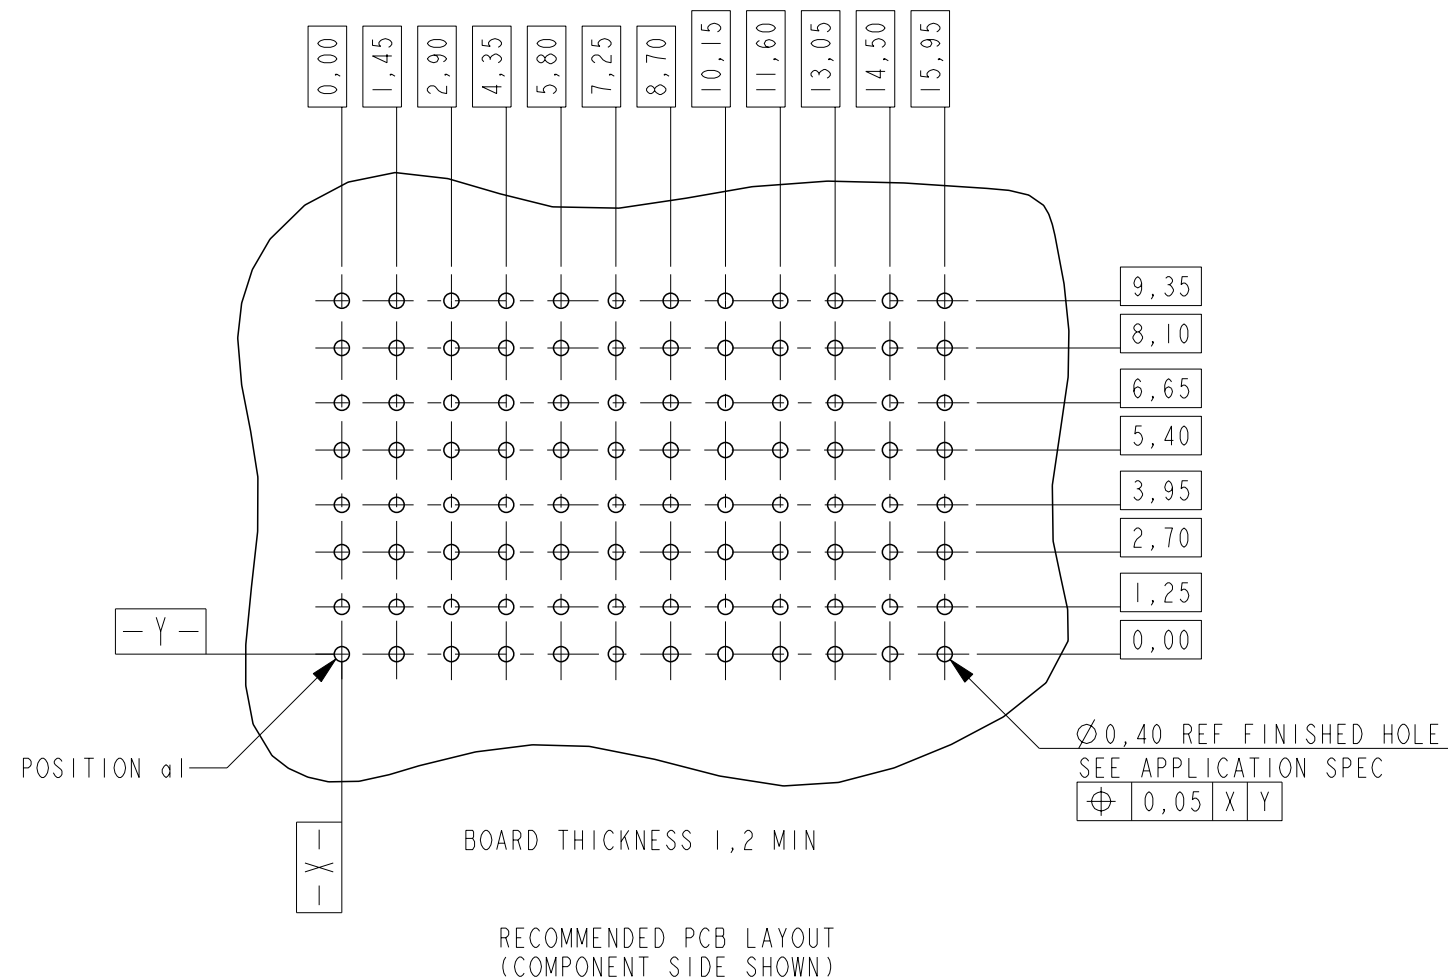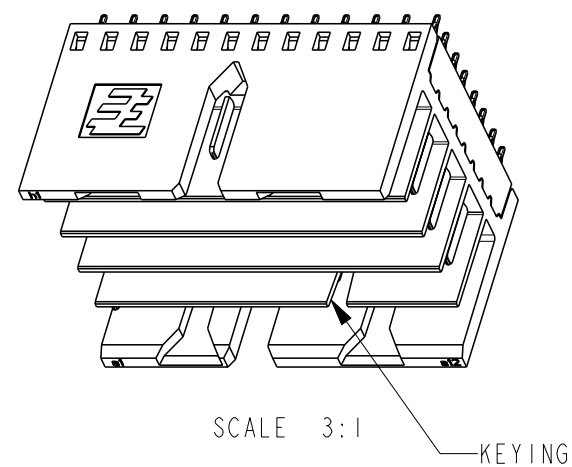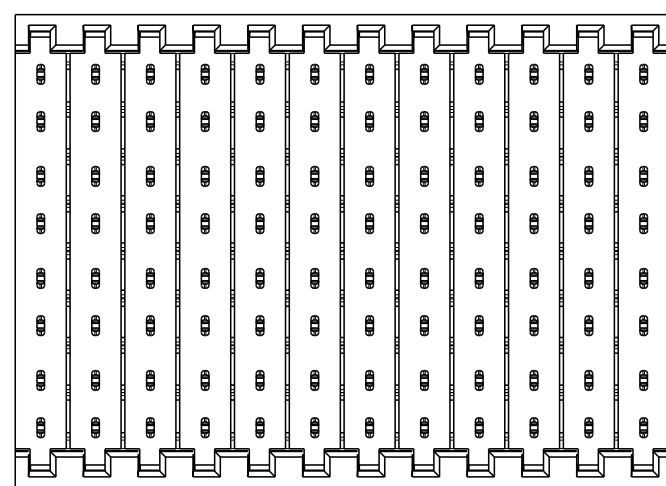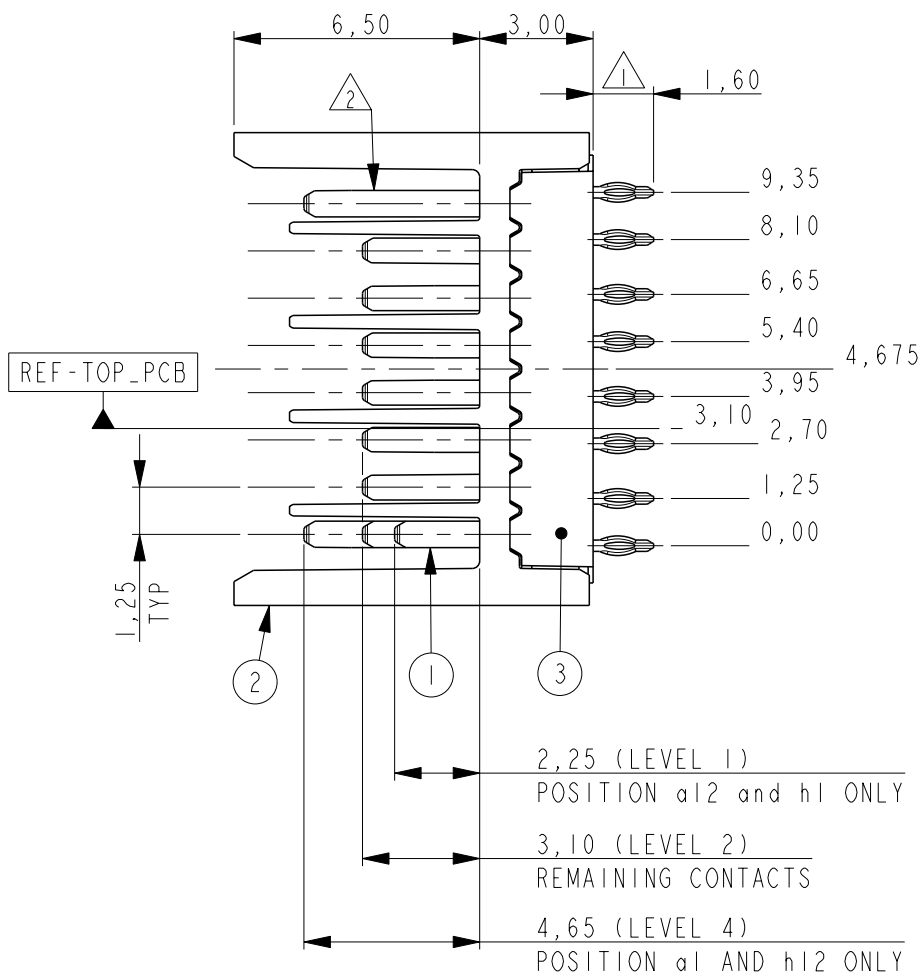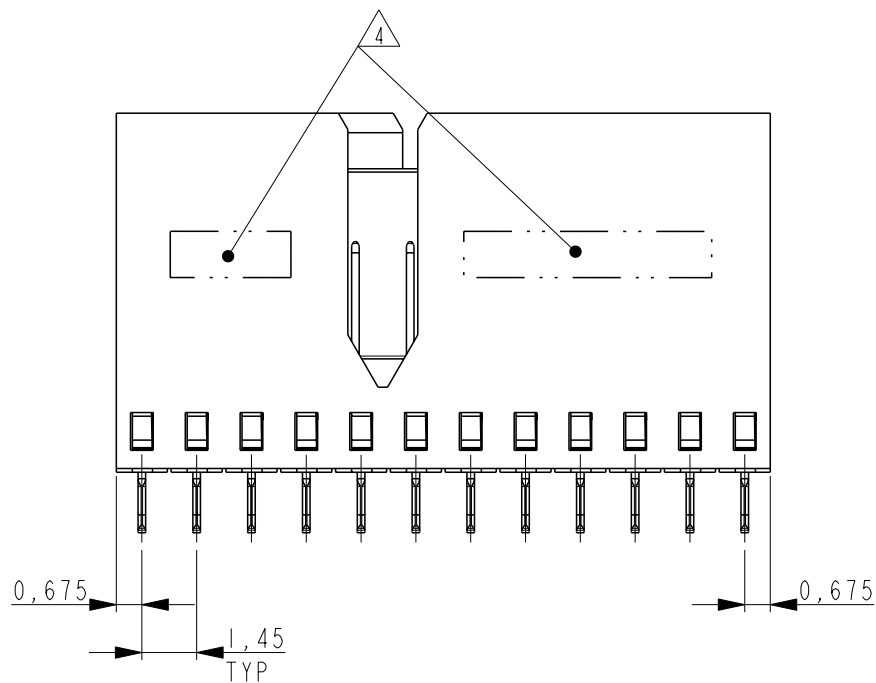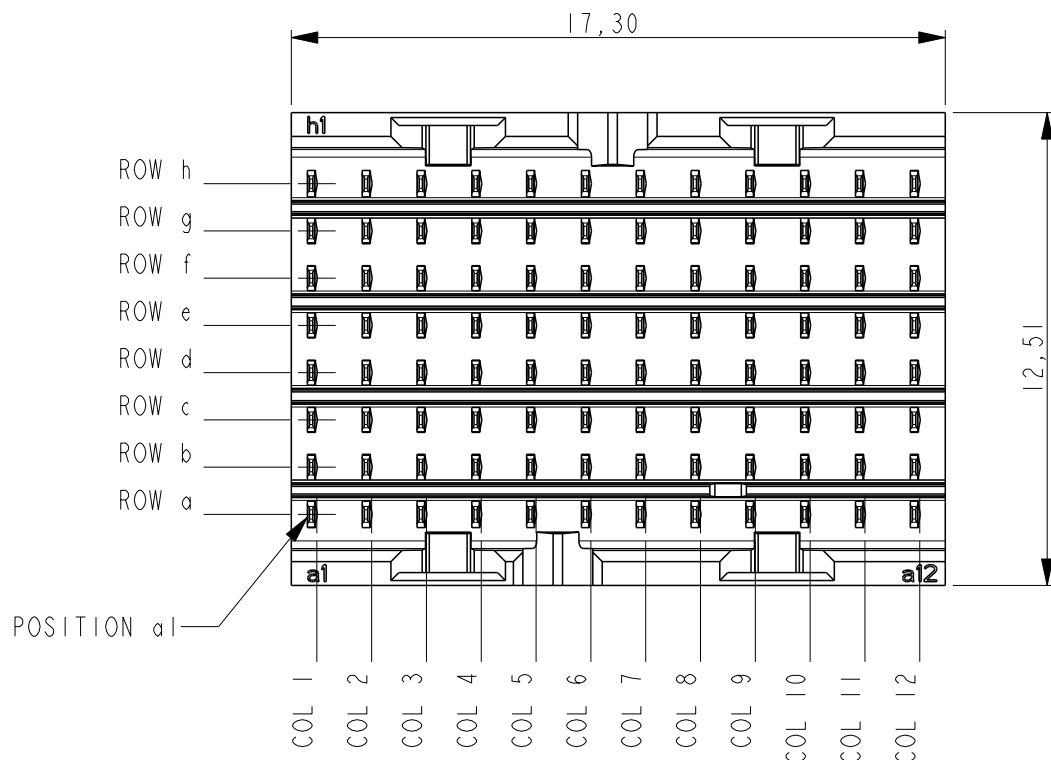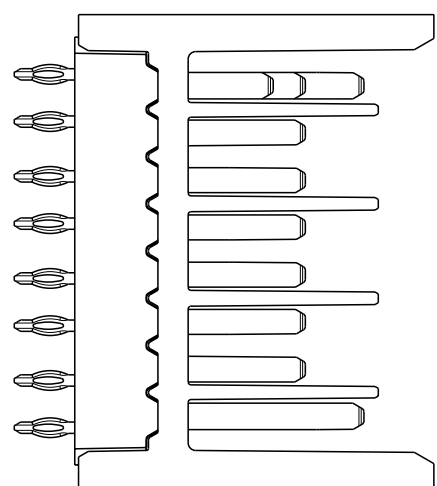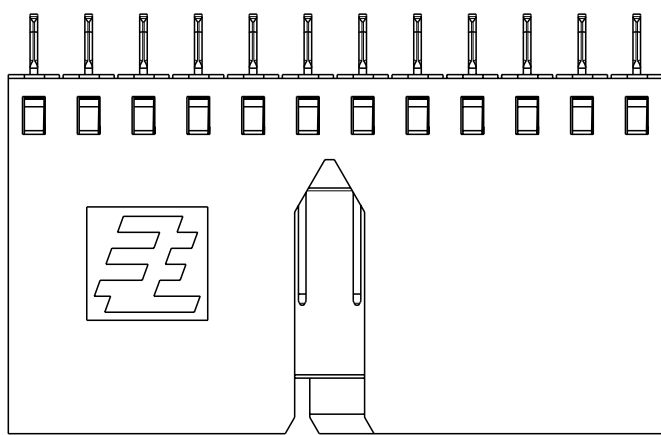

NOTES:

- 1 PLATING: 0,5µm MIN. TIN OVER NICKEL.
- 2 PLATING:

PARTNUMBER	PERFORMANCE LEVEL
2042257-1	PERFORMANCE LEVEL 1: CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III: UNCONTROLLED ENVIRONMENT APPLICATIONS. SEE PRODUCT SPEC 108-19353
2042257-2	PERFORMANCE LEVEL 2: CONFORMS TO ALL TESTING ACCORDING PRODUCT SPEC 108-19320, -250 MATING CYCLES, 4 DAYS MIXED GAS TEST PER IEC 60068-2-60 METHOD I

- 3 CONSULT APPLICATION SPEC OR CONTACT TE CONNECTIVITY FOR PERMISSIBLE CONTACT ASSIGNMENTS.
- 4 CONNECTOR MARKED WITH PARTNUMBER AND DATE CODE.
- 5 FOR PC-BOARD ROUTING RECOMMENDATIONS SEE SPEC 114-19140

PRODUCT HAS NOT COMPLETED
QUALIFICATION TESTING

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	RA	13 MARCH 08
DIMENSIONS:		CHK	RA	13 MARCH 08
mm		APVD	MW	13 MARCH 08
		PRODUCT SPEC		
		SEE NOTE 2		
		APPLICATION SPEC		
		114-19106		
MATERIAL		WEIGHT		
-		-		
		CUSTOMER DRAWING		

3	OVERMOLD	LCP 30% GF NATURAL
2	HOUSING	LCP 30% GF NATURAL
1	CONTACT	COPPER ALLOY

ITEM NO.	DESCRIPTION	MATERIAL

TE Connectivity

NAME		MALE CONNECTOR Z-PACK Slim UHD		
		-		
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
A2	00779	C-2042257	-	
SCALE		5:1	SHEET	OF
			1	REV
				A