



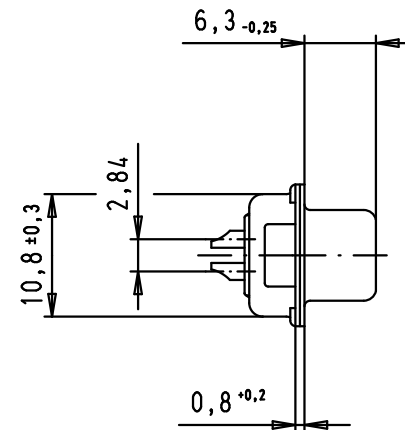


Mating cycles	500
Filter type	C
Capacitance	1000 pF±20%
Working voltage	100 V
Current rating	7,5 A
Insulation resistance	>1 GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	1
10	3
50	12
100	20
500	34
1000	30

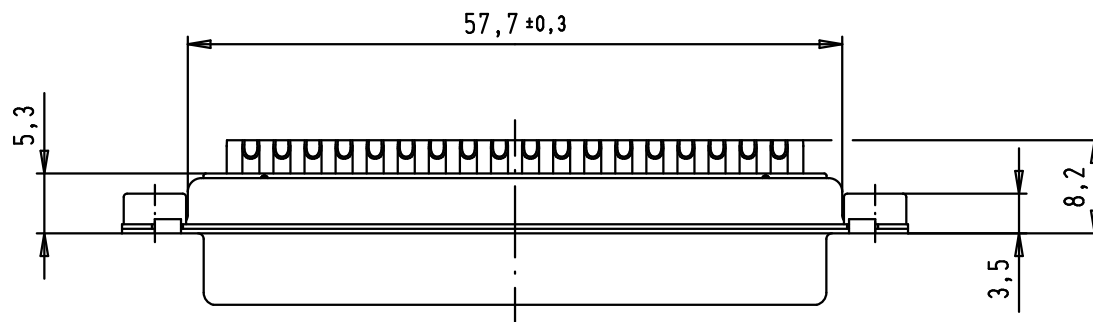

Solder buckets for AWG 20

				Dat.	Name
			Detail.	08/07/02	CV
			Insp.		
35300	01/12/08	PK	Stand.		
33800	21/08/06	PK	HARTING EURL F-95972 Paris		
31058	08/07/02	CV			
Mod.	Dat.	Name			



All Dim. in mm
Orig. Size DIN A 4



D-Sub, female, straight, 37 poles, turned solder buckets and clinch nuts	
--	--

Moßstab/
Scale

1,5:1

09 64 411 7238	M3
09 64 411 7237	4-40 UNC-2B
Part number	Nut thread

33800	21/08/06	PK	HARTING EURL F-95972 Paris
31058	08/07/02	CV	
Mod.	Dot.	Nome	

TB 09 64 411 723X

Sub.

Blatt/ Page

 $\frac{1}{1}$