


NOTES:

- DIN 1.0/2.3 FEED-THRU CONNECTOR SPECIFICATIONS:**
 IMPEDANCE: 75 Ω
 FREQUENCY RANGE: 0-3 GHz
 W/S VOLTAGE: 250 Vrms
 INSULATION RESISTANCE: 1 GΩ min.
 CONTACT RESISTANCE: 30 mΩ max. (Initial)
 INSERTION LOSS: -1.0 dB max.
 RETURN LOSS: per SMPTE 424 M
 OPERATING TEMPERATURE: -40°C to +85°C
 LIFE: 500 cycles min.
- MATERIALS:**
 FRONT PANEL - ALUMINUM, ANODIZED
 INSERT - THERMOPLASTIC, BLACK
 CONNECTOR SHELL - COPPER ALLOY, NICKEL PLATED
 CONTACT: COPPER ALLOY, GOLD PLATED
 INSULATORS: THERMOPLASTIC
 HORIZONTAL MARKING STRIP - THERMOPLASTIC, WHITE
 DESIGNATION STRIP COVER - THERMOPLASTIC, CLEAR
 KEY-HOLE CLIPS - THERMOPLASTIC
 SCREWS - STEEL, ZINC OR NICKEL PLATED
- SUPPLIED WITH (4) #12-24 MOUNTING SCREWS.
- DIMENSIONS SHOWN FOR REFERENCE ONLY
- THIS PRODUCT IS RoHS COMPLIANT

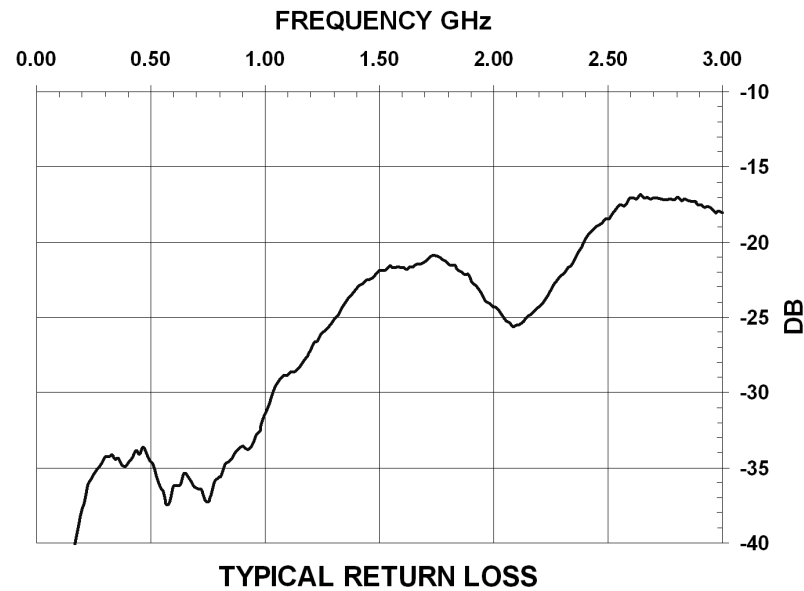

CUSTOMER DRAWING

REV	ECO NUMBER	DATE	BY	APVD
A	26775	06/09/11	BL	TJK
REVISIONS				

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES
 - TWO PLACE DECIMALS ±0.02
 - THREE PLACE DECIMALS ±0.005

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.									
SIZE	WIDTH	MULT	LBS/M	TEMPER					
FINISH					MATERIAL				
SPEC No.					SPEC No.				
FIRST USED ON					SCALE				
					1:2				
DATE DRAWN	BY	CHKD	APVD						
5/17/10	PNK	PNK	SRC						
		5/17/10	5/17/10						
NAME				PART No.			REV		
DIN 1.0/2.3 FEED-THRU PATCHBAY, RoHS				DIN96K1D			A		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Switchcraft:](#)

[DIN96K1D](#)