


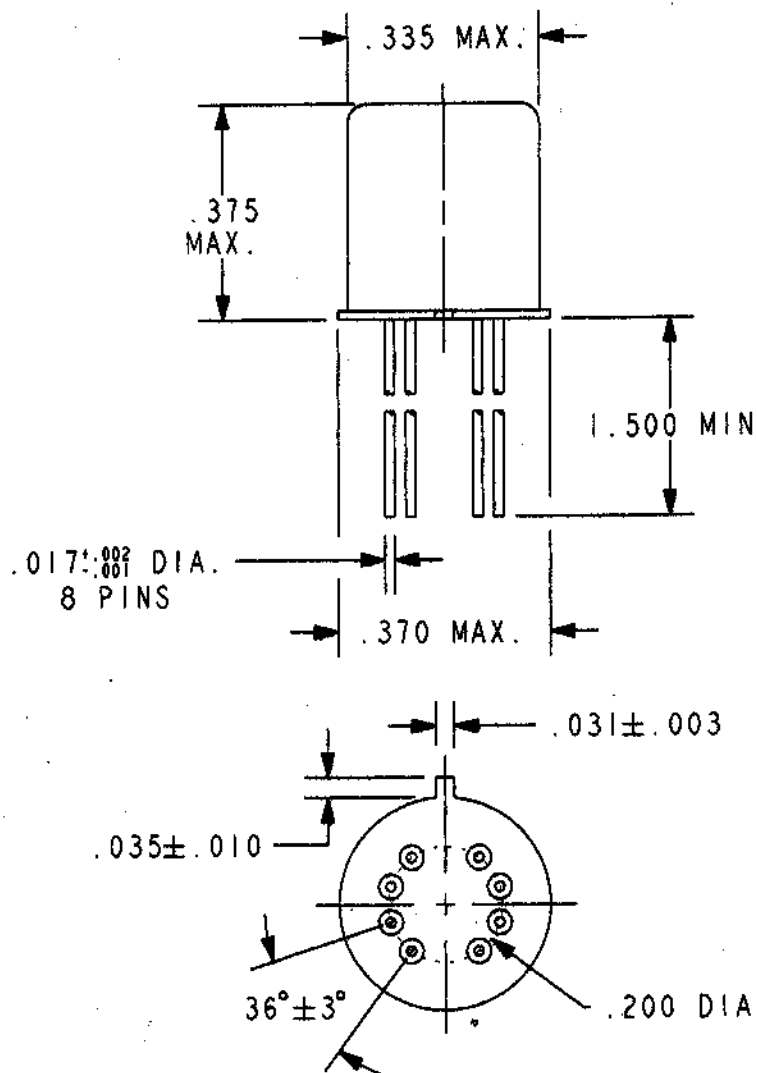

REV. 0

DCO 143435

COIL: @ 25°C
 RESISTANCE: 3300 OHMS ±10%
 NOMINAL VOLTAGE: 26.5 VDC
 MUST OPERATE: 14.0 VDC
 MUST RELEASE: 8.0 VDC MAX, 1.4 VDC MIN.

ENVIRONMENT:

VIBRATION 10 Hz TO 3000 Hz @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX.

RELEASE TIME 2.0 MS MAX.

CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 1/30/02

1/20/02

CH Technologies
 advanced control electronic solutions

CUST. QPL
 CUST. NO. M39016/11-023L REV.

"JMS" RELAY

JMSW-26XL