

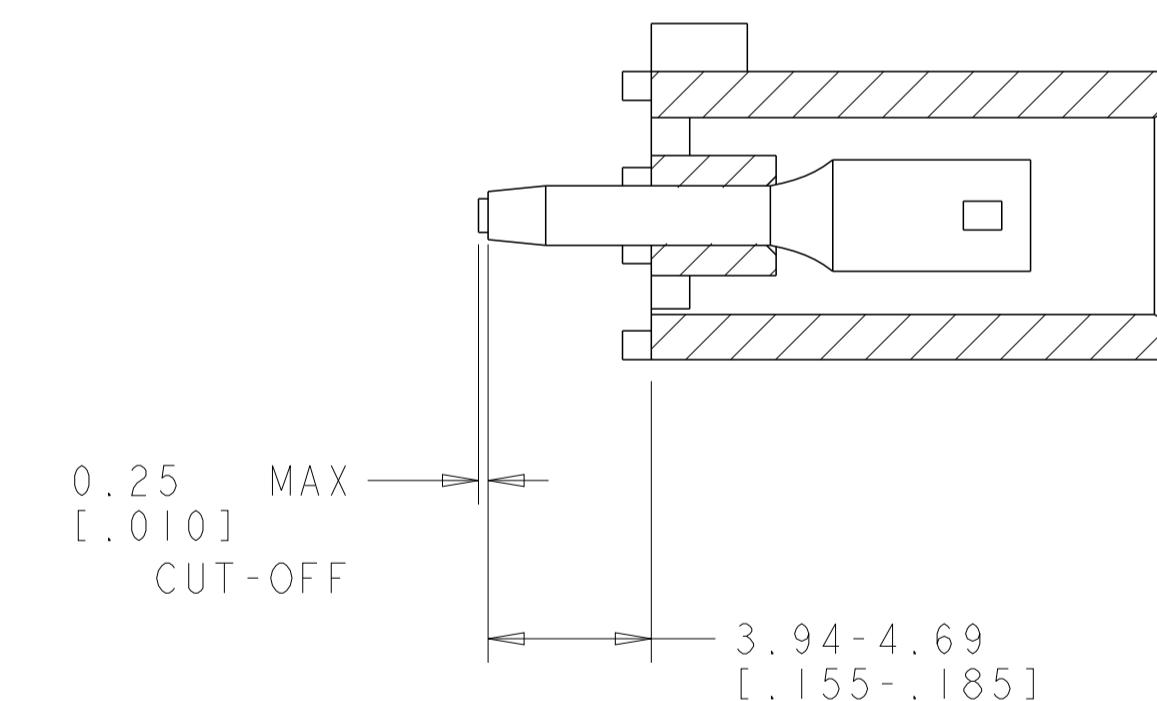
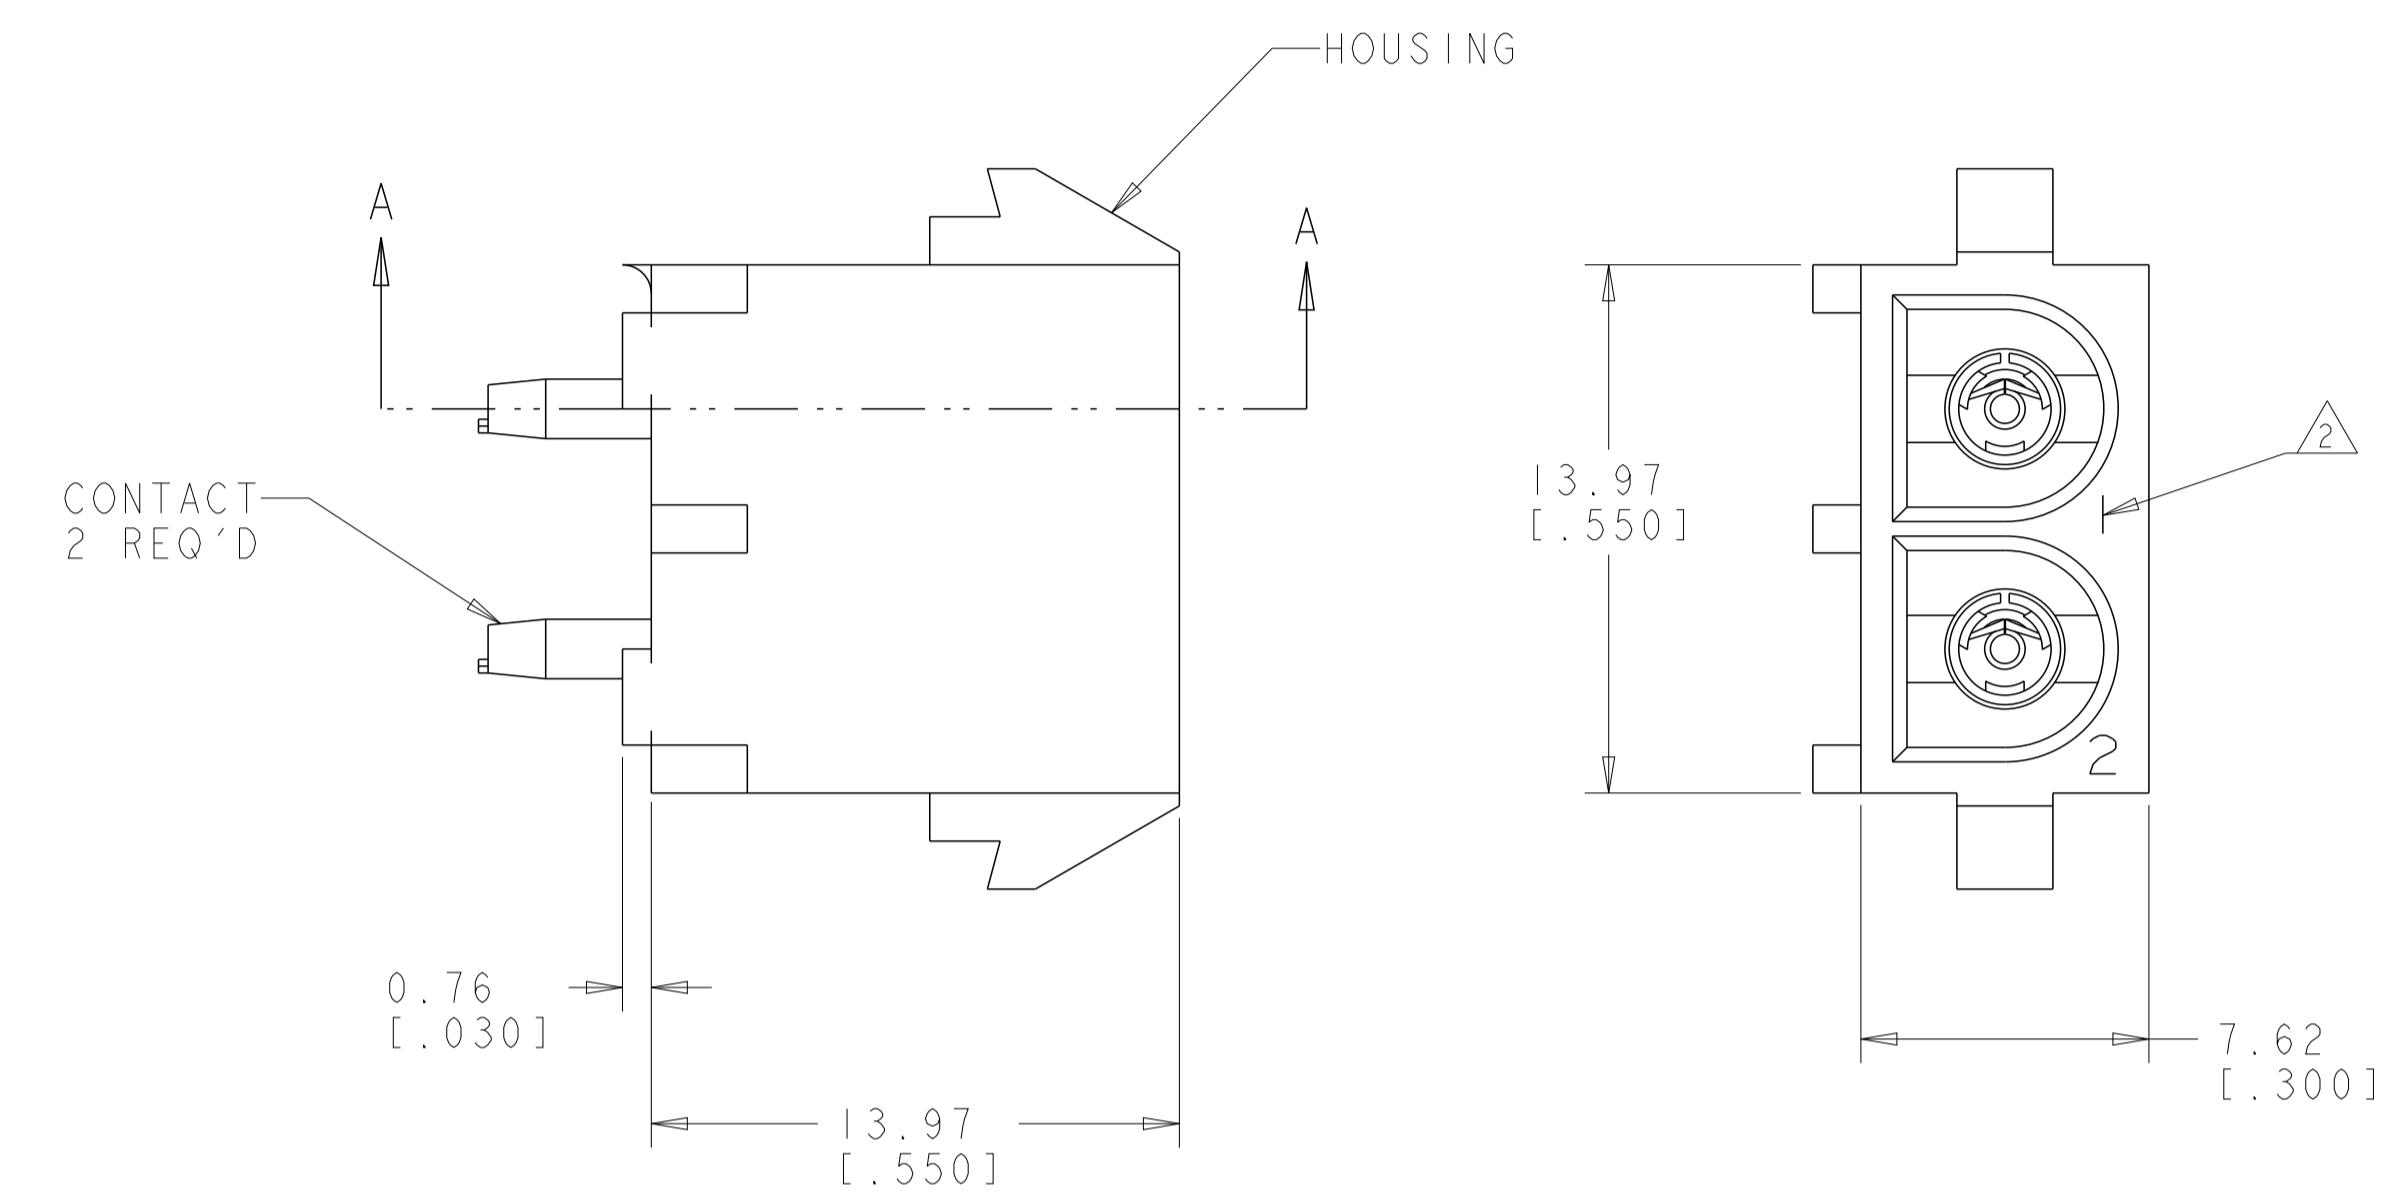



REVISIONS					
P	LTR	DESCRIPTION	DATE	DNW	APV
A		REVISED PER ECR-16-002640	10MAR2016	BW	EW

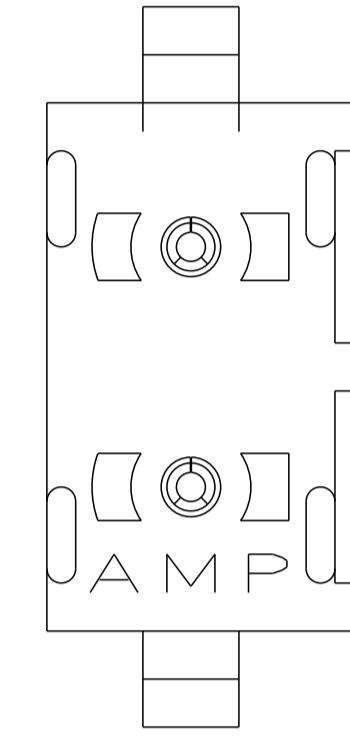

SECTION A-A

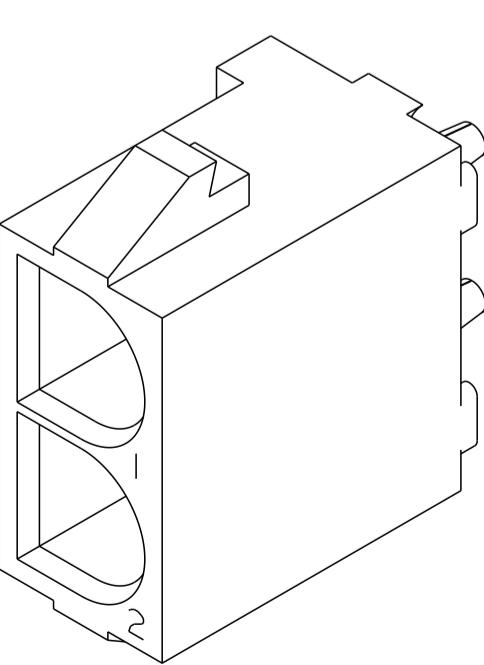

3 DIMENSIONAL VIEW  
SCALE 4:1

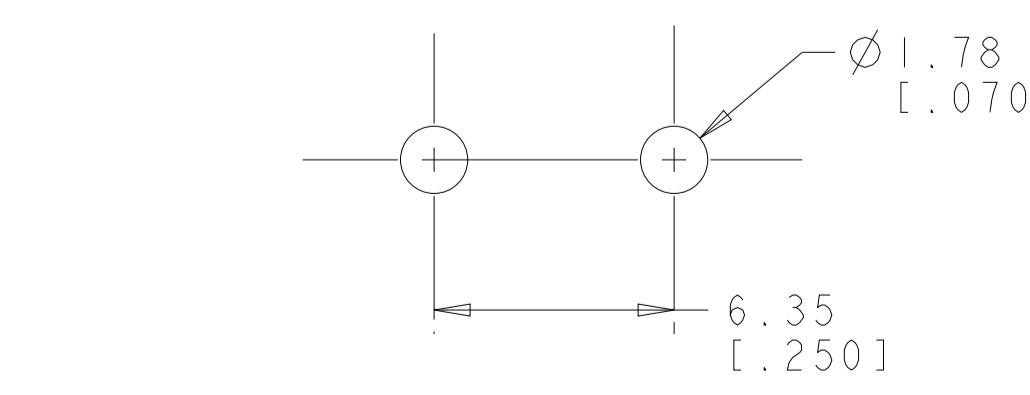

RECOMMENDED MOUNTING HOLE PATTERN  
FOR 1.57 [ .062 ] THICK P.C. BOARD

1. PARTS COMPLY TO TYCO ELECTRONICS SOLDERABILITY SPECIFICATION 109-11-2.

2. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.

3. DIMENSIONS IN BRACKETS ARE IN INCHES.

4. FLAMMABILITY UL V-0 FOR THICKNESS 0.4, 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-11-10.

5. GLOW WIRE FLAMMABILITY (GWF1): 960°C FOR THICKNESS 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-2-12.

6. GLOW WIRE IGNITION (GWIT): 825°C FOR THICKNESS 0.45, 800°C FOR THICKNESS 0.8, 775°C FOR THICKNESS 1.6 AND 3.0 PER IEC 60695-2-13.

PHOSPOR BRONZE, PRE-TIN		NYLON, UL V-0 GW, NATURAL	1969795-1
CONTACT MATERIAL AND FINISH		HOUSING MATERIAL AND COLOR	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		DNW BASVESH WARAD 25DEC2015	
DIMENSIONS: mm [INCHES]	OTHERWISE SPECIFIED:	CHW WICKES, EVAN 25DEC2015	
0 PLC ± .000	1 PLC ± .000	2 PLC ± .000	NAME SOCKET HEADER ASSEMBLY, 2 CIRCUIT, W/DRAIN HOLES, UNIVERSAL MATE-N-LOK(TM)
1 PLC ± .000	3 PLC ± .000	3 PLC ± .000	
4 PLC ± .000	4 PLC ± .000	4 PLC ± .000	APPLICATION SPEC ANGLE: +0° 30°
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT -	SIZE CAGE CODE DRAWING NO A1 100779 C=1969795
			RESTRICTED TO - CUSTOMER DRAWING
			SCALE 5:1 SHEET 1 OF 1 REV A