

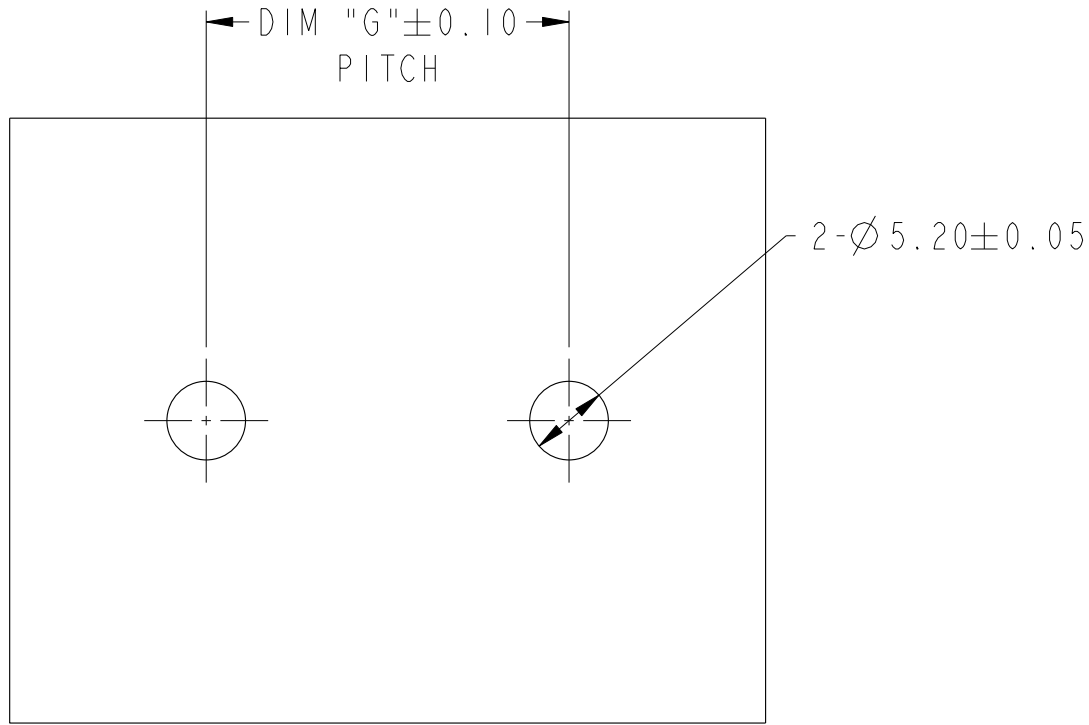
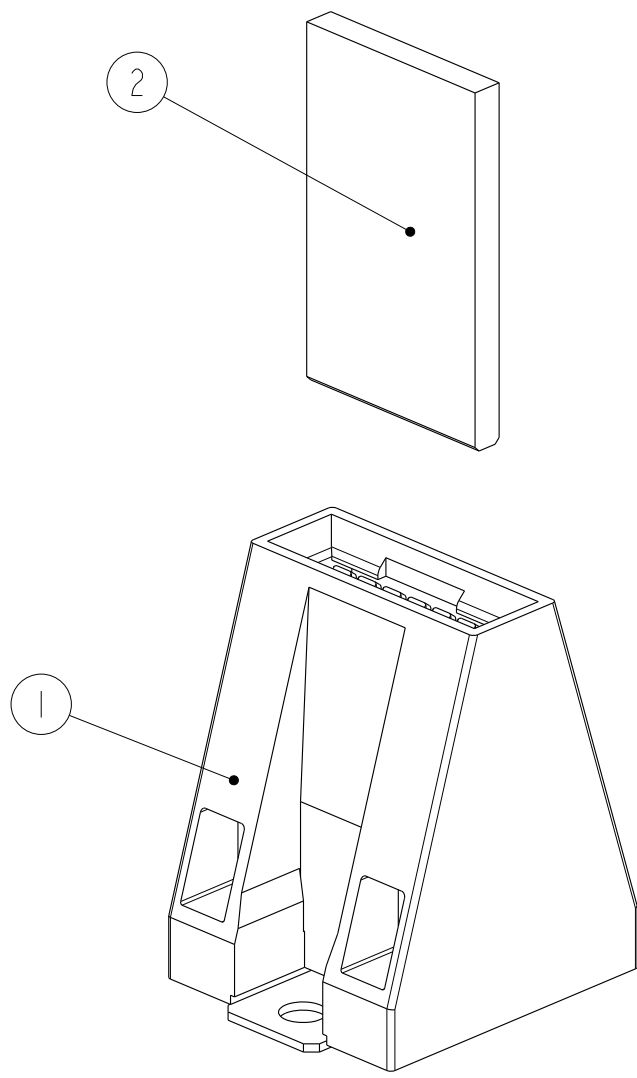



S.NO	DESCRIPTION	QTY	REMARKS
1	Product	1	OPEN / CLOSED SIDE WALL
2	MATING BUS-BAR	1	PLATING RECOMMENDATION:3 um Silver over 2.54 um Nickel
3	M4 SCREW	2	
4	M4 WASHER	4	
5	M4 NUT	2	
6	MOUNTING BUS-BAR	1	PLATING RECOMMENDATION:3 um Silver over 2.54 um Nickel

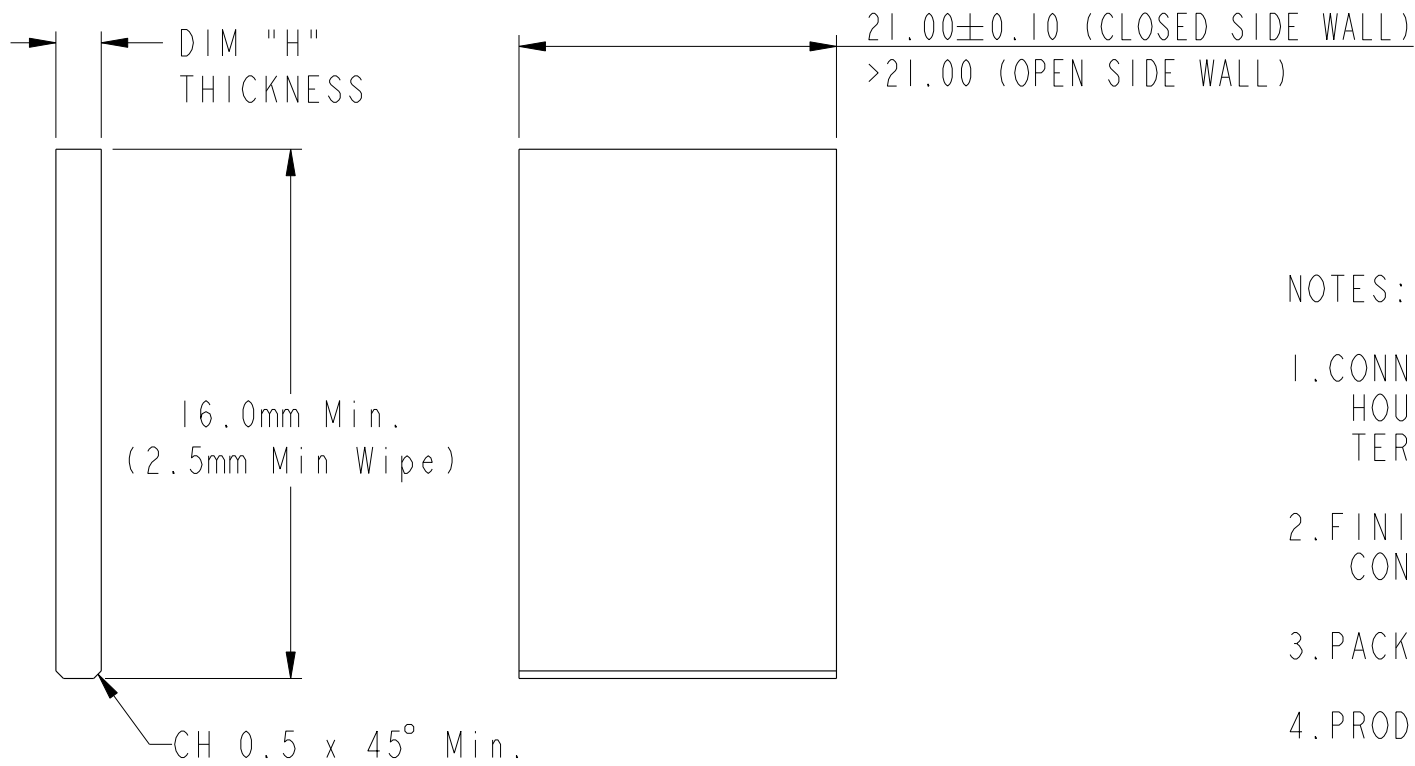

SCALE 2:1
RECOMMENDED MOUNTING BUS-BAR
THICKNESS 5.00 MAX.

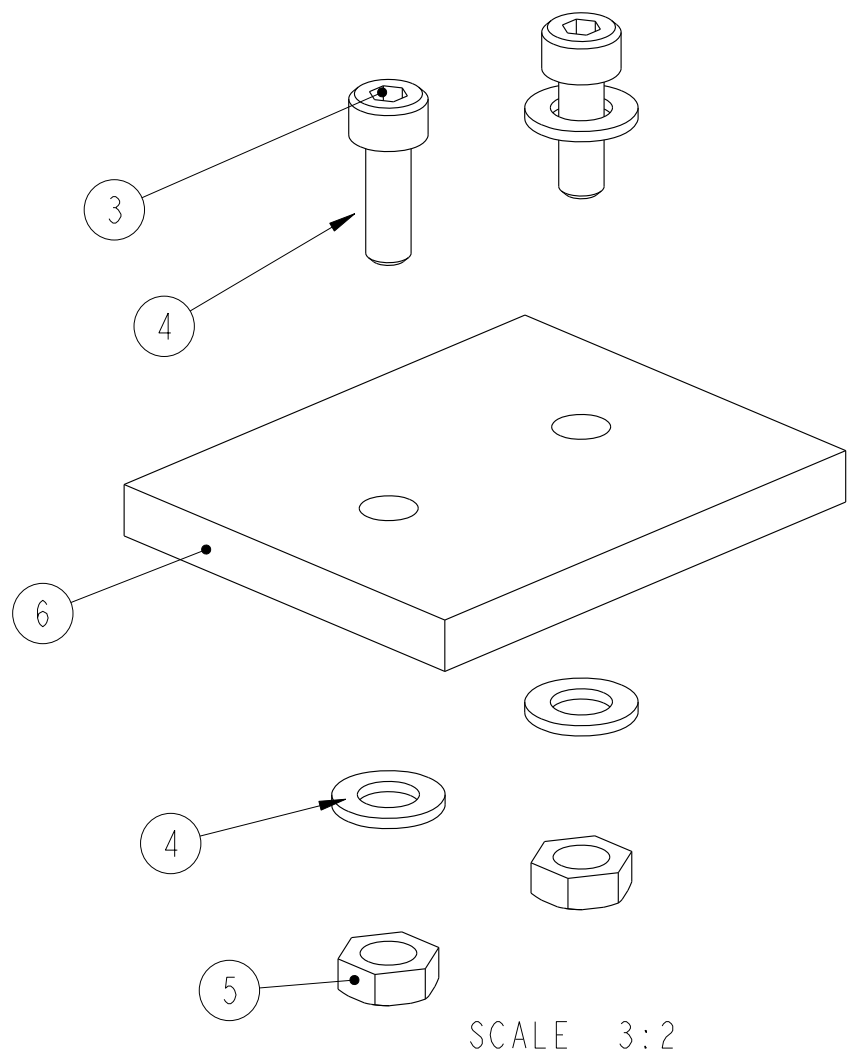


SCALE 2:1
RECOMMENDED MATING BUS-BAR

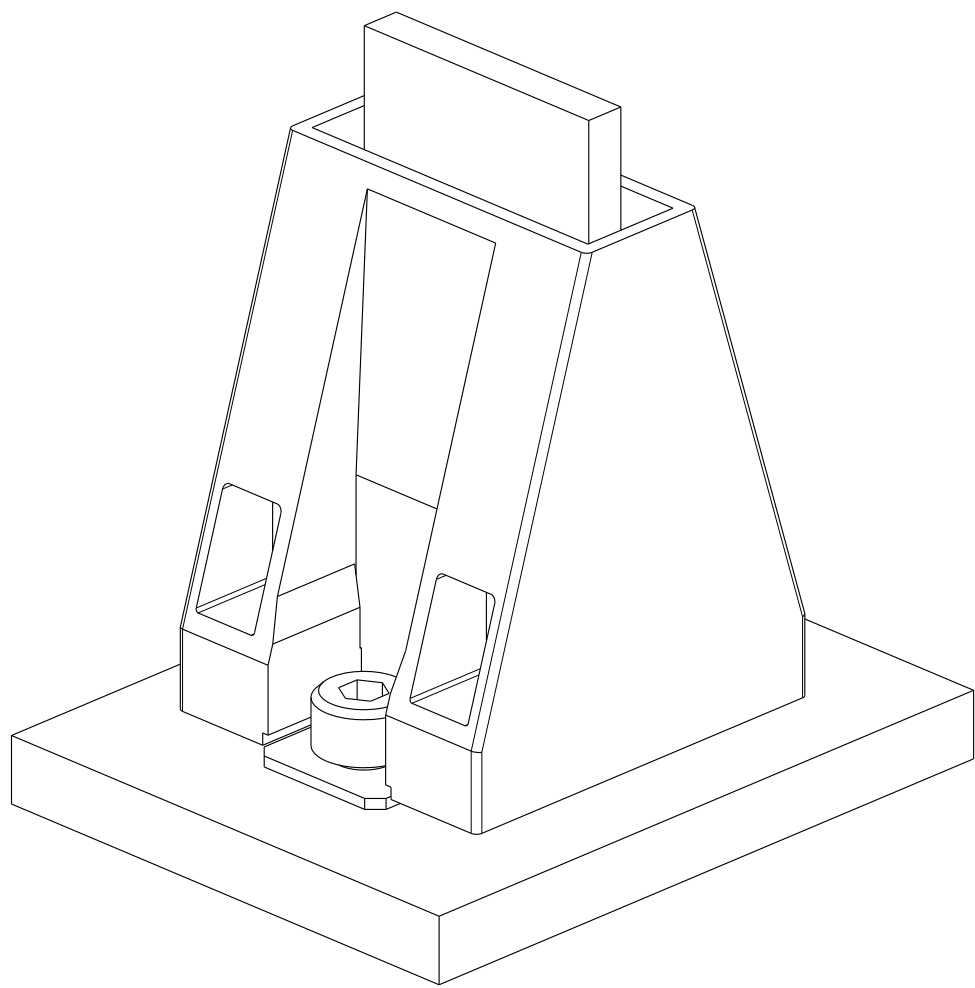

CLOSED SIDE WALL

MATED WITH BUS-BAR VIEW

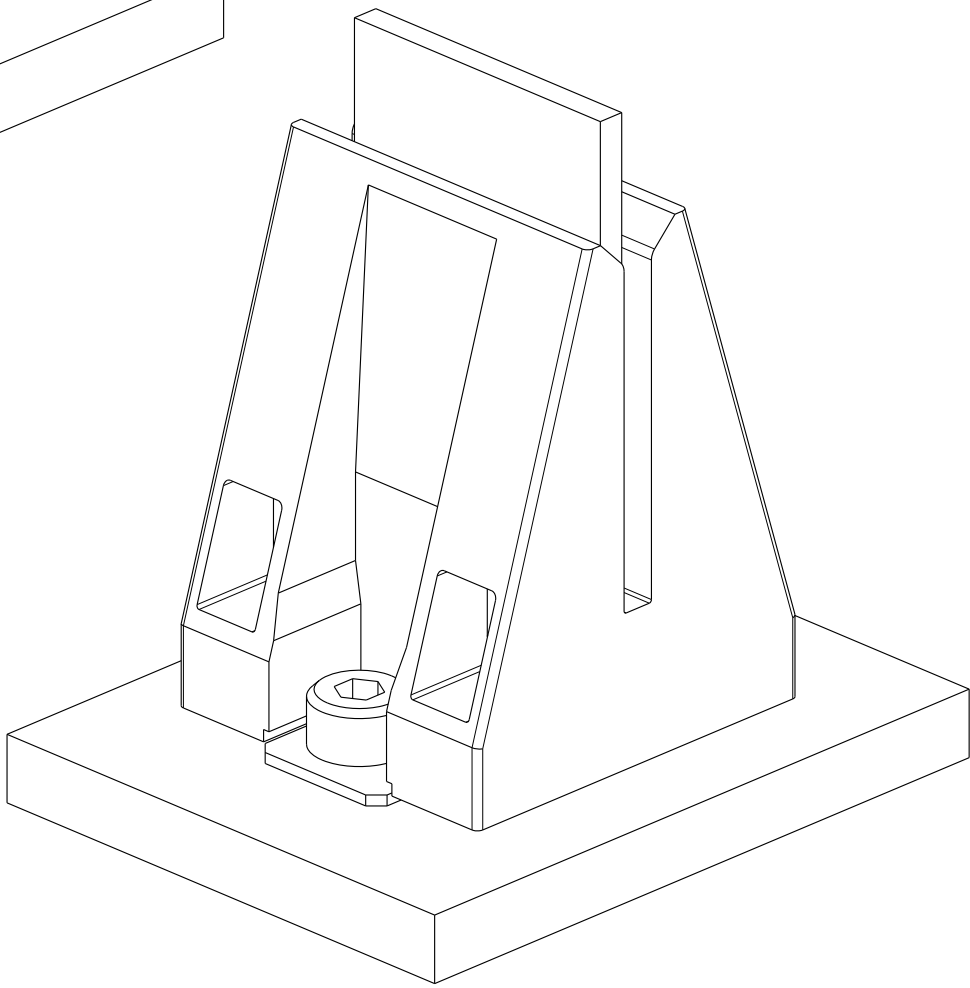

OPEN SIDE WALL

NOTES:

- CONNECTOR MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC GLASS FILLED, Black,UL 94V-0
TERMINALS: COPPER ALLOY
- FINISHES:
CONTACT AREA:PLATED AGT OVER NICKEL I
- PACKING SPECIFICATION: GS-14-2376
- PRODUCT SPECIFICATION: GS-12-1319
- PRODUCT APPLICATION: GS-20-0446
- LEAD FREE PRODUCTS MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004.

spec ref	-	dr	Terris Liu	2015/12/08	projection	mm	size	A2	scale	2:1
tolerance std	-	eng	Terris Liu	2016/07/22			ecn no	-		
ASME Y14.5M	TOLERANCES UNLESS OTHERWISE SPECIFIED	chr	-	-			rel level	Preliminary		
		appr	-	-	product family	-				
surface	linear	0.X	±0.50		Amphenol FCI	BarKlip VERTICAL ASSEMBLY	dwg no	10134620	rev	1
ASME Y14.5M	angular	0°	±2°		www.fci.com	CLOSED SLOT TYPE				
					cat. no.	-	Product - Customer Drw	sheet 2 of 2		