

PS 1061 Test Probe, Ø 2 mm, 10 A



### Description

- Test Probe
- diameter 2.0 mm

### Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [CAD-Drawings](#), [Accessories](#), [Detailed request for product](#)

### Technical Data

Diameter	2 mm
Rated Current	10 A
Allowable Operation Temp.	-25 °C to 70 °C


Resistance to Soldering Heat	260 °C / 5 sec acc. to IEC 60068-2-20, Test Tb, method 1A
------------------------------	---

Weight	0.5 g
--------	-------

Material: Housing	Thermoplastic (PC), UL 94V-2
-------------------	------------------------------

Surface of contacts	gold plated, Thickness 1.0 µm
---------------------	-------------------------------

### Dimensions

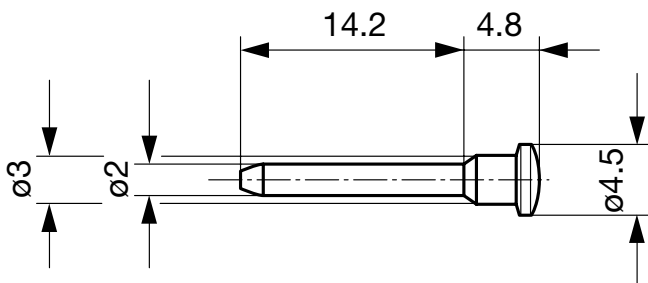

### Variants

Product group	Color	Order Number
Test Probe	red	0040.1062

### Mating Outlets/Connectors

Category / Description



[Test Jacks & Probes Overview complete](#)

PB 1011 Test Jack, PCB Mounting, Ø 2 mm, 10 A [PB 1011](#)

PB 1021 Test Jack, PCB Mounting, Ø 2 mm, 6.3 A [PB 1021](#)

PB 1101 Test Jack, PCB Mounting, Ø 2 mm, 10 A [PB 1101](#)

PB 1111 Test Jack, PCB Mounting, Ø 2 mm, 10 A [PB 1111](#)

PB 1151 Test Jack, PCB Mounting, Ø 2 mm, 6.3 A [PB 1151](#)

[Test Jacks & Probes further types to PS 1061](#)

...