
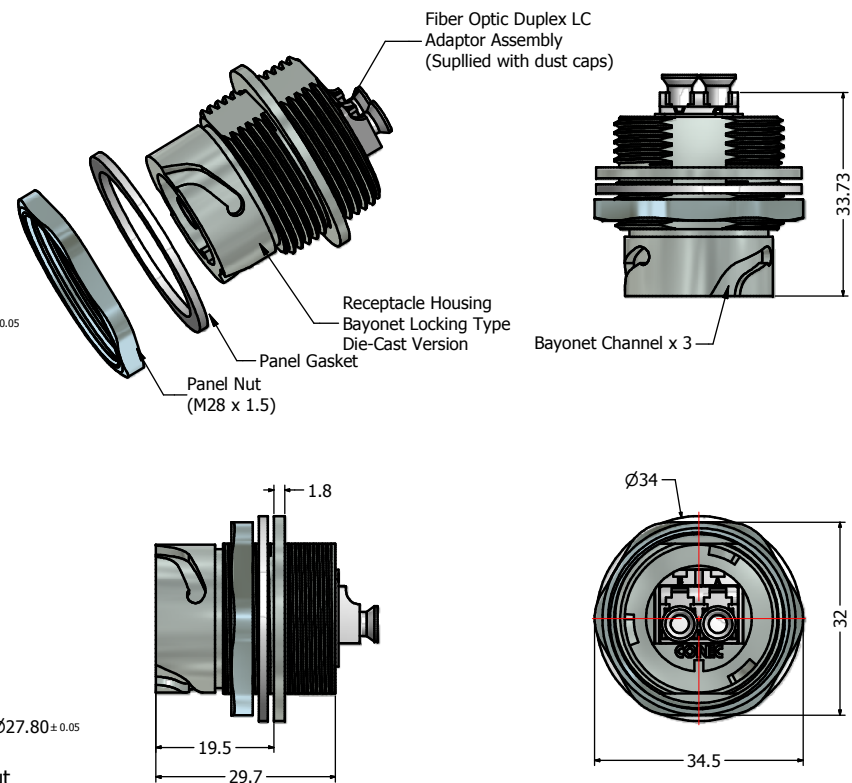
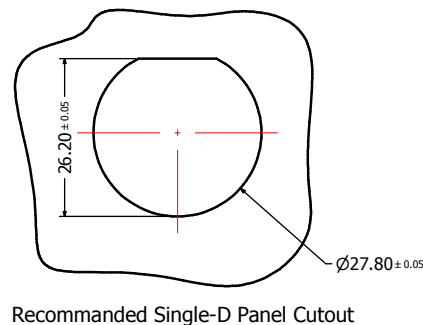
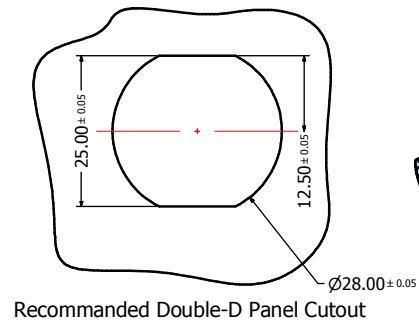


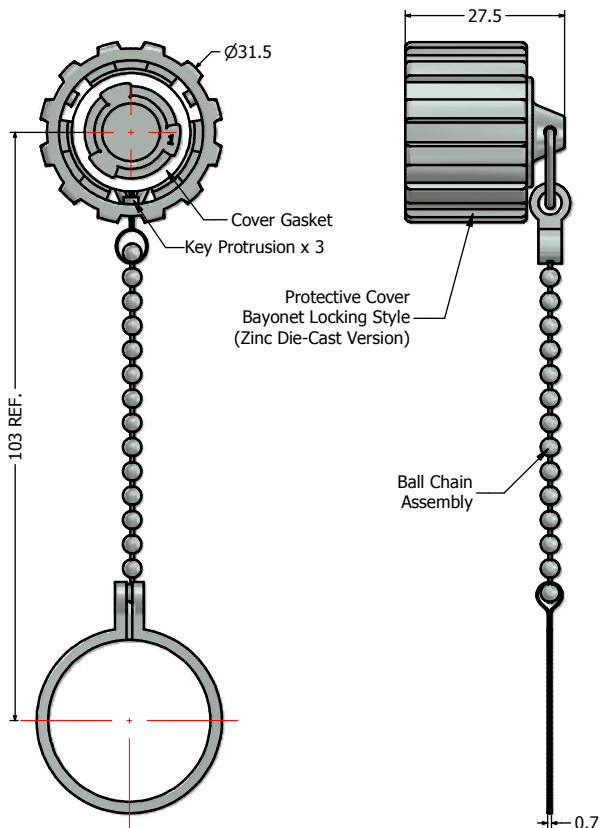

Notes:

- Material and Finish:
 - Receptacle Housing & Protective Cover: Zinc Die-Cast, Nickel Plated
 - Ball Chain Assembly: Copper Alloy and Stainless Steel, Nickel Plated
 - Panel Nut: Brass, Finish: Nickel Plated
 - Panel Gasket: Silicon, Color: White
 - Duplex LC Adaptor Assembly:
 - Housing: Mod. PPO, UL94 V-0, Color: SM Blue/MM Beige/APC SM Green
 - Alignment Sleeves: SM Ceramic/MM Phosphor Bronze
 - Dust Cap: PP, Color: Neutral transparent
 - Operating Temperature: -40°C to +85°C
- Connector can be front or rear mounted to a maximum panel thickness of 3.2mm.
- IP67 rated when covered or fully mated with the appropriate mating connector

Directive 2002/95/EC RoHS Compliant

Description	Part Number
Nickel Plated Die-Cast Duplex LC Single Mode Receptacle + Cover Assembly	17-300380
Nickel Plated Die-Cast Duplex LC Multi Mode Receptacle Cover Assembly	17-300390
Nickel Plated Die-cast Duplex LC APC Single Mode Receptacle Cover Assembly	17-300400

THIS DRAWING MAY NOT BE REPRODUCED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION OF CONEC CORPORATION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION. DO NOT ALTER CAD DRAWING BY HAND	Customer:			Tolerance Unless otherwise specified 0 PLC ± 0.30 1 PLC ± 0.20 2 PLC ± 0.10 3 PLC ± 0.05 ANGLES ± 1°				Scale:		Dim. in mm	
	Name		Title	Approval Date		Autodesk Inventor		Material: See Notes			
					2011	Date	Name	Title: IP67 Industrial Duplex LC Receptacle + Cover Assembly Kit Nickel Plated Die-Cast Version			
					Draw.	Nov. 09	Vincent Ke				
					Appd.	Nov. 09	J. Chaudry				
					Norm						
						D-old			Drawing No.: 17K1A302		DIN A3
	a	original						Part No.: SEE PART NUMBER TABLE		Sheet 1/1	
	Rev.	Changes	Date	Name							