
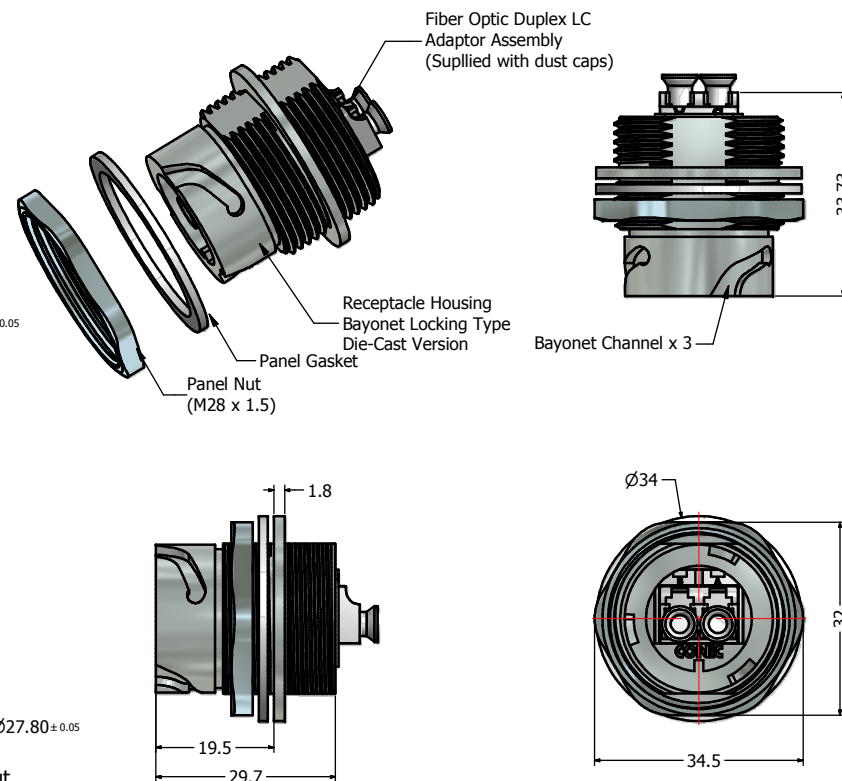
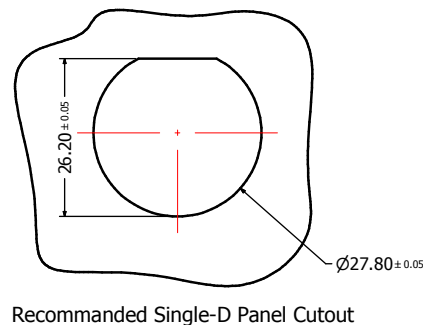
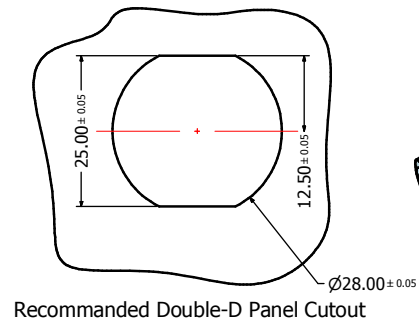


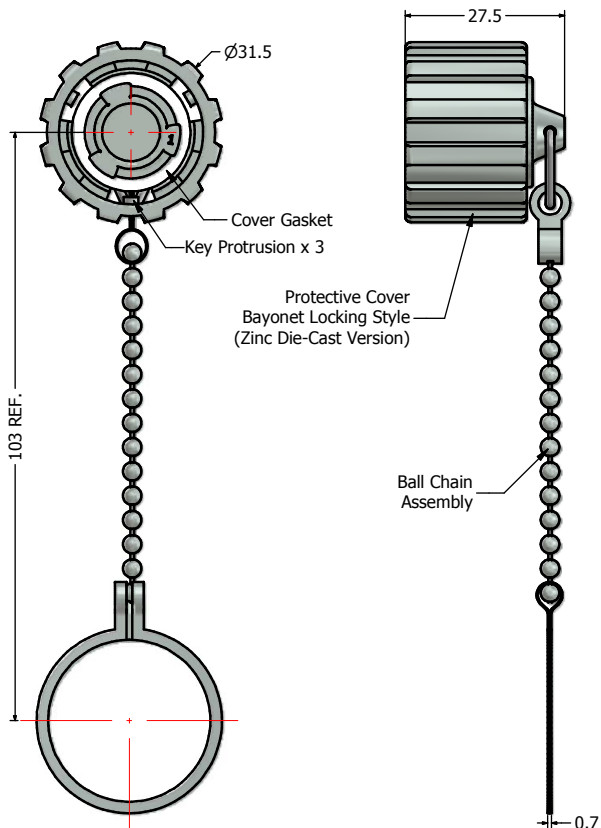

Notes:

- Material and Finish:
 - Receptacle Housing & Protective Cover: Zinc Die-Cast, Nickel Plated
 - Ball Chain Assembly: Copper Alloy and Stainless Steel, Nickel Plated
 - Panel Nut: Brass, Finish: Nickel Plated
 - Panel Gasket: Silicon, Color: White
 - Duplex LC Adaptor Assembly:
 - Housing: Mod. PPO, UL94 V-0, Color: SM Blue/MM Beige/APC SM Green
 - Alignment Sleeves: SM Ceramic/MM Phosphor Bronze
 - Dust Cap: PP, Color: Neutral transparent
 - Operating Temperature: -40°C to +85°C
- Connector can be front or rear mounted to a maximum panel thickness of 3.2mm.
- IP67 rated when covered or fully mated with the appropriate mating connector

Directive 2002/95/EC RoHS Compliant

Description	Part Number
Nickel Plated Die-Cast Duplex LC Single Mode Receptacle + Cover Assembly	17-300380
Nickel Plated Die-Cast Duplex LC Multi Mode Receptacle Cover Assembly	17-300390
Nickel Plated Die-cast Duplex LC APC Single Mode Receptacle Cover Assembly	17-300400

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION. DO NOT ALTER CAD DRAWING BY HAND	Customer:			Tolerance Unless otherwise specified 0 PLC ±0.30 1 PLC ±0.20 2 PLC ±0.10 3 PLC ±0.05 ANGLES ±1°		Scale:	Dim. in mm	
	Name	Title	Approval Date			Material: See Notes		
						Title: IP67 Industrial Duplex LC Receptacle + Cover Assembly Kit Nickel Plated Die-Cast Version		
						Drawing No.: 17K1A302		
	a	original				Part No.: SEE PART NUMBER TABLE		
	Rev.	Changes	Date			Name	DIN A3 Sheet 1/1	
				2011	Date	Name		
				Draw.	Nov. 09	Vincent Ke		
			Appd.	Nov. 09	J. Chaudry			
			Norm					
			D-old					