
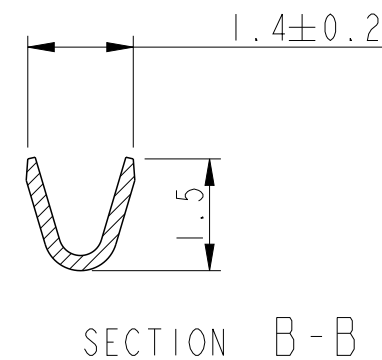
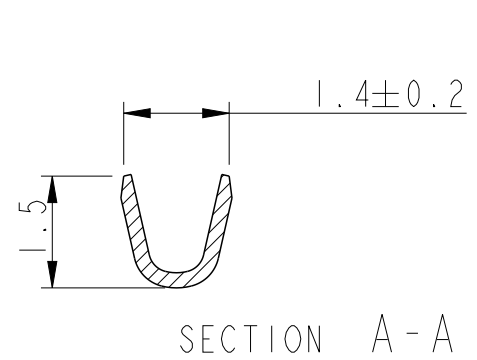
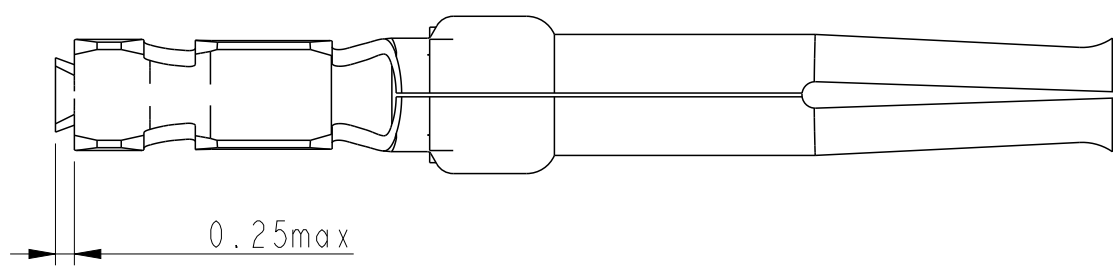



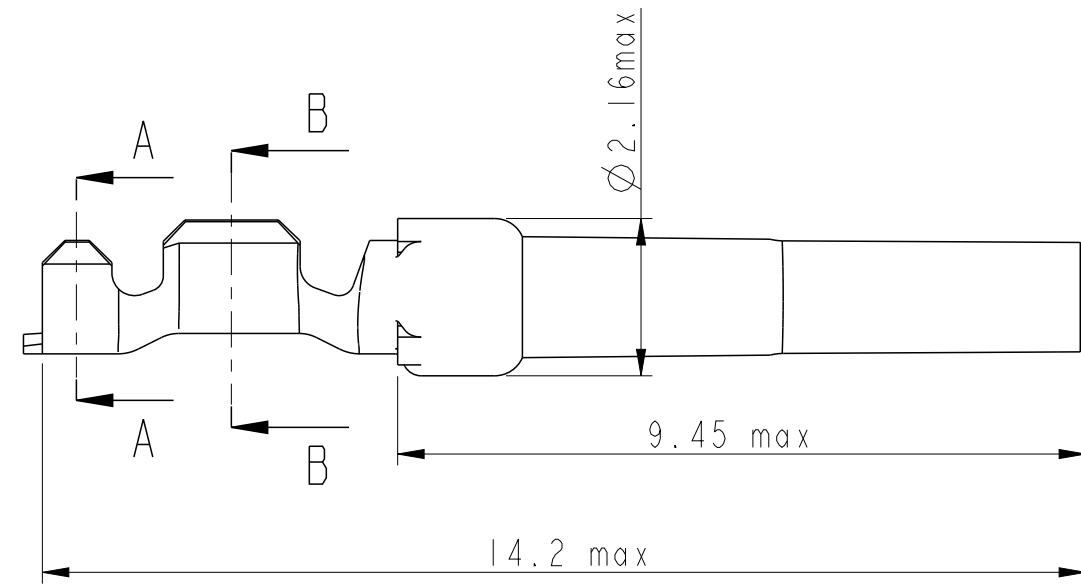

- NOTES:
- 1-Material:phosphor bronze,thickness 0.20
 - 2-Finish on contact area:see table
finish on termination:bright tin over nickel
 - 3-Wire range:24 to 28 AWG
 - 4-Max outer dia of wire insulator:1.02 mm
 - 5-Current carrying capacity per contact:
 - 3.Amps max when crimped to #24 AWG
 - 2 Amps max when crimped to #26 AWG
 - 1 Amps max when crimped to #28 AWG
 - 6-After 5 insertions into connector, contact retention must be 5 pounds axial load min
 - 7-When contact is crimped to 24 AWG,the insulation support crimped height must be 1.78 mm max to ensure a proper insertion into housing
 - 8-Reel should be continous without any contacts missing in between
 - 9-Packaging:Reel of 400 contacts

NOTE : ROHS INFORMATIONS
The LF products meet European union directives and other country regulations as described in GS-22-008
Terminations plating spec : 2um Nickel min + 2um Sn min
Packaging Spec : see GS-14-920

PART NUMBER	PLATING
86563004065LF	0.76μ Au /GXT
86563004065	0.76μ Au/ GXT
86563004064LF	Flash Au
86563004064	Flash Au

rev	ecn no	dr	date
D	LS06-196	MPE	27/11/2006
E	LS08-0127	MPE	13/05/2008
F	LS08-0167	MPE	2008/08/05
G	109-0152	AMR	2009-07-27
H	110-0070	AMR	2010-03-09
J	111-0003	AMR	2011-01-06
-	-	-	-

www.fciconnect.com		surface - ☒ ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	C JARRY	28/01/97	ANGULAR	size A3	Scale 10:1
Eng			LINEAR		
Chr			0° ±2°	0.X ±0.3	0.XX ±0.1
Appr				0.XXX ±0.05	ECN 111-0003
Product family				-	Spec ref
FCI CRIMP SOCKET			dwg no	C01-8656-0426	Rev. J
#Wire 24-28 Ø1.02 max					
catalog no			-	customer	sheet 1 of 1