
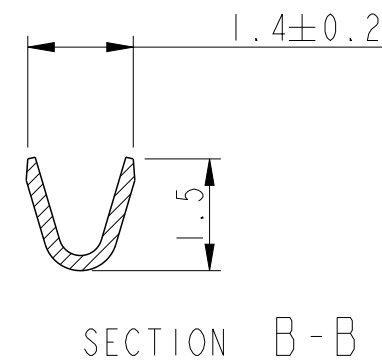
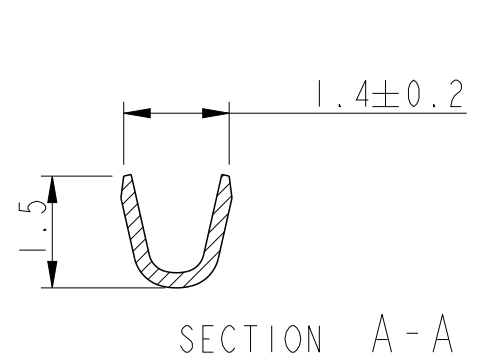
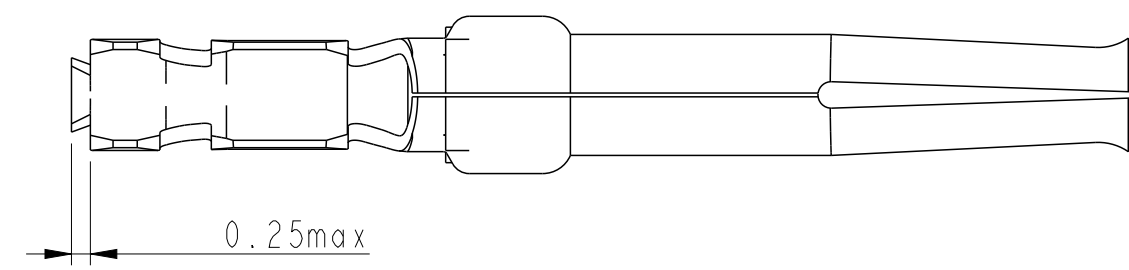



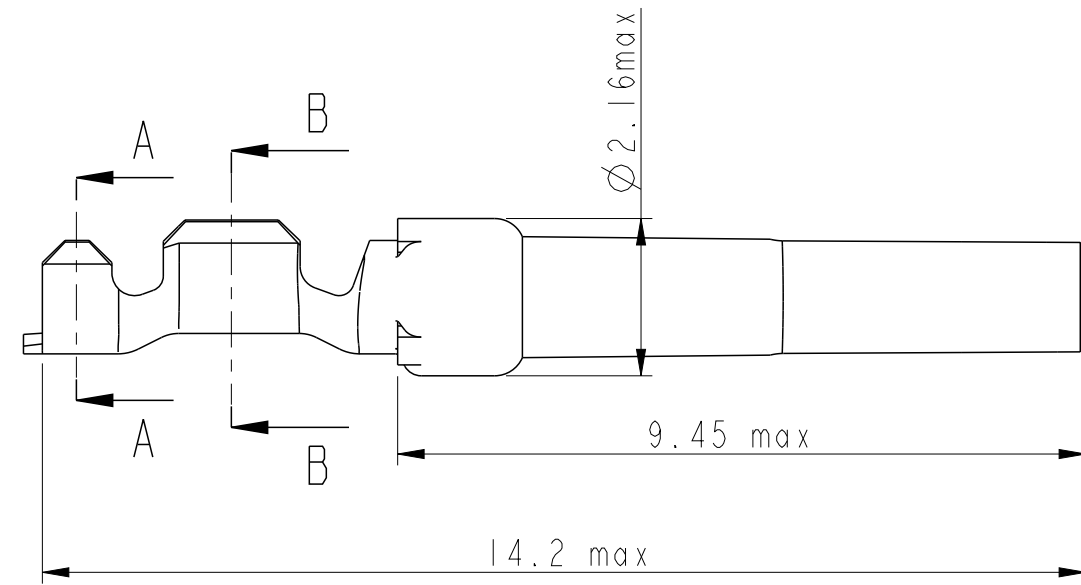


- NOTES:
- 1-Material:phosphor bronze,thickness 0.20
 - 2-Finish on contact area:see table
finish on termination:bright tin over nickel
 - 3-Wire range:24 to 28 AWG
 - 4-Max outer dia of wire insulator:1.02 mm
 - 5-Current carrying capacity per contact:
 - 3.Amps max when crimped to #24 AWG
 - 2 Amps max when crimped to #26 AWG
 - 1 Amps max when crimped to #28 AWG
 - 6-After 5 insertions into connector, contact retention must be 5 pounds axial load min
 - 7-When contact is crimped to 24 AWG,the insulation support crimped height must be 1.78 mm max to ensure a proper insertion into housing
 - 8-Reel should be continous without any contacts missing in between
 - 9-Packaging:Reel of 400 contacts

NOTE : ROHS INFORMATIONS
The LF products meet European union directives and other country regulations as described in GS-22-008
Terminations plating spec : 2um Nickel min + 2um Sn min
Packaging Spec : see GS-14-920

PART NUMBER	PLATING
86563004065LF	0.76μ Au /GXT
86563004065	0.76μ Au/ GXT
86563004064LF	Flash Au
86563004064	Flash Au

rev	ecn no	dr	date
D	LS06-196	MPE	27/11/2006
E	LS08-0127	MPE	13/05/2008
F	LS08-0167	MPE	2008/08/05
G	109-0152	AMR	2009-07-27
H	110-0070	AMR	2010-03-09
J	111-0003	AMR	2011-01-06
-	-	-	-

www.fciconnect.com			surface - 		tolerance std		projection 		
			ISO 1302		ISO 406	ISO 1101			
TOLERANCES UNLESS OTHERWISE SPECIFIED									
Dr	C JARRY	28/01/97	ANGULAR		LINEAR	0.X	±0.3	size A3	Scale 10:1
Eng						0.XX	±0.1		
Chr			0°	±2°		0.XXX	±0.05		
Appr			Product family -				ECN 111-0003		
							Spec ref		
		title	CRIMP SOCKET				dwg no	C01-8656-0426	Rev. J
			#Wire 24-28 Ø1.02 max						
			catalog no -						
			customer				sheet 1 of 1		