



TRG70E SERIES

70W SWITCHING ADAPTER



Features

- * 70W Single Output
- * Universal Input Range 90~264VAC
- * 2 pole AC Inlet IEC320-C8
- * Class II Insulation
- * Continuous Short Circuit Protection
- * Meets EN55022 Class B and CISPR/FCC Class B, Conducted
- * Meet CEC & ErP Level V
(Output Cable Length \leq 1800mm)
(TRG70E120: Output Cable Length \leq 720mm 16AWG)
(TRG70E150: Output Cable Length \leq 1220mm 16AWG)

Ordering information

TRG70EXXX- XX	X	XX
Model No.	DC Plug Type	DC Cable Length and Type
	OVP E: With OVP	01: 720mm 02: 1220mm 03: 1800mm 11: 720mm with Ferrite Core 12: 1220mm with Ferrite Core 13: 1800mm with Ferrite Core *18AWG/UL1185



MODEL	OUTPUT VOLTAGE	OUTPUT CURRENT	RIPPLE & NOISE NOTE 2	VOLTAGE ACCURACY NOTE 1	LINE REGULATION NOTE 3	LOAD REGULATION NOTE 4	%EFF. (Typ.) NOTE 5
TRG70E120	12V	5.5A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 5\%$	86%
TRG70E150	15V	4.6A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 3\%$	88%
TRG70E180	18V	3.9A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	87%
TRG70E190	19V	3.7A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	88%
TRG70E240	24V	3.0A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TRG70E480	48V	1.5A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	90%

Specifications

INPUT SPECIFICATIONS:

Voltage 90~264Vac
 Frequency 47 to 63Hz
 Inrush Current Cold Start @25°C 80A max. @240Vac
 Conducted EMI CISPR/FCC Class B
 Leakage Current 0.25mA max.

OUTPUT SPECIFICATIONS:

Holdup Time 8ms typ. @115Vac
 Short Circuit Protection Continuous
 Over Voltage Protection Yes
 Temperature Coefficient ±0.05%/°C

GENERAL SPECIFICATIONS:

Isolation Input to output = 4,242VDC
 Operating Temperature 0 ~ 70°C (see derating curve)
 Storage Temperature -20~85°C
 Humidity 93% RH max. Non condensing
 Cooling Natural Convection
 Switching Frequency 60KHz Typical
 MTBF MIL-HDBK-217F, GB, at 25°C/115VAC 200K hrs min.
 Altitude 2000m
 Dimensions 5.197x2.283x1.201 inches (132.00x58.00x30.50 mm)
 Weight 345g(0.76 Pounds)
 AC Inlet IEC320/C8


SAFETY AND EMC:

Emission and Immunity EN55022 Class B, FCC Part 15 Class B
 EN61000-6-3, EN61000-3-2, EN61000-3-3
 EN55024, EN61204-3, EN61000-6-1
 Safety IEC60950-1, EN60950-1, UL60950-1

Mechanical Specification


All Dimensions are in inches(mm)
 Tolerance: Inches: X.XXX±0.02
 Millimeters: X.XX±0.5

TRG70E Series Derating Curve

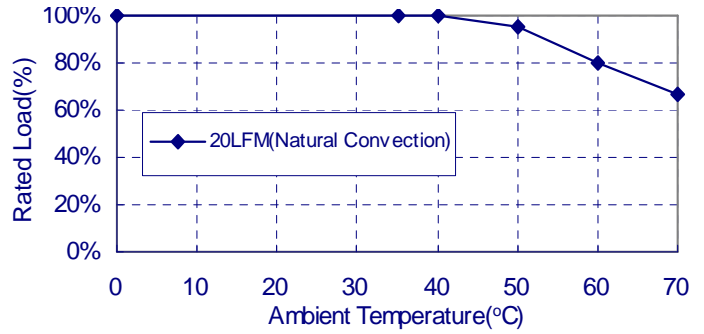

NOTE:

1. Voltage accuracy at 60% full load
2. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for Ripple & Noise measurement @20MHz BW.
3. Line regulation measured from 100Vac to 240Vac, full load.
4. Load regulation measured from 60% to 100% full load and from 60% to 20% full load (60% +/- 40% full load).
5. Typical efficiency at 230VAC and full load at 25°C.

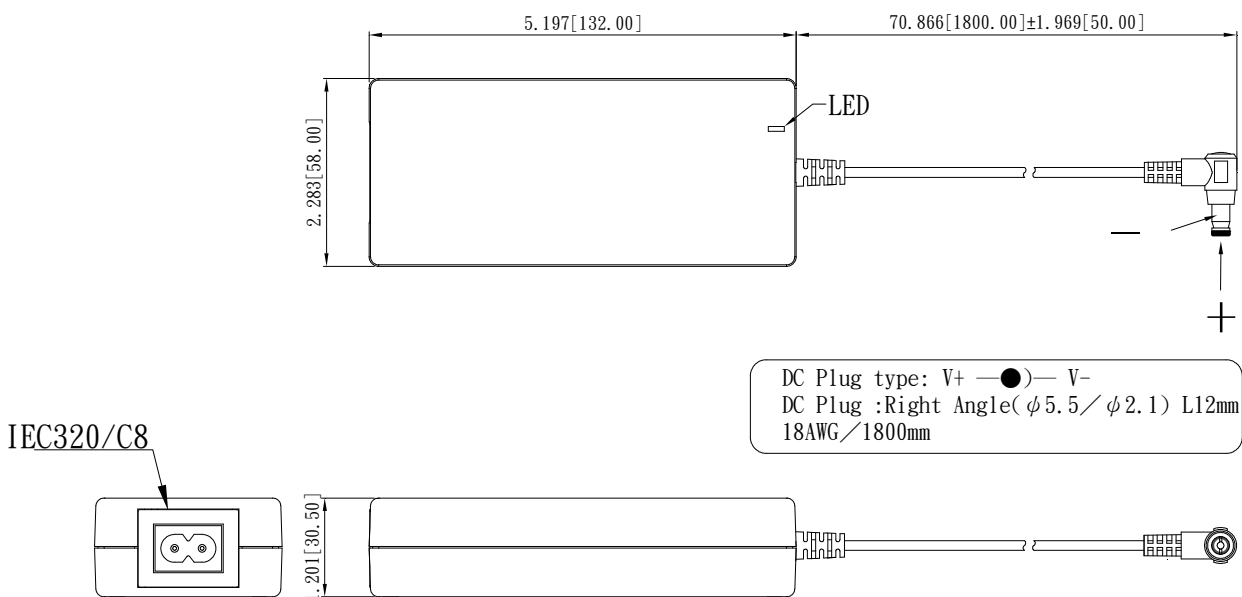

Typical at 25°C, nominal line and 75% load, unless otherwise Specified