
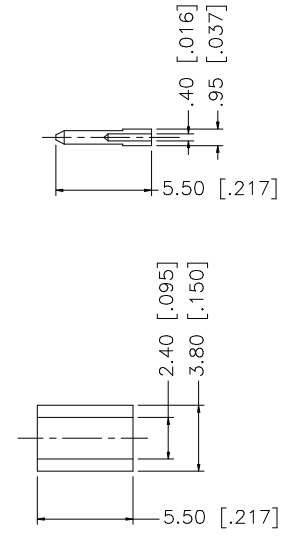
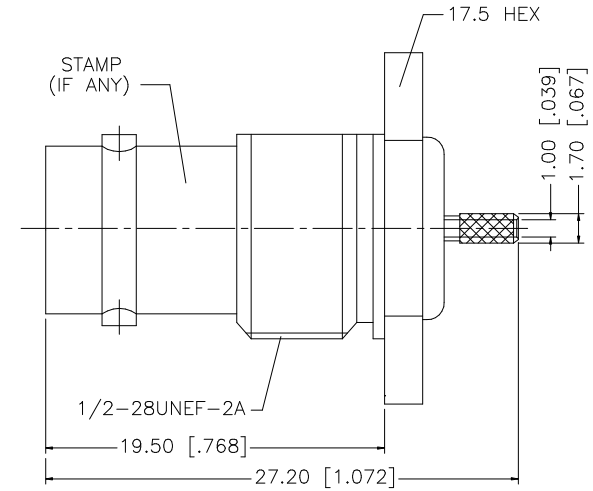


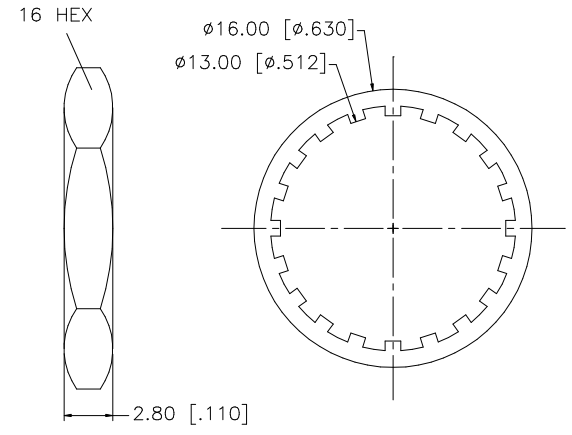


REV.	DATE	DESCRIPTION
A	09/07/04	UPDATE DRAWING FORMAT
B	10/02/06	REVISE CABLE DESCRIPTION TO RG-178/U AND 196/U

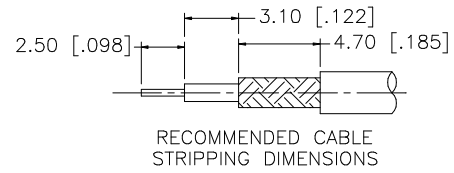

8	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex						
7	HEX NUT	BRASS	NICKEL	1		DRAWN	G.R.S.						10/02/06	
6	LOCK WASHER	BRASS	NICKEL	1		CHECKED			PART DESCRIPTION BNC BULKHEAD CRIMP JACK (FOR RG–178/U, 196/U CABLE)					
5	GASKET	RUBBER	RED	1		ISSUED								
4	CONTACT PIN	BRASS	GOLD	1		SHEET	1 OF 1		PART NO. 112522					
3	CONTACT PIN	PHOS. BRONZE	GOLD	1										
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO. 112522.DWG REV. B SIZE A SCALE NA					
1	BODY/HOUSING	BRASS	NICKEL	1										
DESCRIPTION MATERIAL FINISH QTY						CAD FILE C:/112/112522.DWG								