

## FED. MFG. CODE 91929

1PB544

198544

PAGE 1 OF 1

**M**

DRAWING  
NUMBER

6

## ANSWER

## REVISIONS

**A** PR 8790

D J S  
23 MAY 80

B	CO 53488
---	-------------

WJM  
15 JUL 83

C 201143

CSL  
1 SEP 00

D	201411
---	--------

CSL  
2 OCT 00

E	0018502
---	---------

PM  
27FEB06

--	--

---

--	--

---

---

---

---

---

---

[illegible]

100

--	--

1

R	z
---	---

TELEPHONE  
IA  
RAW

AS-  
-B-  
DE

RA  
6037

5-1

REPLACES

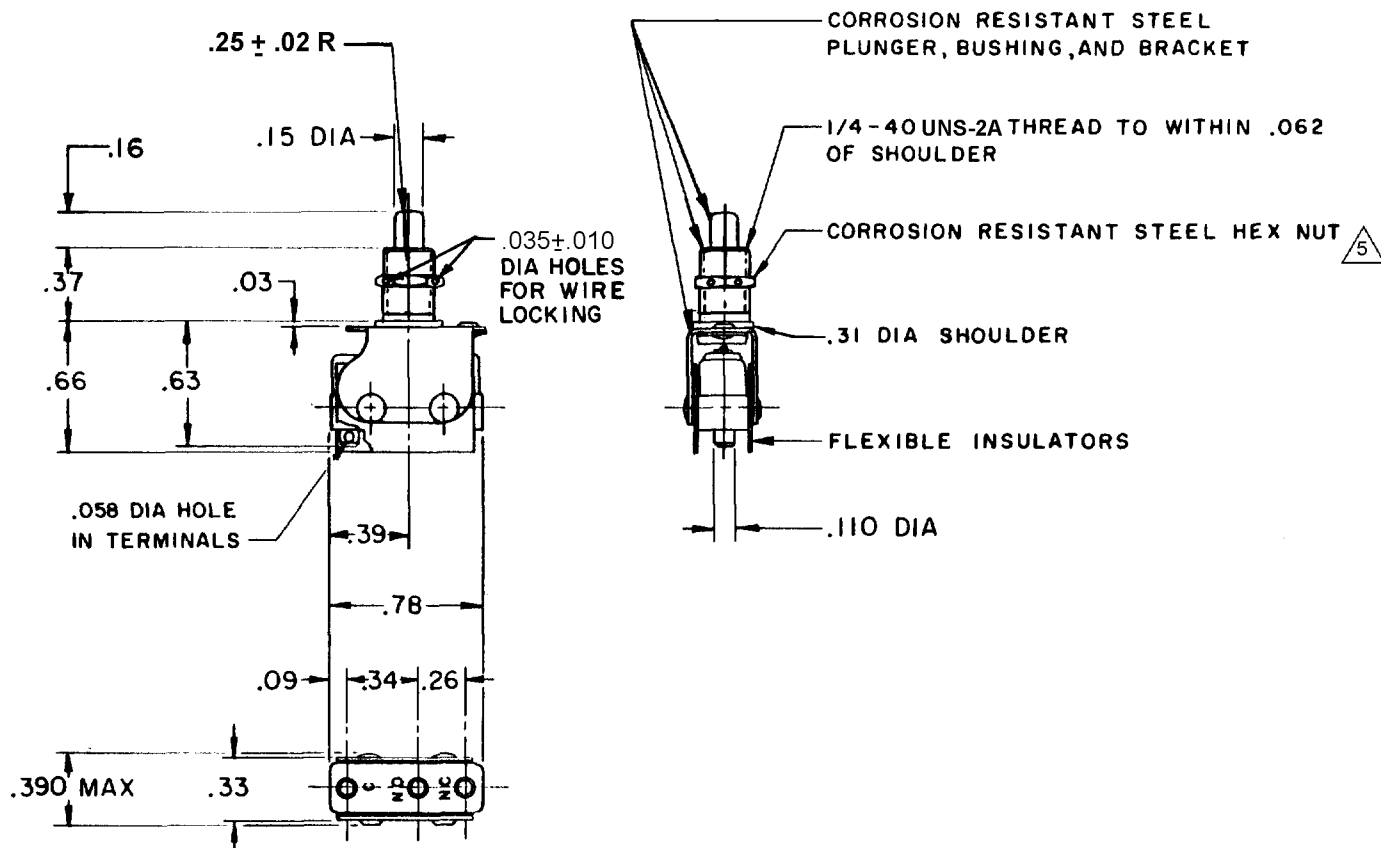
RELEASE NO. PR-8790

**CHECK**

**CHECK**

50CT 70

**DO CHECK**

**MB S | 14 OCT**

1 - UNIT INCLUDES "11SM2446" TYPE BASIC SWITCH  
2 - TERMINALS ARE PLATED FOR SOLDERING  
3 - RECOMMENDED FOR MANUAL OPERATION ONLY  
4 - FOR USE IN TEMPERATURE RANGE -65° F TO +400° F

5 MOUNTING HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 2 LBS MAX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
OVERTRAVEL FORCE ----- 2.5 LBS MAX	30 VOLTS DC RATING  INDUCTIVE -----SEA LEVEL----- 3 AMP  RESISTIVE ----- SEA LEVEL----- 5 AMP	UNLESS OTHERWISE NOTED
RELEASE FORCE ----- 2 OZ MIN		DIMENSIONS ARE IN INCHES
OVERTRAVEL ----- .100 MIN		<b>TOLERANCES ARE:</b>
DIFFERENTIAL TRAVEL ----- .031 MAX		ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
		WEIGHT