


REV.	DATE	DESCRIPTION
B	01/29/00	MODIFY FERRULE DIMS./ CHANGE NOTES
C	06/05/03	UPDATE DRAWING FORMAT
D	11/20/06	REVISE BARREL I.D. TO 2.70mm

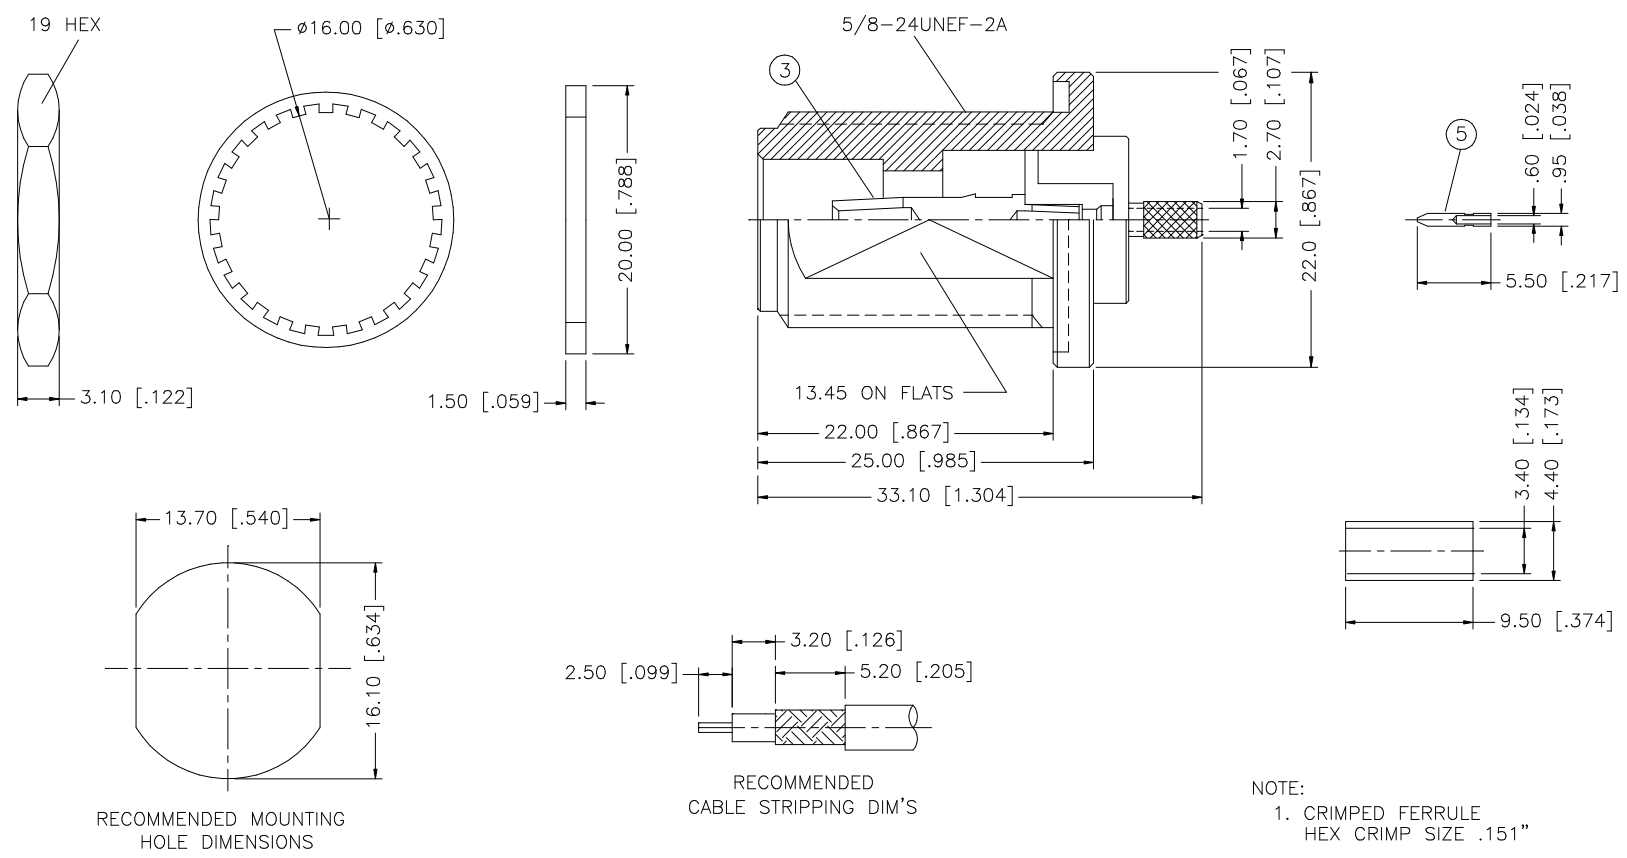

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex N BULKHEAD CRIMP JACK (FOR RG-316/U DOUBLE BRAID CABLE)					
7	FERRULE	COPPER	NEXCOTE	1		DRAWN	G.R.S.						11/20/06
6	HEX NUT	BRASS	NEXCOTE	1		CHECKED							
5	LOCK WASHER	BRASS	NEXCOTE	1		ISSUED			PART NO. 172165				
4	GASKET	SILICONE	RED	1		SHEET	1 OF 1						
3	CONTACT PIN	BRASS	GOLD	1					PART NO. 172165				
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO. 172165.DWG				
1	BODY	BRASS	NEXCOTE	1					REV. D	SIZE A	SCALE NA		
DESCRIPTION		MATERIAL	FINISH	QTY	CAD FILE		C:/172/172165.DWG						