


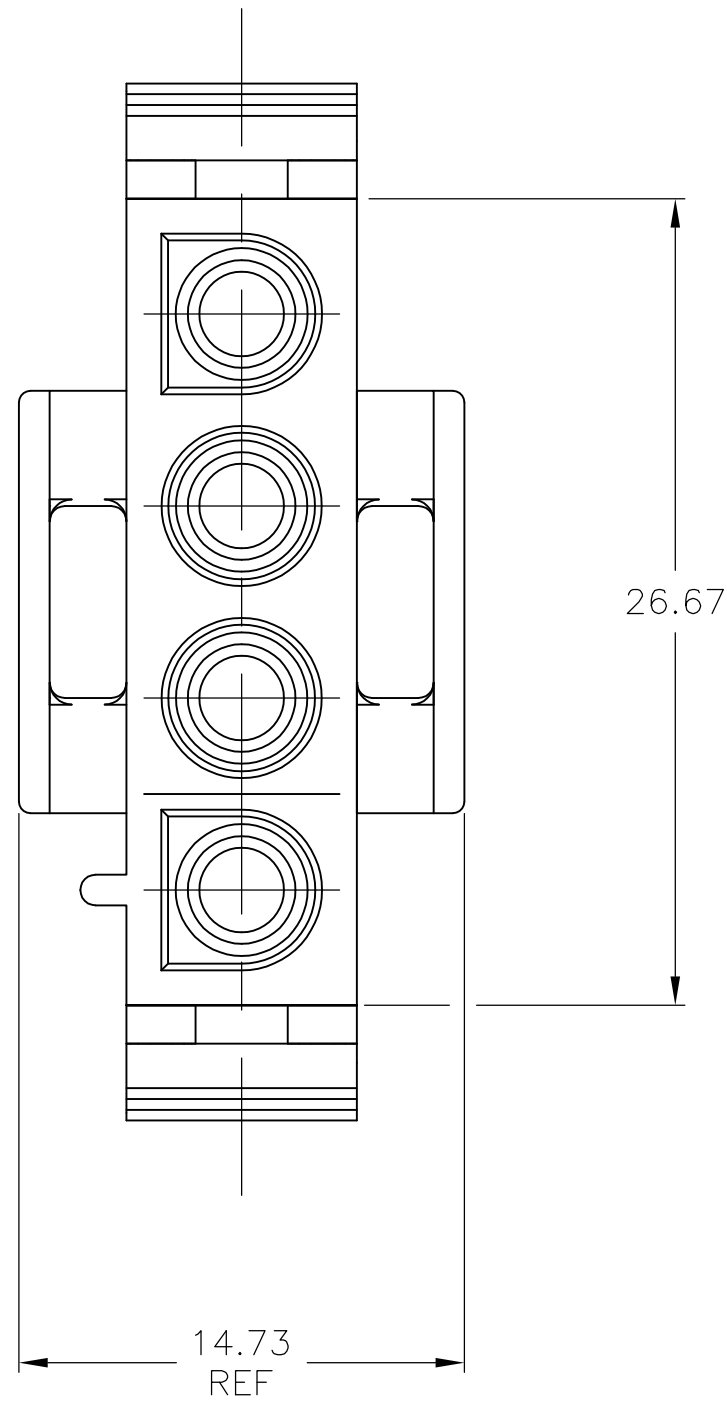
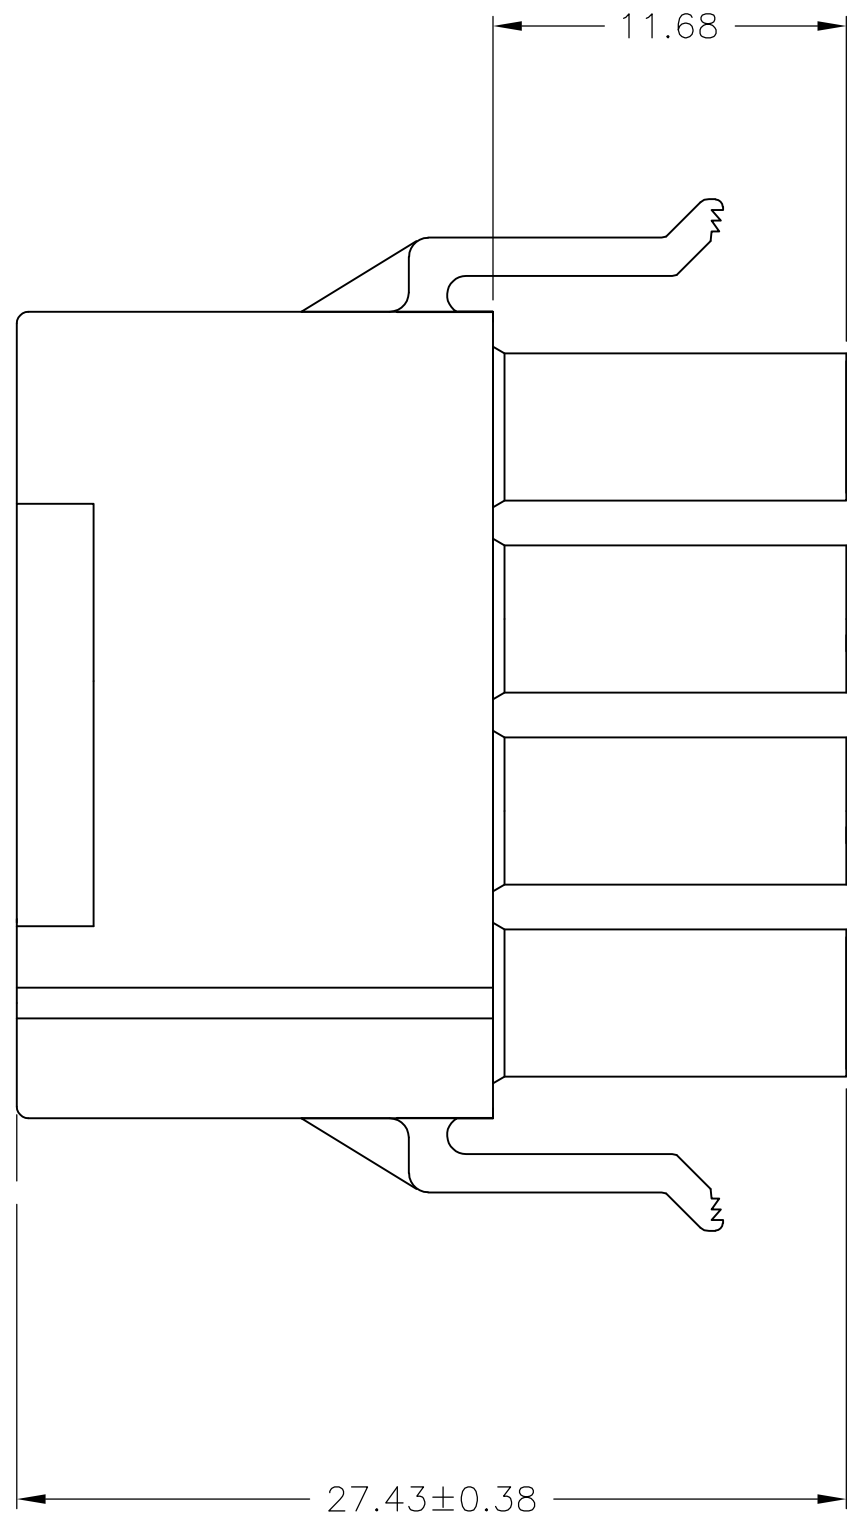


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISED PER ECR-17-015922	07NOV2017	BDA	KR

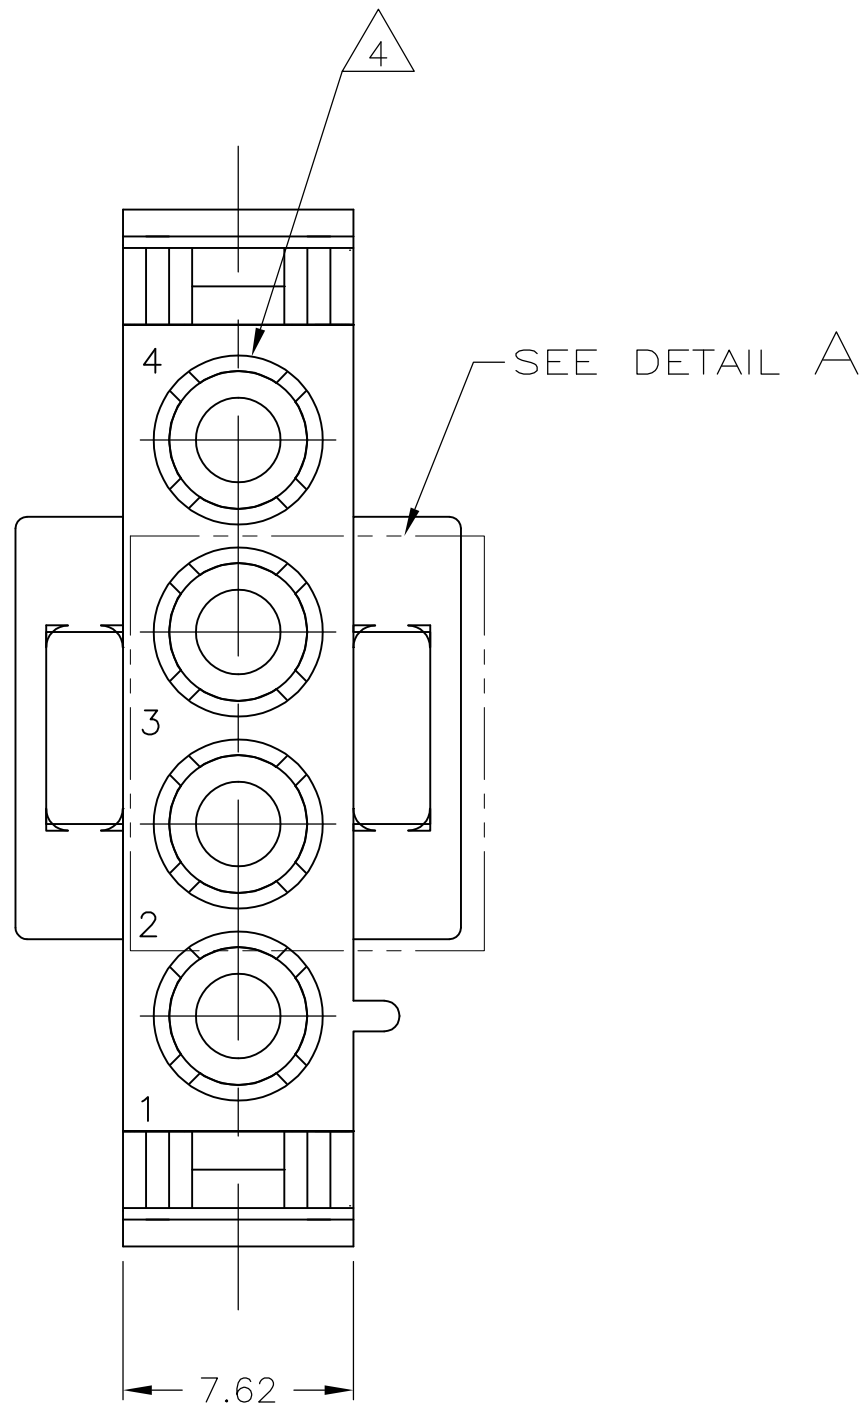

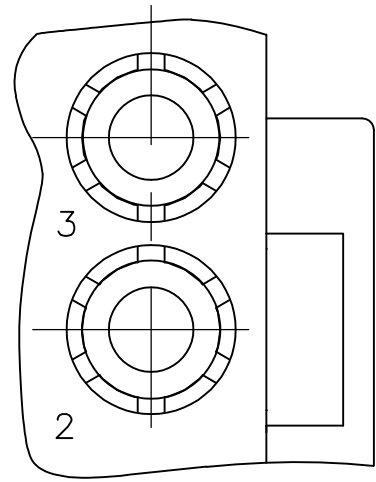

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
 - SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
 - DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- △4 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.

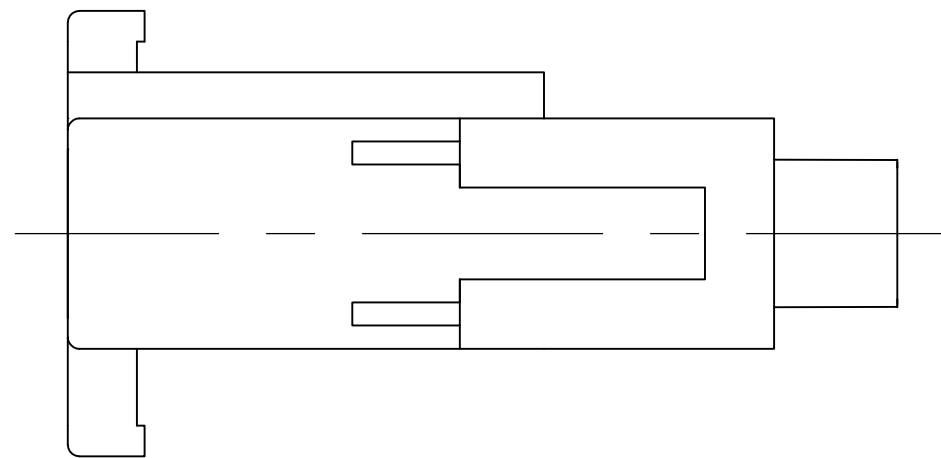

DETAIL A
OPTIONAL CONSTRUCTION

NATURAL	2029387-1
COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN jr_ruth 10AUG11	 TE Connectivity				
		CHK TOM MICHELUTTI 10AUG11					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0. PLC ± - 1. PLC ± - 2. PLC ± 0.20 3. PLC ± - 4. PLC ± - ANGLES ± 0°30'	APVD TOM MICHELUTTI 10AUG11	NAME PLUG, 4 CIRCUIT, UNIVERSAL MATE-N-LOK™ -				
		PRODUCT SPEC					
		APPLICATION SPEC	SIZE A1	CAGE CODE 00779	DRAWING NO 2029387	RESTRICTED TO -	
		WEIGHT					
MATERIAL NYLON,UL 94V-0	FINISH -	CUSTOMER DRAWING		SCALE 4:1	SHEET 1	OF 1	REV A1