

Technical drawing of a cable assembly showing recommended cable stripping dimensions. The drawing includes a side view and a cross-sectional view.

Side View Dimensions:


- Overall length: 34.50 [1,359]
- Flare diameter: $\varnothing 14.50$ [.571]
- Flare length: 8.30 [.327]
- Flare tolerance: ± 0.07 [.003]
- Stripping length: 7.40 [.291]
- Overall diameter: 9.30 [.366]

Cross-sectional View Dimensions:

- Overall length: 4.00 [.158]
- Stripping length: 3.70 [.146]
- Stripping length: 8.30 [.327]

Labels:

- FLARE TO
- 7/16-28UNF-2B
- STAMP IF ANY
- RECOMMENDED CABLE STRIPPING DIMENSIONS

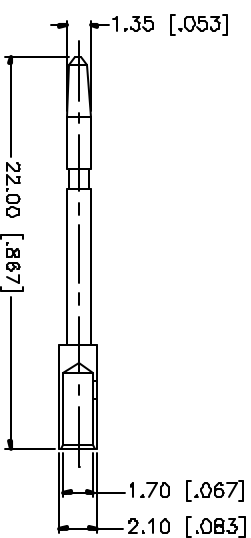


Technical drawing of a 7/16-28 UNEF-2B threaded rod assembly. The drawing shows the rod, a hex nut, and two washers. The dimensions are as follows:

- Rod diameter: $\varnothing 14.50$ [0.571]
- Hex nut width: 8.30 [0.327]
- Washer diameter: 7.40 [0.291]
- Total length: 34.50 [1.359]
- Thread specification: 7/16-28 UNEF-2B
- Label: STAMP IF ANY

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

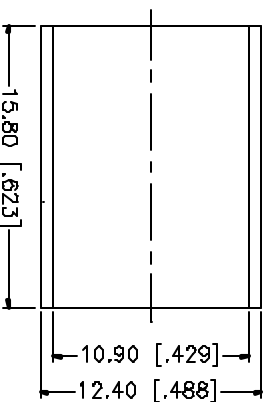[illegible]