


CAP
OPTIONS

ROCKER SWITCHES - SUB-MINIATURE



SCHEMATIC

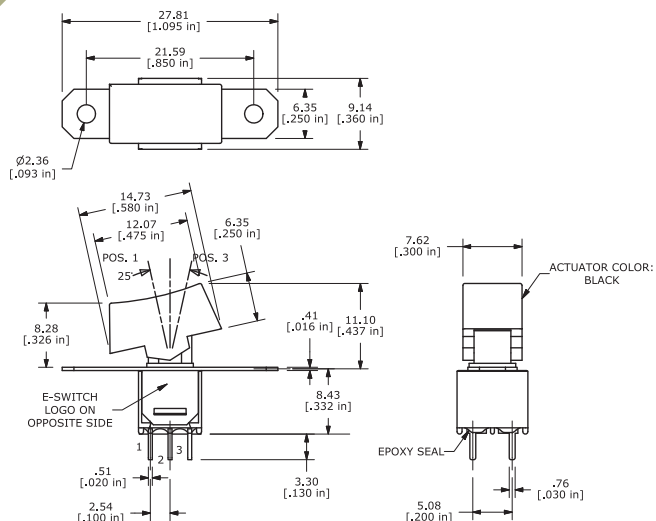

Model No.	POS 1 	POS 2 	POS 3 
MDP-1	ON	NONE	ON
MDP-2	ON	NONE	(ON)
MDP-3	ON	OFF	ON
Term. Comm.	2-3, 5-6	OPEN	2-1, 5-4

() = Momentary

ACTUATOR OPTIONS

Std. all models except SPDT with M6 terminations.

Std. on SPDT models with M6 terminations.

TERMINATION OPTIONS





TACT
SWITCHESNAVIGATION
SWITCHESPUSHBUTTON
SWITCHESTOGGLE
SWITCHESROCKER
SWITCHESSLIDE
SWITCHESSNAP-ACTION
SWITCHESDIP
SWITCHESKEYLOCK
SWITCHESROTARY
SWITCHESDETECTOR
SWITCHESCAP
OPTIONS

SERIES 400 SWITCHES

ROCKER SWITCHES - SUB-MINIATURE

M6






SPDT

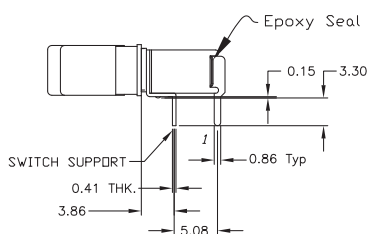

P.C. MOUNTING

M6





DPDT

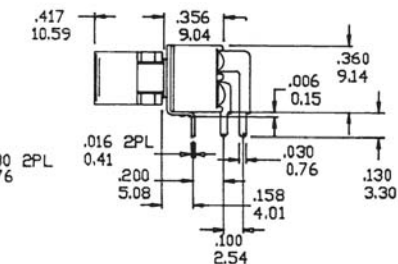

P.C. MOUNTING

M61





SPDT

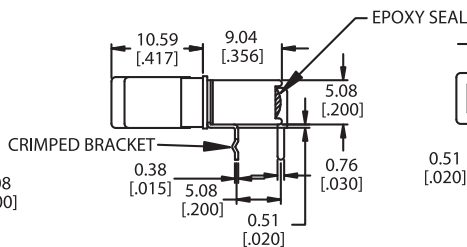

P.C. MOUNTING

M61



DPDT

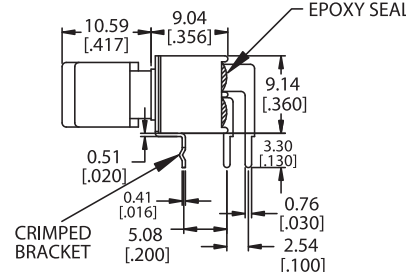



P.C. MOUNTING

**M7**



SPDT

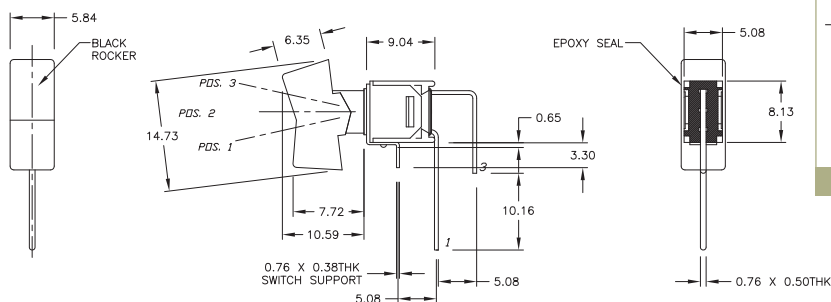**M7**

DPDT

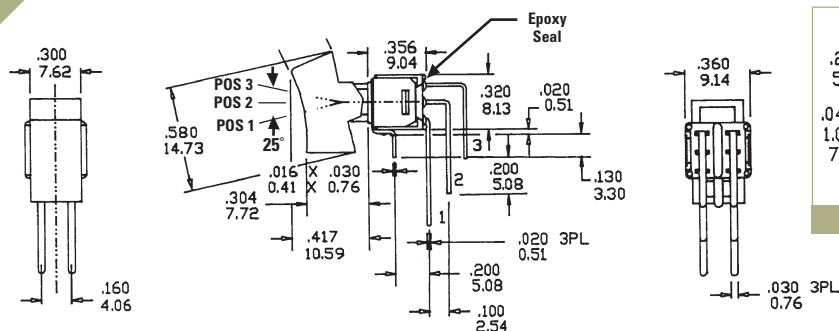**M71**

SPDT

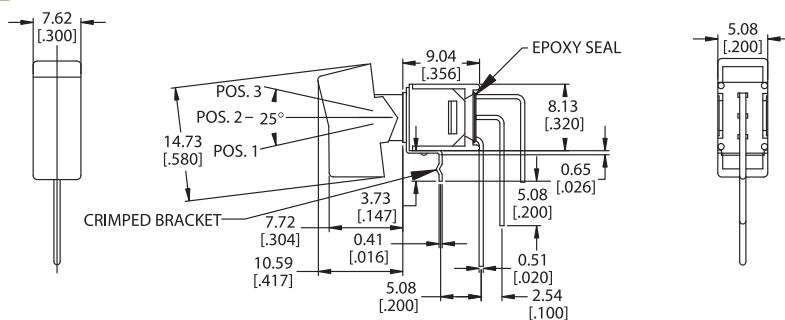TACT
SWITCHESNAVIGATION
SWITCHESPUSHBUTTON
SWITCHESTOGGLE
SWITCHESROCKER
SWITCHESSLIDE
SWITCHESSNAP-ACTION
SWITCHESDIP
SWITCHESKEYLOCK
SWITCHESROTARY
SWITCHESDETECTOR
SWITCHESCAP
OPTIONS




TACT
SWITCHESNAVIGATION
SWITCHESPUSHBUTTON
SWITCHESTOGGLE
SWITCHESROCKER
SWITCHESSLIDE
SWITCHESSNAP-ACTION
SWITCHESDIP
SWITCHESKEYLOCK
SWITCHESROTARY
SWITCHESDETECTOR
SWITCHESCAP
OPTIONS

SERIES 400 SWITCHES

ROCKER SWITCHES - SUB-MINIATURE

VS2




SPDT

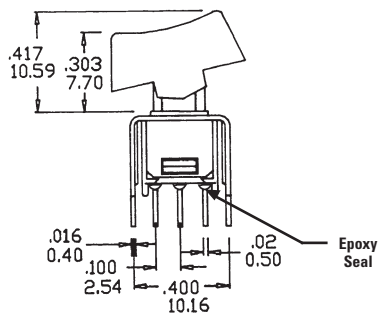

P.C. MOUNTING

VS2




DPDT

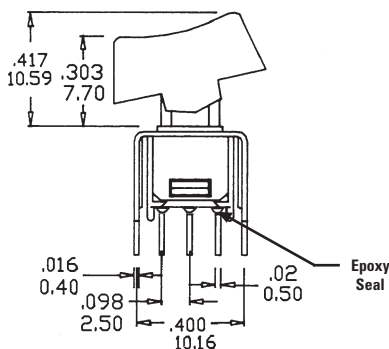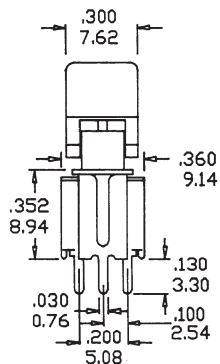

P.C. MOUNTING

VS21

SPDT

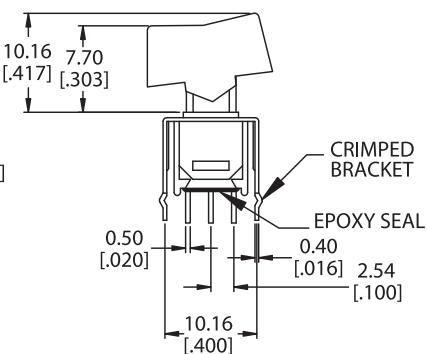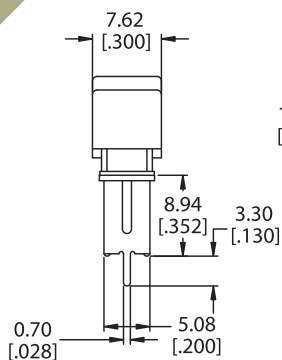

P.C. MOUNTING

CONTACT MATERIAL OPTIONS

Q

Fixed Terminal:	Silver plated copper alloy
Moving Contact:	Silver plated copper alloy
Rating:	3 AMPS @ 120 VAC or 28 VDC; 1 AMP @ 250VAC

R

Fixed Terminal:	Copper alloy with gold plate over nickel plate
Moving Contact:	Copper alloy with gold plate over nickel plate
Rating:	0.4 VA max. @ 20 VAC or DC max.