

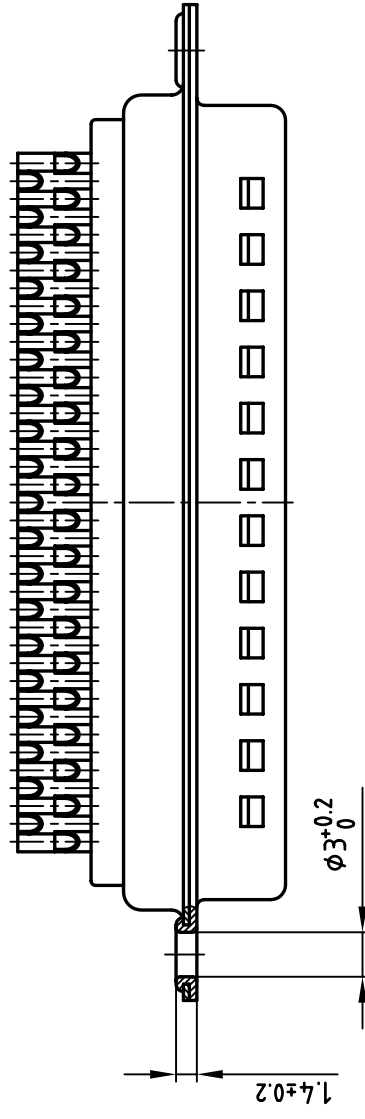


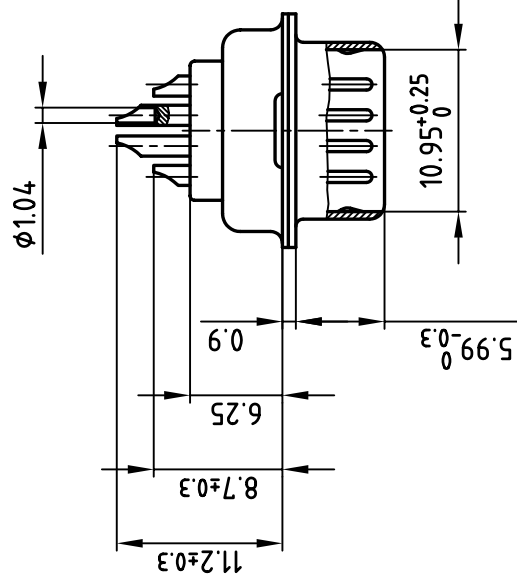

NOTES:

1. METALSHELLS: STEEL; TIN PLATED
2. INSULATORS: PBT; UL 94 V-0; BLACK
3. STAMPED CONTACTS: COPPER BASED ALLOY
4. CONTACT PLATING: HARDGOLD OVER NICKEL
5. SOLDER CUP ACCEPTS CABLE AWG 22
6. CURRENT RATING: 2.5A
7. PULL FORCE PER CONTACT: 3.4N
8. NOMINAL VOLTAGE: 125V
9. CONTACT RESISTANCE: 10mOHM
10. TEMPERATURE RATING: -65°C TO +150°C

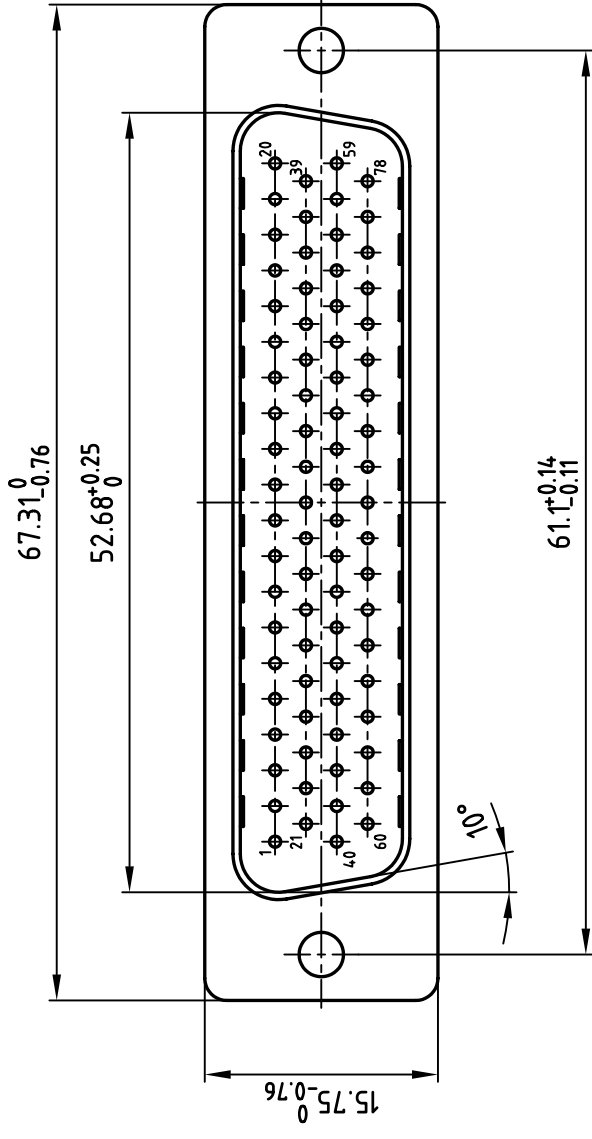

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GMBH
DO NOT ALTER CAD DRAWING BY HAND

							name
							date
							description
							rev.

tolerance			
1998	date	name	
drawn	17.08.	Barcinski	
appd.	17.08.	Mickenbecker	
norm			
d-old			



scale:	2:1				
material:	SEE NOTES				
title:	D-SUB HD MALE 78pos. SOLDER CUP STAMPED CONTACTS				
dwg no:	<table border="1"> <tr> <td>CAD/</td> <td>REL.13</td> </tr> <tr> <td colspan="2">16K1IFSA</td> </tr> </table>	CAD/	REL.13	16K1IFSA	
CAD/	REL.13				
16K1IFSA					
product no:	301A11019X				