
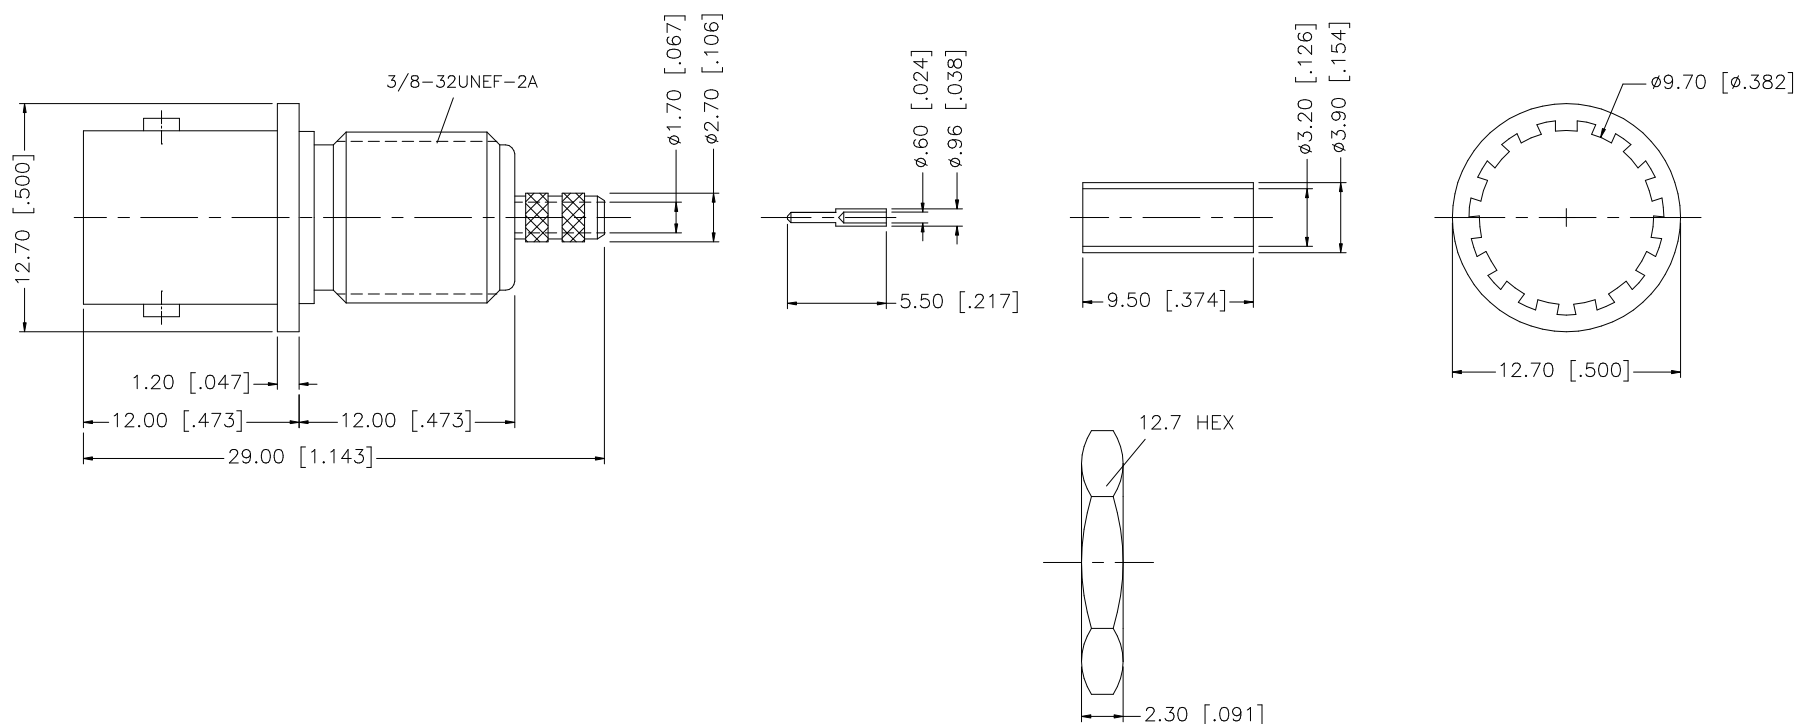


REV.	DATE	DESCRIPTION
NC	04/02/98	INITIAL RELEASE
A	05/11/98	ADD CABLE STRIPPING DIMS
B	10/18/06	UPDATE DRAWING FORMAT
C	01/09/07	REVISE DESCRIPTION TO "FRONT MOUNT"

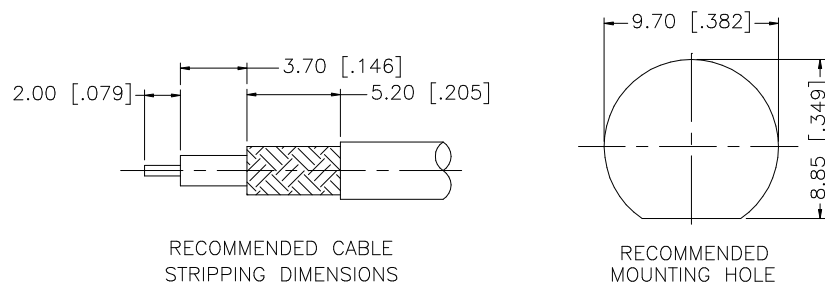

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.						01/09/07		
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	CHECKED		PART DESCRIPTION							
6	FERRULE	BRASS	NICKEL	1		ISSUED		BNC BULKHEAD CRIMP JACK – FRONT MOUNT (FOR RG–174/U, 188/U, 316/U CABLE)							
5	HEX NUT	BRASS	NICKEL	1		SHEET	1 OF 1	PART NO.							
4	LOCK WASHER	BRASS	NICKEL	1			112587								
3	CONTACT PIN	PHOS. BRONZE	GOLD	1		CAD FILE	C:/112/112587.DWG	DWG. NO.	112587.DWG	REV.	C	SIZE	A	SCALE	NA
2	INSULATOR	TEFLON	NATURAL	1		DO NOT SCALE DRAWING									
1	BODY	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY											