


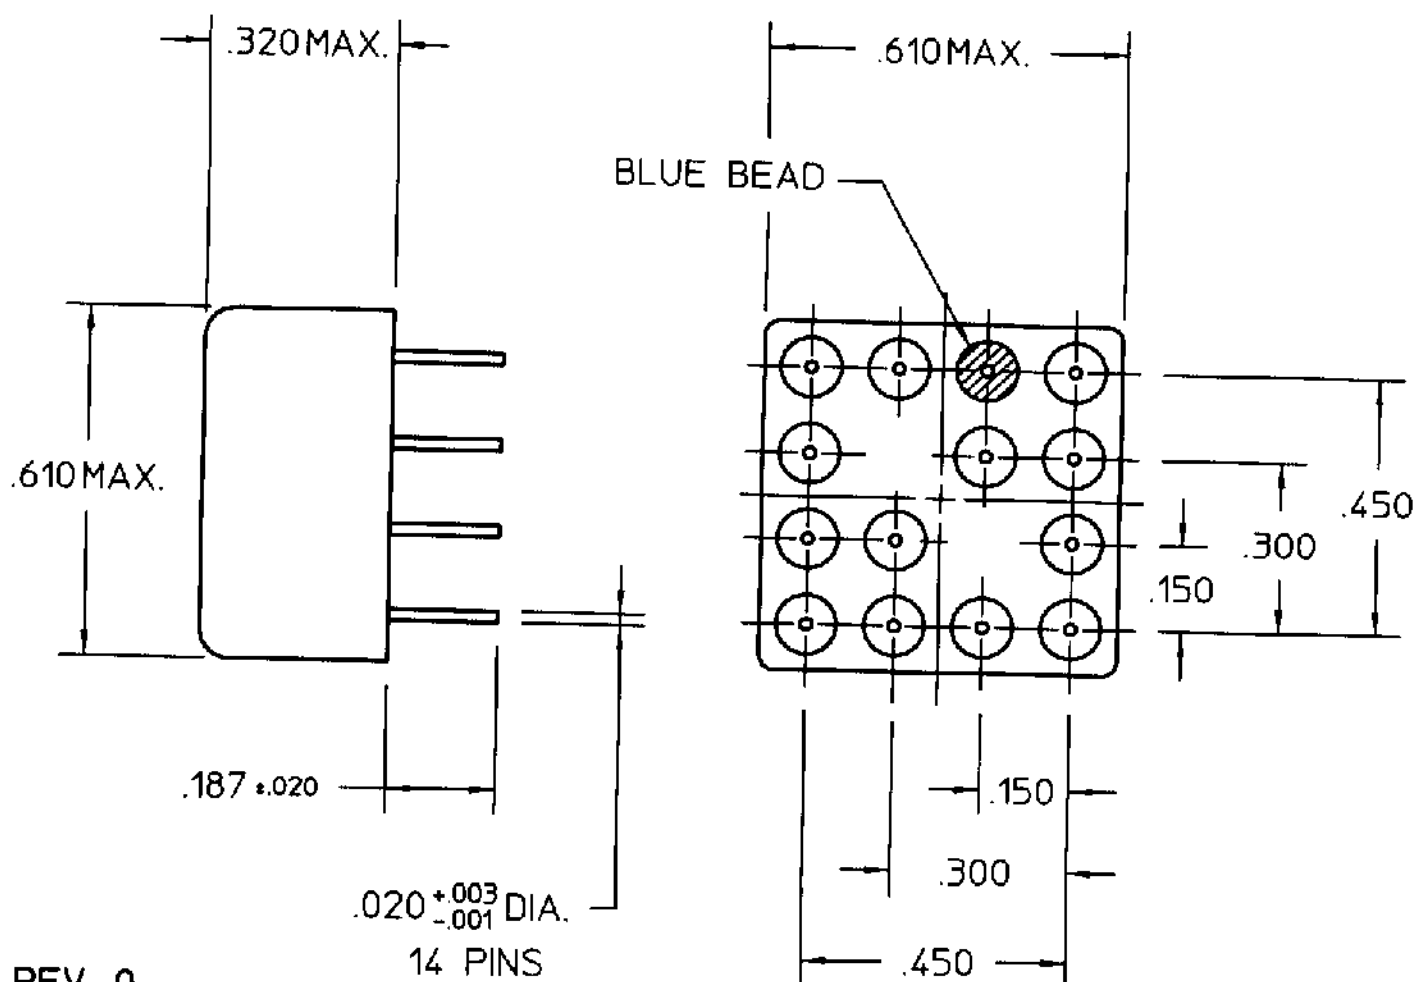

REV. 0

DCO 141447


COIL: @ 25°C	
RESISTANCE	720 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.1 VDC MAX., 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 4 MS MAX.
 RELEASE 4 MS MAX.
 CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 2 AMPS 28 VDC RESISTIVE
 100,000 OPERATIONS

DR. B.D. 10/26/99 CK6AH 10/26/99

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. OPL
 CUST. NO. M39016/14-002L REV.

'3SBH' RELAY

3SBH1142A2