

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

52207-0633

Status:


Active

Overview:

FFC-FPC (SMT)

Description:

FFC/FPC Connector, Right-Angle, SMT, ZIF, Top Contact Style Receptacle, 6 Circuits, Lead-Free, High Barrier Packaging

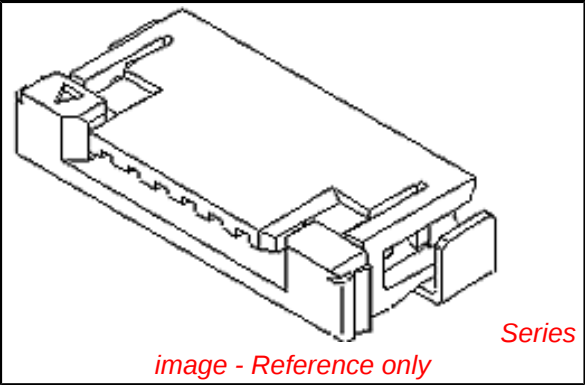

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[Product Specification PS-52207-009 \(PDF\)](#)

[Packaging Specification SPK-52207-002 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

|                                    |                       |
|------------------------------------|-----------------------|
| <b>Agency Certification</b>        |                       |
| CSA                                | LR19980               |
| UL                                 | E29179                |
| <b>General</b>                     |                       |
| Product Family                     | FFC/FPC Connectors    |
| Series                             | 52207                 |
| Overview                           | FFC-FPC (SMT)         |
| Product Name                       | Easy-On™              |
| UPC                                | 887191276373          |
| <b>Physical</b>                    |                       |
| Circuits (Loaded)                  | 6                     |
| Color - Resin                      | Natural               |
| Contact Position                   | Top                   |
| Durability (mating cycles max)     | 30                    |
| Entry Angle                        | 90° Angle             |
| Flammability                       | 94V-0                 |
| Mated Height                       | 2.70mm                |
| Material - Metal                   | Phosphor Bronze       |
| Material - Plating Mating          | Silver, Tin-Bismuth   |
| Material - Plating Termination     | Silver, Tin-Bismuth   |
| Material - Resin                   | Nylon                 |
| Net Weight                         | 311.500/mg            |
| Number of Rows                     | 1                     |
| Orientation                        | Right Angle           |
| PC Tail Length                     | 2.00mm                |
| PCB Locator                        | No                    |
| PCB Retention                      | Yes                   |
| Packaging Type                     | Embossed Tape on Reel |
| Pitch - Mating Interface           | 1.00mm                |
| Pitch - Termination Interface      | 1.00mm                |
| Polarized to PCB                   | Yes                   |
| Stackable                          | No                    |
| Temperature Range - Operating      | -30°C to +85°C        |
| Termination Interface: Style       | Surface Mount         |
| Wire/Cable Type                    | FFC/FPC               |
| <b>Electrical</b>                  |                       |
| Current - Maximum per Contact      | 1A                    |
| Voltage - Maximum                  | 125V                  |
| <b>Material Info</b>               |                       |
| <b>Reference - Drawing Numbers</b> |                       |
| Packaging Specification            | SPK-52207-002         |

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Low-Halogen Status

Not Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

52207Series

This document was generated on 09/16/2013

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**