

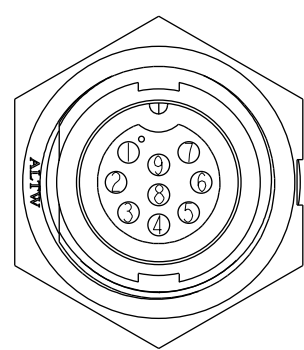
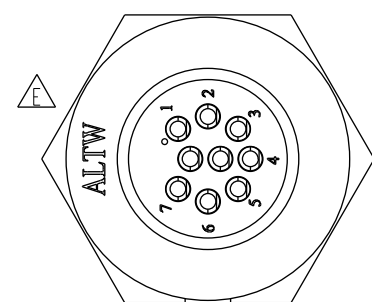
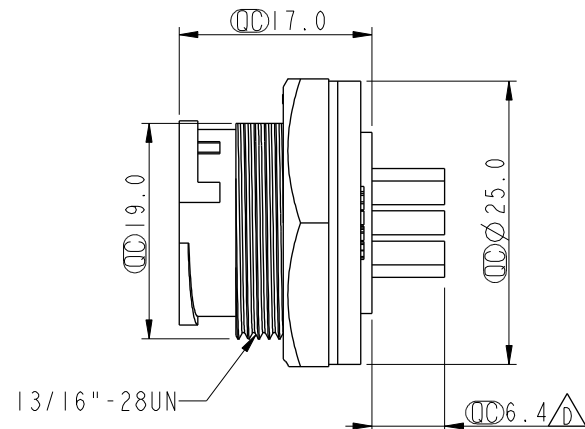
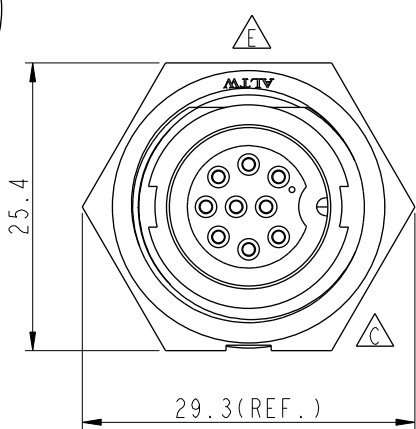


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN-910265	2008/01/15	TOMMY	CHANGE PIN DIMENSION
E	LEN1630509	2016/03/16	Ruru	Change Logo
F	CI90271	2019/03/04	Ruru	Modify Note



Pin Assignments
Front View

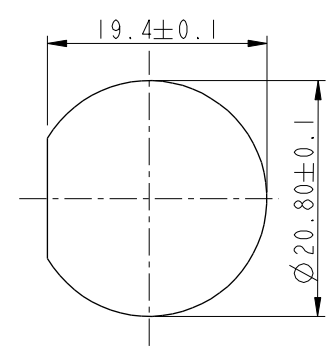

Recommended Panel Cut-Out

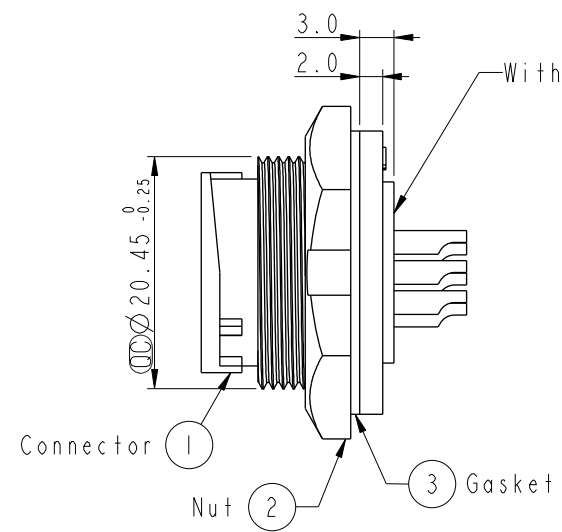

Note:

* Important Dimension To Check.

* Waterproof Rate: IP67, Unmated

* Housing: Thermoplastic, Black

* Pin: Copper Alloy, Gold Plated

* Nut: Thermoplastic, Black

* Gasket: Rubber, Black

* Use with waterproof cap or dust cap
Panel Thickness Max: 3.0mm

* Use without waterproof cap or dust cap
Panel Thickness Max: 4.0mm

* Gasket and Nut are packed separately
in PE bags.

UNIT:mm				TITLE Middle Panel Lock 9Pin M Conn F Pin		ITEM NO CD-09PMFS-LC7001		DRAWN BY Ruru		DATE 2019-03-04	
TOLERANCE		.X ±0.25		SCALE 1:1		DWG NO CD-09PMFS-LC7001		CHECKED BY Rita		DATE 2019-03-04	
.XX ±0.1		SIZE A4		SHEET 1 OF 1		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-03-04	
.XXX ±0.05		REV. F		WC-REV. A.3							
ANGLES ±1°											

Amphenol LTW
安費諾亮泰企業股份有限公司

Inspection item