
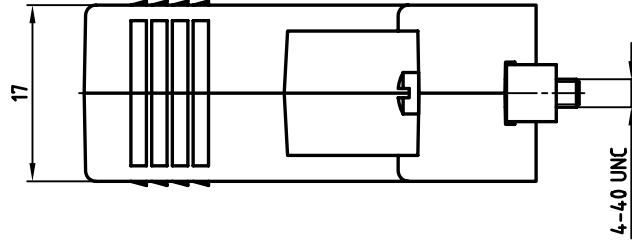
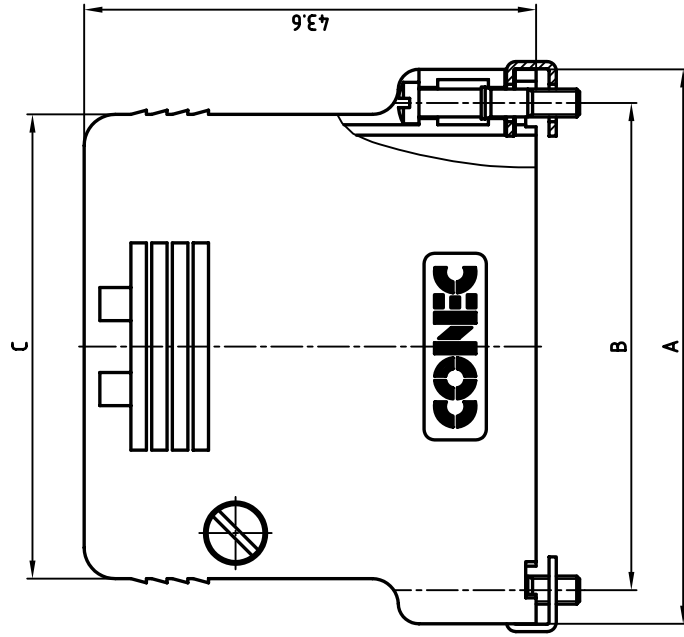


used for: D-SUB

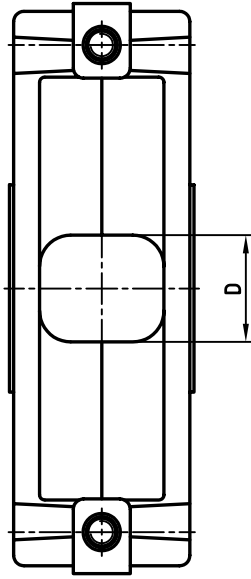

**NOTES:**  
 MATERIAL: HOOD: POLYAMID 6.6 GF 25 UL 94 V-0; BLACK  
 SCREW: COPPER ALLOY; NICKEL PLATED  
 CLAMP: STEEL; NICKEL PLATED

NO. OF POS.	A	B	C	D	PART NO.
9	31.2	25.0	22.8	8.0	165X13179X
25	53.5	47.0	44.8	10.3	165X13199X
37	69.7	63.5	61.3	10.3	165X13209X

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.  
 OWNERSHIP AND COPYRIGHT OF CONEC GMBH DO NOT ALTER CAD DRAWING BY HAND



rev.	description	date	name
"b"	Ä 547	13.12.94	Bar.

tolerance: ±0.3

scale: 2:1

material: SEE NOTES

title: TWO-PART HOOD

9, 25 and 37pos. FOR CABLE BINDING

FLAT VERSION

dwg no: AutoCADREL.13

DIN-A

3

sh: 1/1

part no: 16V110B

SEE TABLE

