


Number of contacts

30, 20

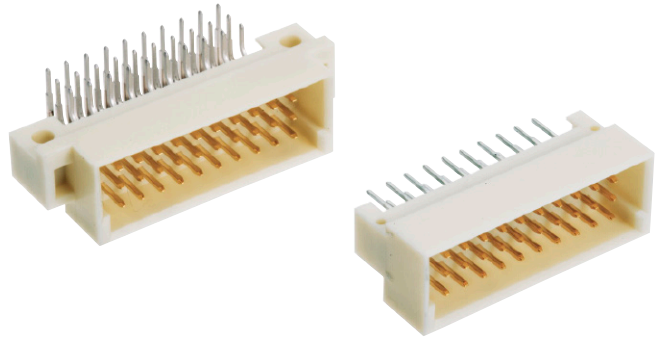

Male connectors

DIN Signal
up to 2 A

Identification	No. of contacts	Contact arrangement	Performance levels according to IEC 60 603-2.					
			3	2	1			
Male connector with angled solder pins	with fixing flange		Performance level 3 on request	09 25 130 6921 09 25 330 6921 ^{b)}	Performance level 1 on request			
		20				09 25 120 6921		
	with fixing flange, THR	30				09 25 130 6919 ^{d)}		
	without fixing flange	30				09 25 130 6571		
	without fixing flange, THR	30				09 25 130 6579 ^{d)}		
Male connector with straight solder pins	with fixing flange			Performance level 3 on request		09 25 130 6922	Performance level 1 on request	
		20						09 25 120 6922
	without fixing flange	30						09 25 130 6572
	without fixing flange, THR	30						09 25 130 6590 ^{d)}

Other contact arrangements as well with lagging/leading pins on request

^{b)} Connectors with snap-in clips see chapter 00

^{d)} CTI > 400