



-  1 RECOMMENDED PANEL THICKNESS 0.76–2.29 [.030–.090].
  -  2 PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
  -  3 OPTIONAL FOR KEYING HOUSING IN PANEL.
  -  4 CIRCUIT NUMBER 1 LOCATION.
  -  5 AMP LOGO LOCATED ONCE ON ANY INDICATED SURFACE FAR SIDE.
  -  6 DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
  -  7 OPTIONAL CONSTRUCTION PROVIDES ROUND MATERIAL REDUCTION CORING HOLES.

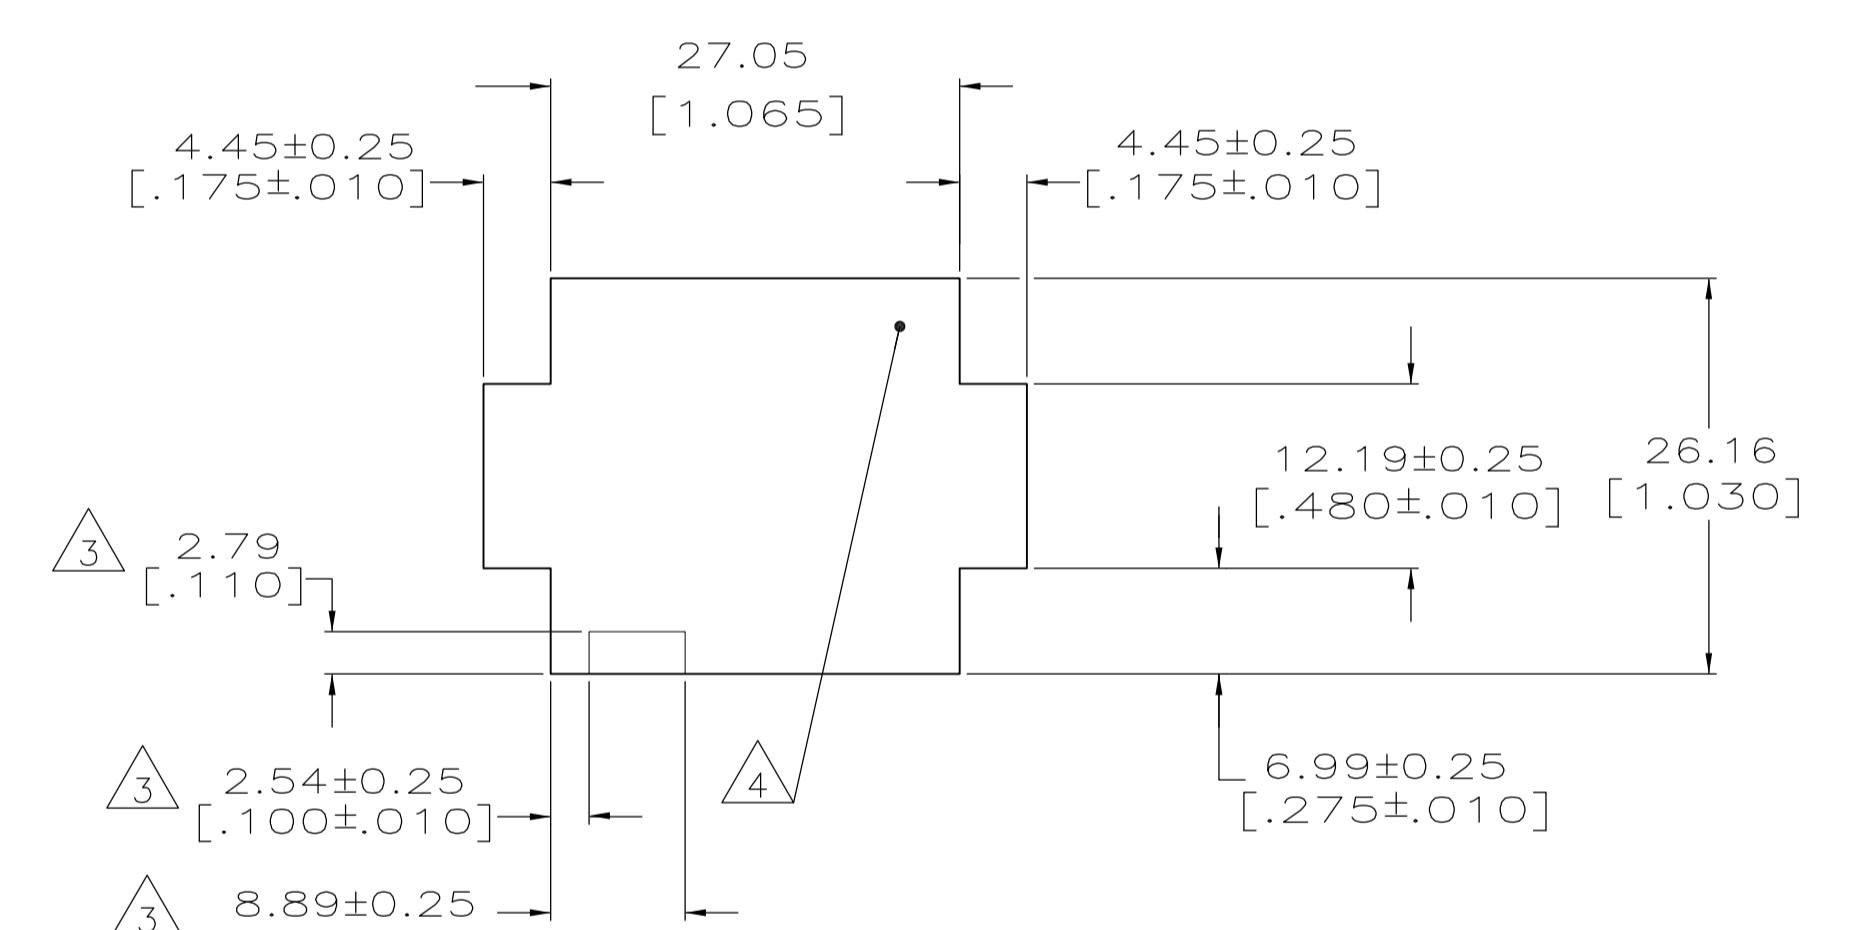

RECOMMENDED PANEL CUTOUT  
(HOUSING ENTRY SIDE)  
SCALE 2:1

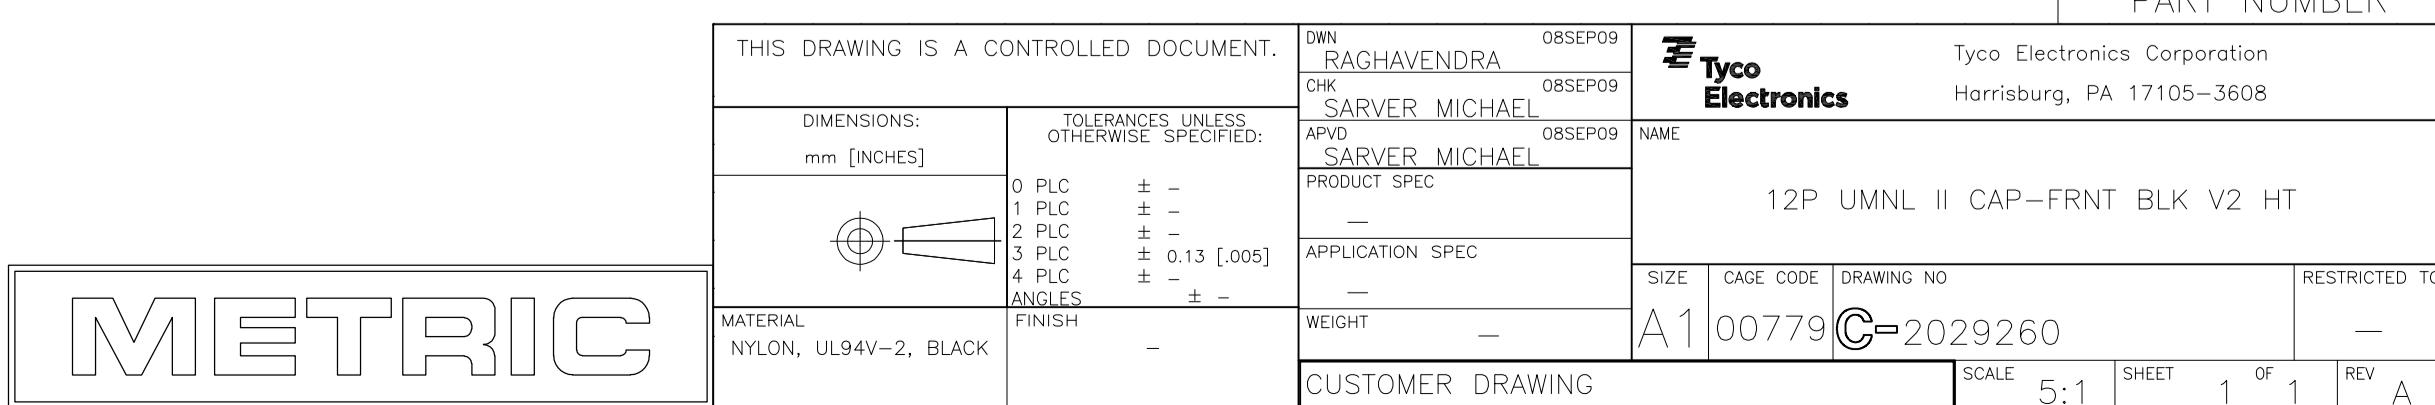

# METRIC