

REV. 0

DCO 15842


COIL: @ 25°C	
RESISTANCE	814 OHMS ±10%
NOMINAL VOLTAGE	24 VDC
MUST OPERATE	12.4 VDC
MUST RELEASE	

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	50	g's	11	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE 3.5 MS MAX  
 RELEASE 3 MS MAX  
 CONTACT BOUNCE 1 MS MAX

CUSTOMER DATA SHEET

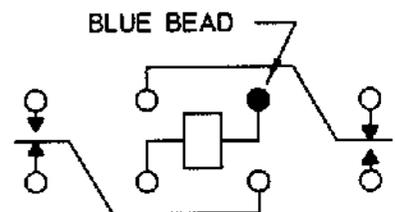

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO  
 2 AMPS 28 VDC RESISTIVE  
 100,000 OPERATIONS

DR. B.D. 9/23/99 CK64H 9/23/99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. P & B  
 CUST. NO. HCM-11DB-24 REV.

'HFW' RELAY

HEW1196S04