




TOP VIEW

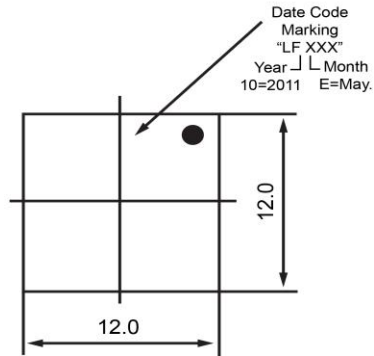


SIDE VIEW (1)




SIDE VIEW (2)



SIDE VIEW (3)



BOTTOM VIEW



## Specifications

Description	Value	Unit
Technology	Piezo	
Resonant Frequency	4,000	(Hz)
Rated Voltage	3	(V)
SPL @ 10cm	75	(dBA)
Capacitance	15,000	(pF)
Mount Type	Surface Mount	
Voltage Range	1 ~ 25	(V)
Max Rated Current	5	(mA)
Housing Material	LCP	
Operating Temperature	-40 ~ +85	°C
Storage Temperature	-40 ~ +85	°C
Weight	1	(g)

## Notes

- 1) All dimensions are in mm unless otherwise noted  
2) All parts meet RoHS



DB UNLIMITED

## Revision History

Version	Description	Date	Approved		
1	Released from Engineering	10/21/2013	J.S.		
2	Updated Operating/Storage Temp	8/7/2014	J.S.		
Drawn by	Date	Checked by	Date	Approved by	Date
A.B.	10/21/2013	C.E.	10/21/2013	J.S.	10/21/2013

Piezo Transducer

TP124003-2