

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

1705303026

Status:


Active

Overview:

Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 85 Ohm Plus 3 Pair Right Angle Daughtercard, Left Guide, 16 Columns, 144 Circuits, Plated Through Hole Dimension 0.39mm, Lead Free

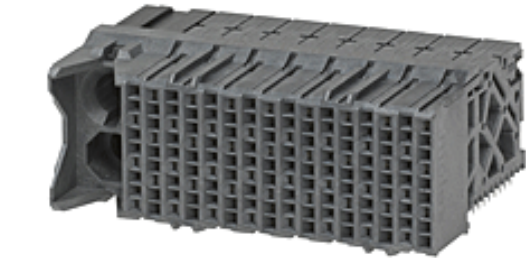

Series image - Reference only

Documents:

3D Model

Drawing (PDF)

Product Specification PS-170540-999 (PDF)

Application Specification AS-76060-990 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	170530
Application	Conventional, Coplanar, Daughtercard
Component Type	PCB Receptacle
Overview	Impact™ Backplane Connector and Cable Assembly System
Product Name	Impact™
UPC	884982613423
Physical	
Circuits (Loaded)	144
Circuits (maximum)	144
Color - Resin	Gray
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	Yes
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	16.886/g
Number of Columns	16
Number of Pairs	3
Number of Rows	9
Orientation	Right Angle
PC Tail Length	1.20mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.35mm, 1.90mm
Pitch - Termination Interface	1.35mm, 1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin
Electrical	

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Contains SVHC(2014 December 17): No	
Halogen-Free	
Status	
Low-Halogen	
Need more information on product environmental compliance?	
Email productcompliance@molex.com	
Please visit the Contact Us section for any non-product compliance questions.	
China ROHS	Green Image
ELV	Not Relevant

Search Parts in this Series	
170530 Series	
Mates With	
170525 Impact™ 85 Ohm Plus Vertical Header	
Application Tooling FAQ	
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.	
Global	
Description	Product #
Impact Daughter	0622024300
Card Extraction Tool	
Impact™ Daughter	0622024600
Card Module	
Removal Tool	
Daughter Card	0622018650
Module Installation	

Current - Maximum per Contact	0.75A	Press-In Tool for 3-Pair by 16-Column Assemblies
Data Rate	25.0 Gbps	
Impedance	85#	
Shield Type	N/A	
Shielded	No	
Voltage - Maximum	30V AC (RMS)/DC	
Solder Process Data		
Lead-freeProcess Capability	N/A	
Material Info		
Reference - Drawing Numbers		
Application Specification	AS-76060-990	
Electrical Model Document	EE-170530-025, EE-170530-040	
Product Specification	PS-170540-999	
S-Parameter Model	SP-170530-0001, SP-170530-0001_40G	
Sales Drawing	SD-170530-0002	
Symbol/Footprint Data	SYM-170530-3026	

This document was generated on 07/01/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION