
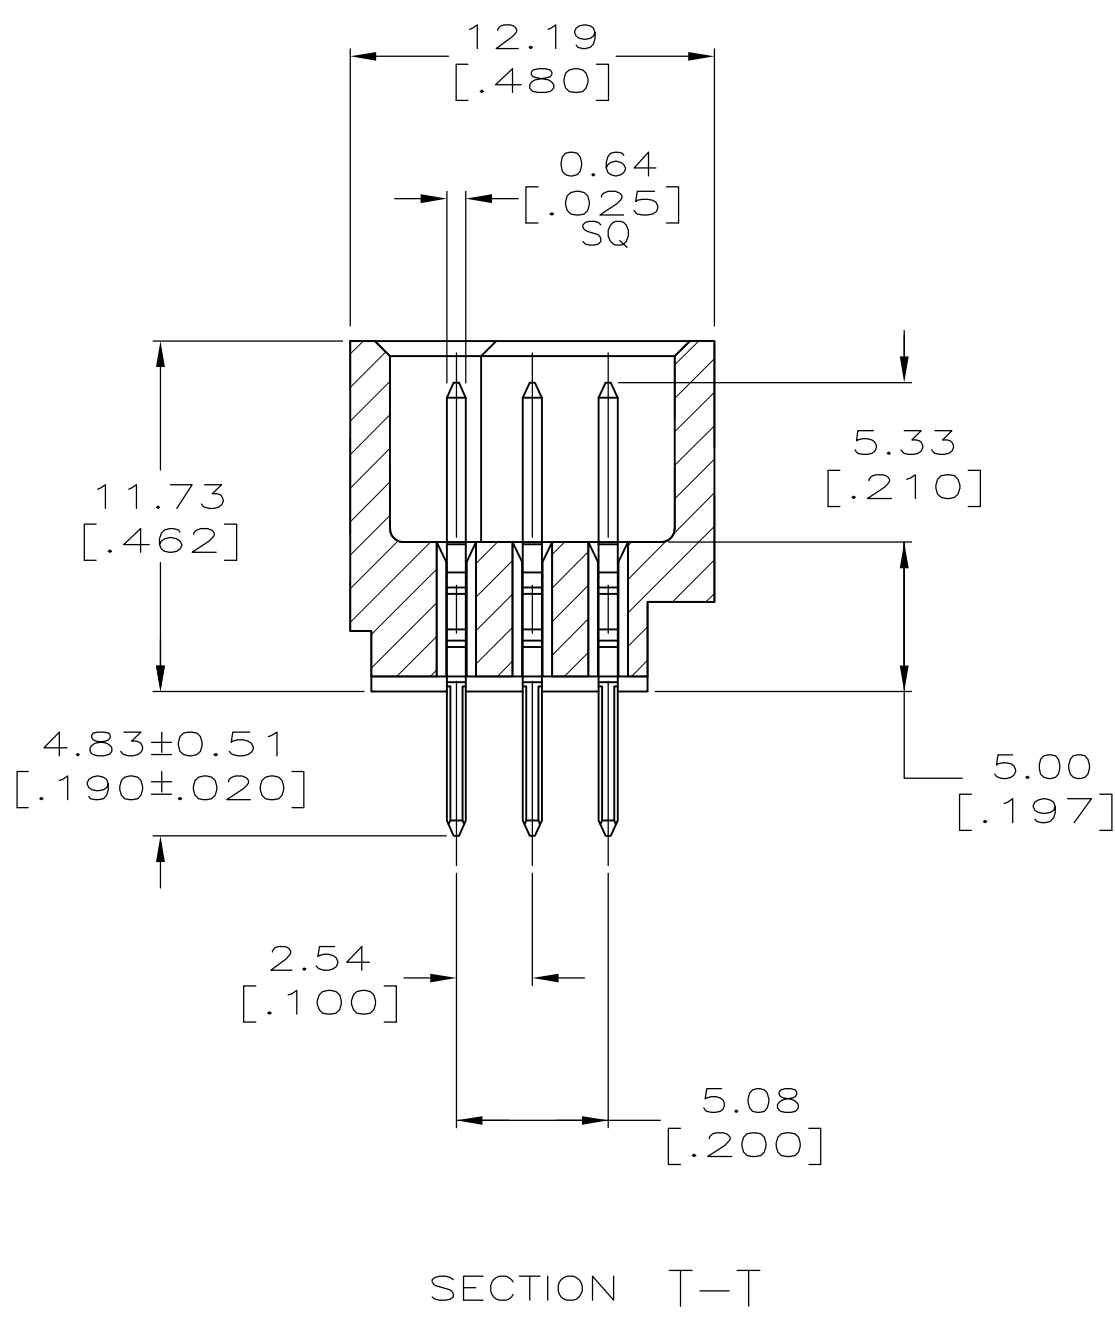
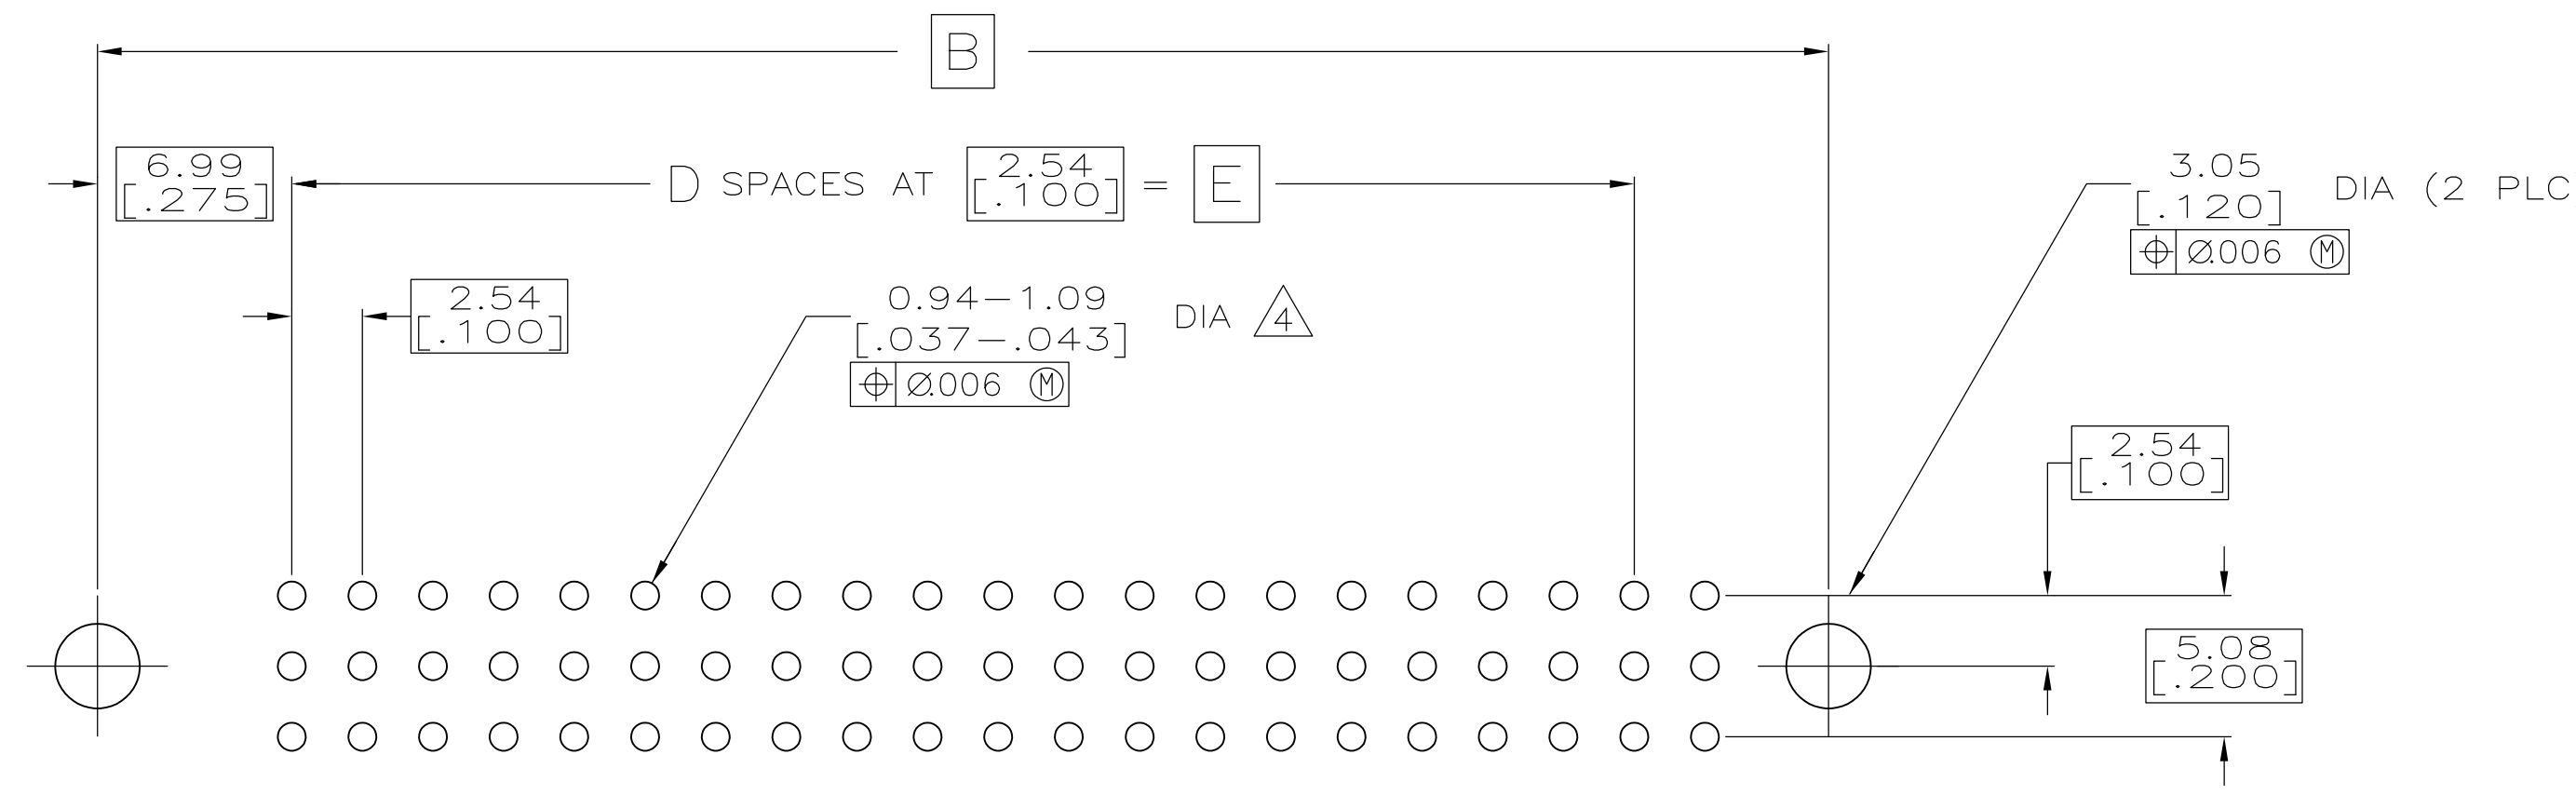
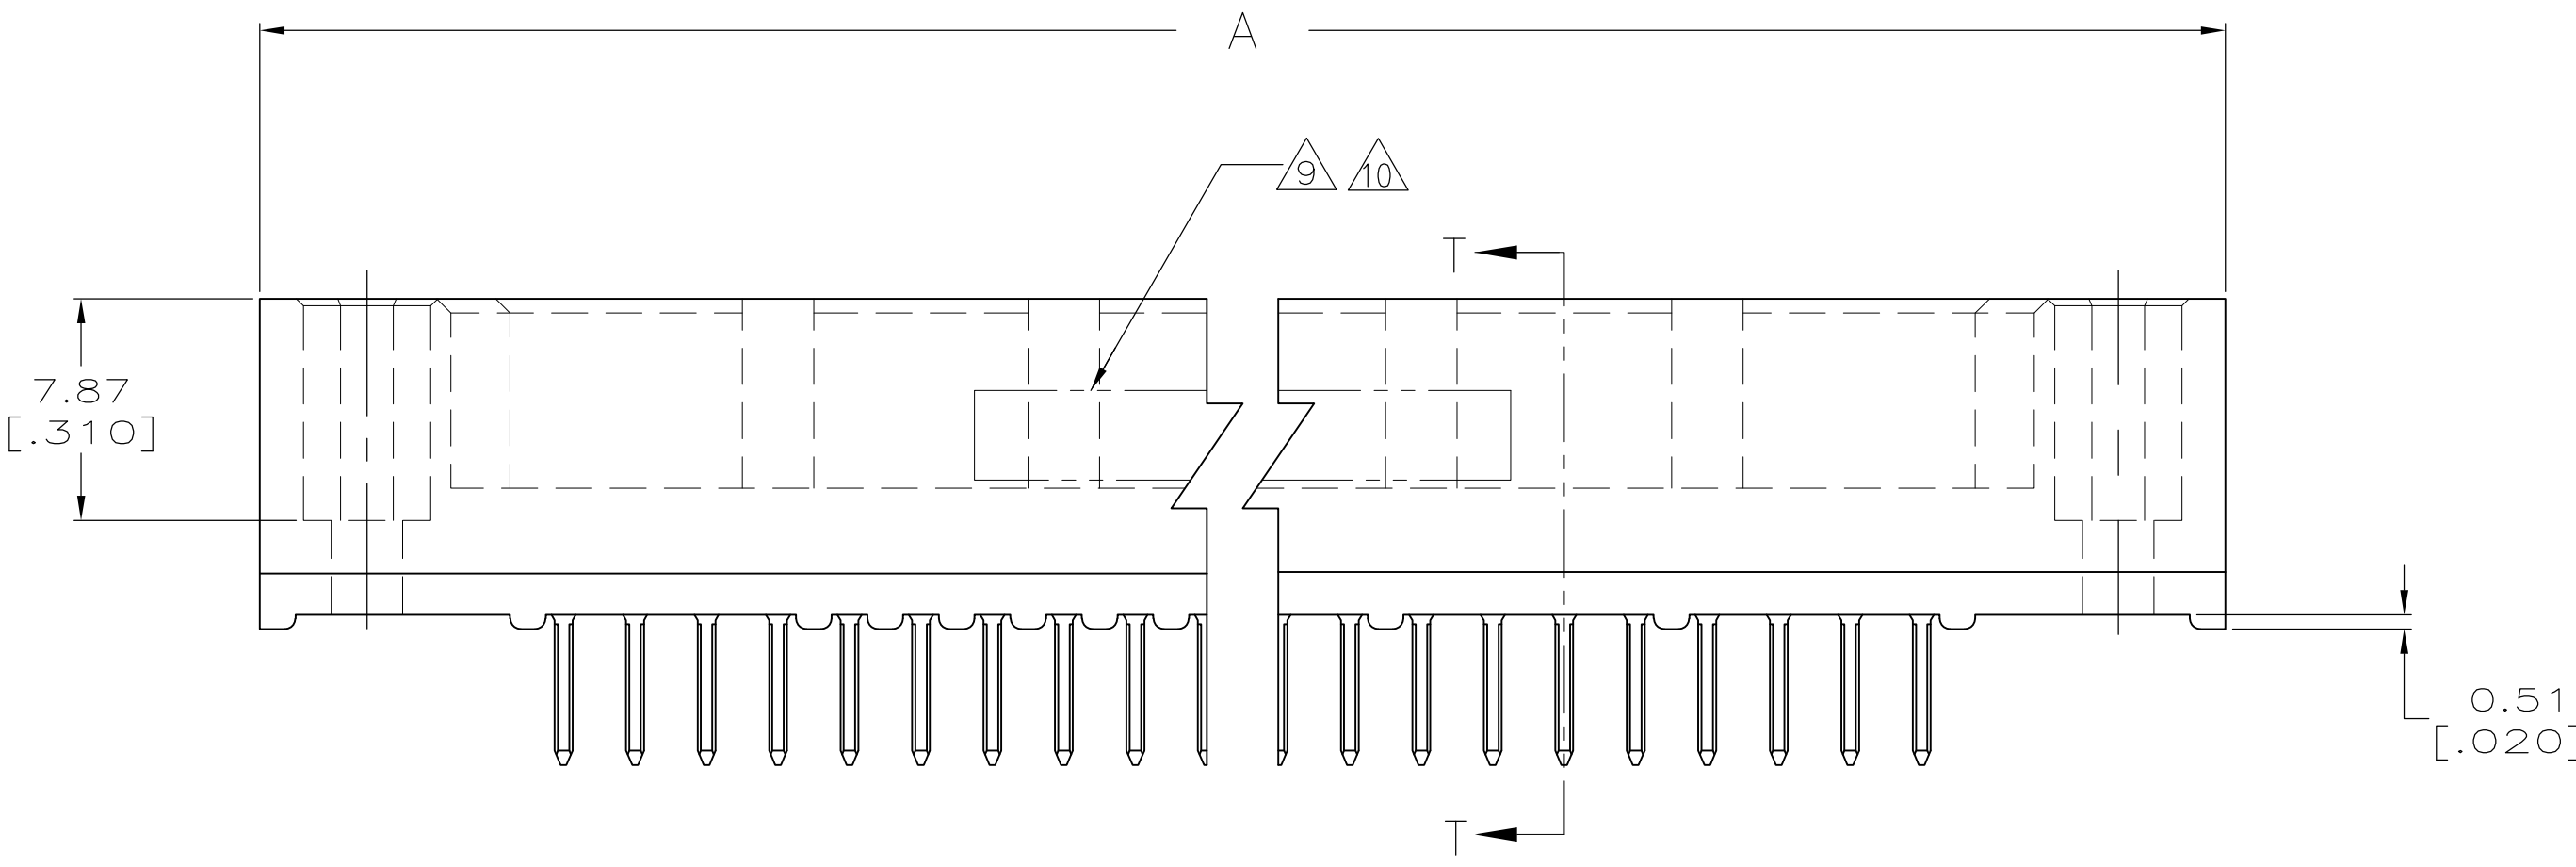


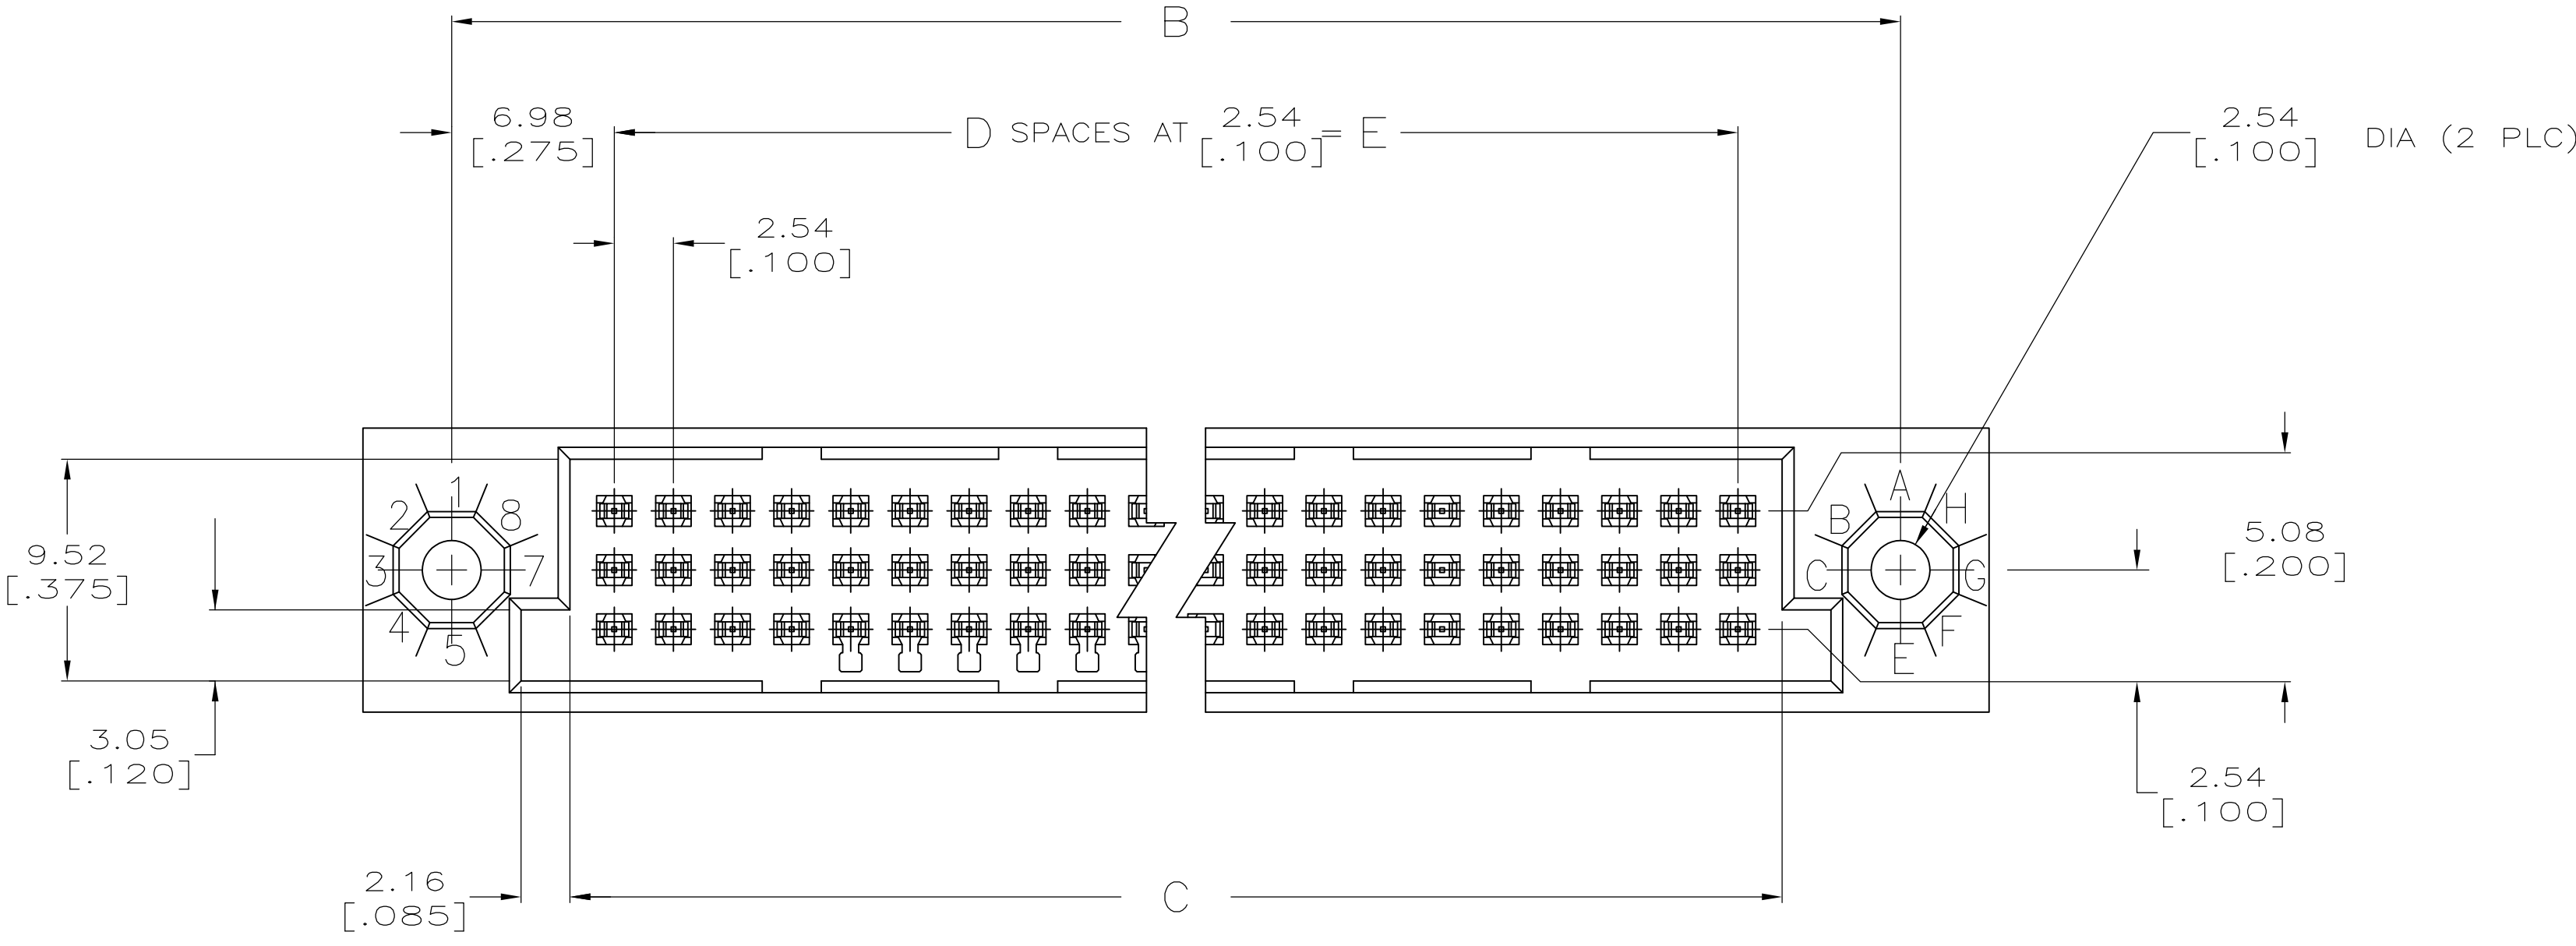

RECOMMENDED P.C. BOARD LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R.K. SEIFRIED
CHK
G.SKIPPER
APVD
-

04/09/90
01/21/92
-

DIMENSIONS:
mm [INCHES]

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± 0.13 [.005]

4 PLC ± -

ANGLES ± -

1 2

3 4

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 0

CUSTOMER DRAWING

TE Connectivity

HDI, 3 ROW, PIN ASSEMBLY
4.83 [.190] LONG SOLDER PINS

SIZE A1
CAGE CODE 00779
DRAWING NO. 532433
RESTRICTED TO -

SCALE 4:1
SHEET 1 OF 2
REV AA

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

1

2

3

4

5

6

7

8

9

10

11

12

HOUSING MATERIAL: THERMOPLASTIC, COLOR—BLACK.

CONTACT MATERIAL: PHOSPHOR BRONZE.

FINISH:

MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108—9063; BASED ON TELCORDIA DR—1217—CORE APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.

SOLDER TAILS AREA: TIN—LEAD PLATED.

SOLDER PIN POST RECOMMENDED P.C. BOARD HOLE SIZES ARE 0.94—1.09 [.037—.043]; RECOMMENDED PAD DIA IS 1.52 [.060].

5. DIMENSIONS IN BRACKETS ARE IN INCHES.

HOUSINGS WITH CENTER MOUNTING IS RECOMMENDED FOR ASSEMBLIES HAVING 75 CONTACTS PER ROW OR MORE.

PART NUMBER IS OBSOLETE.

NO CONTACT LUBRICANT

AMP, PART NUMBER, AND DATE CODE

OEFD0—983—9909—106, REV __, 00779 AND DATE CODE, ONLY FOR PART NUMBER 2—532433—3

PART NUMBER IS FOR ROCKWELL COLLINS.

FINISH:

CONTACT FINISH: .00127—.00254 [.000050—.000100] NICKEL UNDERPLATE ALL OVER; .000762 [.000030] GOLD PLATE IN CONTACT AREA, TIN—LEAD PLATED POSTS.

REVISIONS

#	LT#	DESCRIPTION	DATE	OWN	APVD
—	—	SEE SHEET 1	—	—	—

137.16 [5.400]	54	140.97 [5.550]	151.13 [5.950]	158.75 [6.250]	165	3—532433—8
60.96 [2.400]	24	64.77 [2.550]	74.93 [2.950]	82.55 [3.250]	75	3—532433—1
60.96 [2.400]	24	64.77 [2.550]	74.93 [2.950]	82.55 [3.250]	75	2—532433—3
—	—	—	—	—	—	2—532433—2
43.18 [1.700]	17	46.99 [1.850]	57.15 [2.250]	64.77 [2.550]	54	2—532433—1
—	—	—	—	—	—	2—532433—0
210.82 [8.300]	83	214.63 [8.450]	224.79 [8.850]	232.41 [9.150]	252	1—532433—9
—	—	—	—	—	—	1—532433—8
—	—	—	—	—	—	1—532433—7
—	—	—	—	—	—	1—532433—6
—	—	—	—	—	—	1—532433—5
213.36 [8.400]	84	217.17 [8.550]	227.33 [8.950]	234.95 [9.250]	255	1—532433—4
200.66 [7.900]	79	204.47 [8.050]	214.63 [8.450]	222.25 [8.750]	240	1—532433—3
187.96 [7.400]	74	191.77 [7.550]	201.93 [7.950]	209.55 [8.250]	225	1—532433—2
175.26 [6.900]	69	179.07 [7.050]	189.23 [7.450]	196.85 [7.750]	210	1—532433—1
162.56 [6.400]	64	166.37 [6.550]	176.53 [6.950]	184.15 [7.250]	195	1—532433—0
149.86 [5.900]	59	153.67 [6.050]	163.83 [6.450]	171.45 [6.750]	180	532433—9
137.16 [5.400]	54	140.97 [5.550]	151.13 [5.950]	158.75 [6.250]	165	532433—8
124.46 [4.900]	49	128.27 [5.050]	138.43 [5.450]	146.05 [5.750]	150	532433—7
111.76 [4.400]	44	115.57 [4.550]	125.73 [4.950]	133.35 [5.250]	135	532433—6
99.06 [3.900]	39	102.87 [4.050]	113.03 [4.450]	120.65 [4.750]	120	532433—5
86.36 [3.400]	34	90.17 [3.550]	100.33 [3.950]	107.95 [4.250]	105	532433—4
78.74 [3.100]	31	82.55 [3.250]	92.71 [3.650]	100.33 [3.950]	96	532433—3
73.66 [2.900]	29	77.47 [3.050]	87.63 [3.450]	95.25 [3.750]	90	532433—2
60.96 [2.400]	24	64.77 [2.550]	74.93 [2.950]	82.55 [3.250]	75	532433—1
E	D	C	B	A	POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

0 PLG ± —

1 PLG ± —

2 PLG ± —

3 PLG ± 0.13 [.005]

4 PLG ± —

ANGLES ± —

Ø

MATERIAL

FINISH

OWN
R.K. SEIFRIED
CHK
G.SKIPPER
APVD
—

04/09/90
01/21/92
—

PRODUCT SPEC
—

APPLICATION SPEC
—

WEIGHT
0

CUSTOMER DRAWING

TE Connectivity

NAME
HDI, 3 ROW, PIN ASSEMBLY,
4.83 [.190] LONG SOLDER PINS
—

SIZE
A1

CAGE CODE
00779

DRAWING NO
532433

RESTRICTED TO
—

SCALE
4:1

SHEET
2

OF
2

REV
AA

4805 (1/15)