


1	2	3	4
Empfohlener Ausschnitt fuer Rastbefestigung (Graf gegenueber Bestueckungsseite) recommended cut-out for snap-in fixing (ledge opposite to snap-in direction)	Wanddicke wall thickness 0.75 bis/to 1.25 1.25 bis/to 2 2 bis/to 3	Ausschnittlaenge length of cut-out 26.2 _{-0.1} 26.4 _{-0.1} 26.8 _{-0.1}	Ausschnittbreite width of cut-out 12.4 ^{+0.1} 12.4 ^{+0.1} 12.4 ^{+0.1}



Aufschrift
Marking

● 155..
16(4)/250 ~ T100/55 T100
10(4)/250 ~ 5E4
5/100A 250V ~

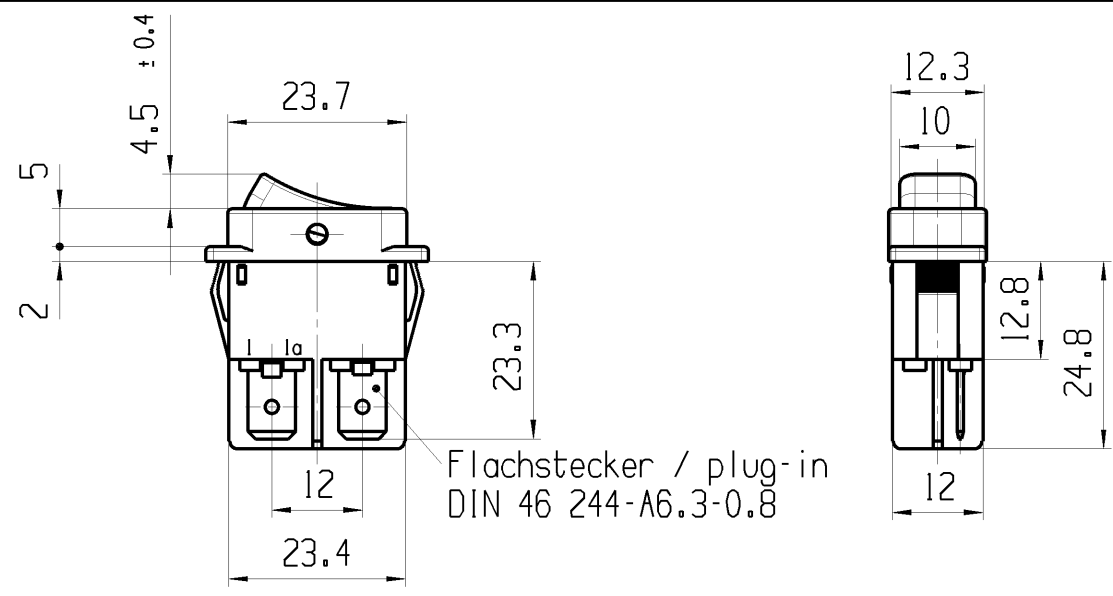

16A 125-250V AC
1 HP 125V AC
2 HP 250V AC
R38

Herstellort/-jahr/-woche
nach DIN EN 60062
code of manufacture:
place/year/week
acc. to DIN EN 60062

Schliesser 1-polig
Fuer Geraete der Klasse II geeignet

SPNO
suitable for appliances of class II

fuer Form und Lage FOR SHAPE AND LOC.	☉ =		Allgemeintoleranzen UNTOLERANCED DIMENSIONS					Pause COPY	Blatt SHEET 01		TYP K	Zeichn./DRAWING NO. 15513702	Index e		
			PROJEKTION	Abmasse und Nennmassbereiche Angaben in mm	0-6 ± 0.2 >6-15 ± 0.4 >15-30 ± 0.4 >30-70 ± >70-120 ± >120-200 ±	Laenge LENGTH	Radien RADI								
fuer Winkel FOR ANGLE ±				ALL DIMENSIONS ARE IN MILLIMETRES						Original Din A4 SCALE 1:1	GERAETESCHALTER appliance switch				
d	51422	11.04.07	BRC					CAD: UG_NX6	 MARQUARDT						
c	35129	26.02.03	WJ					gez./DRAWN BY 12.03.07 BRC gepr./CHECKED BY							
b	23635	16.01.96	RS												
a	21323	24.03.92	MUT	e	69572	02.03.11	HHE	Ersatz fuer/REPLACEMENT OF Zg.gl.Nr.v.17.10.89							
Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY		Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY									