


D



C

B


A

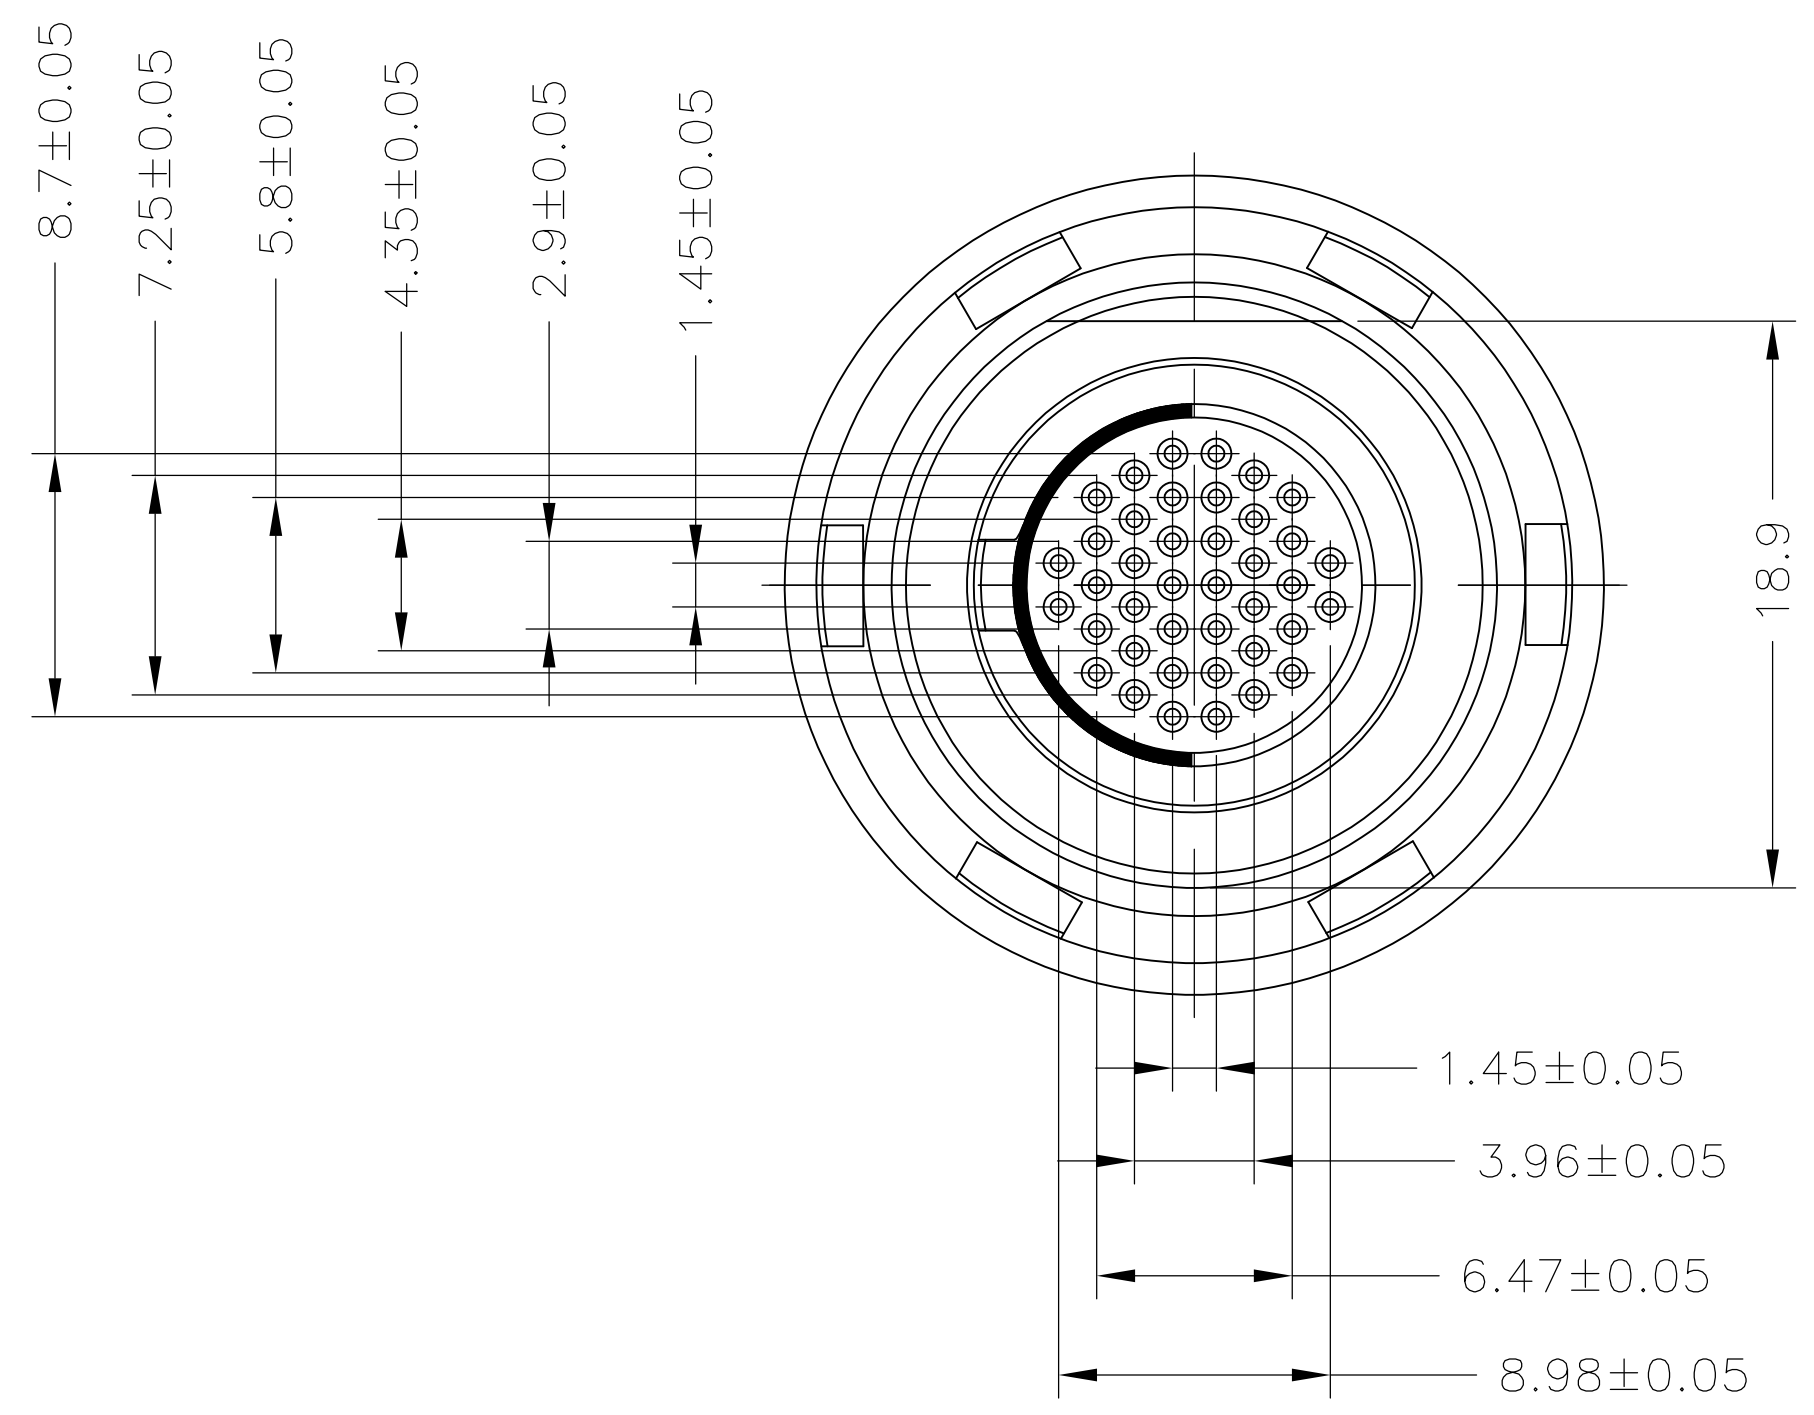



SINGLE POLARIZATION

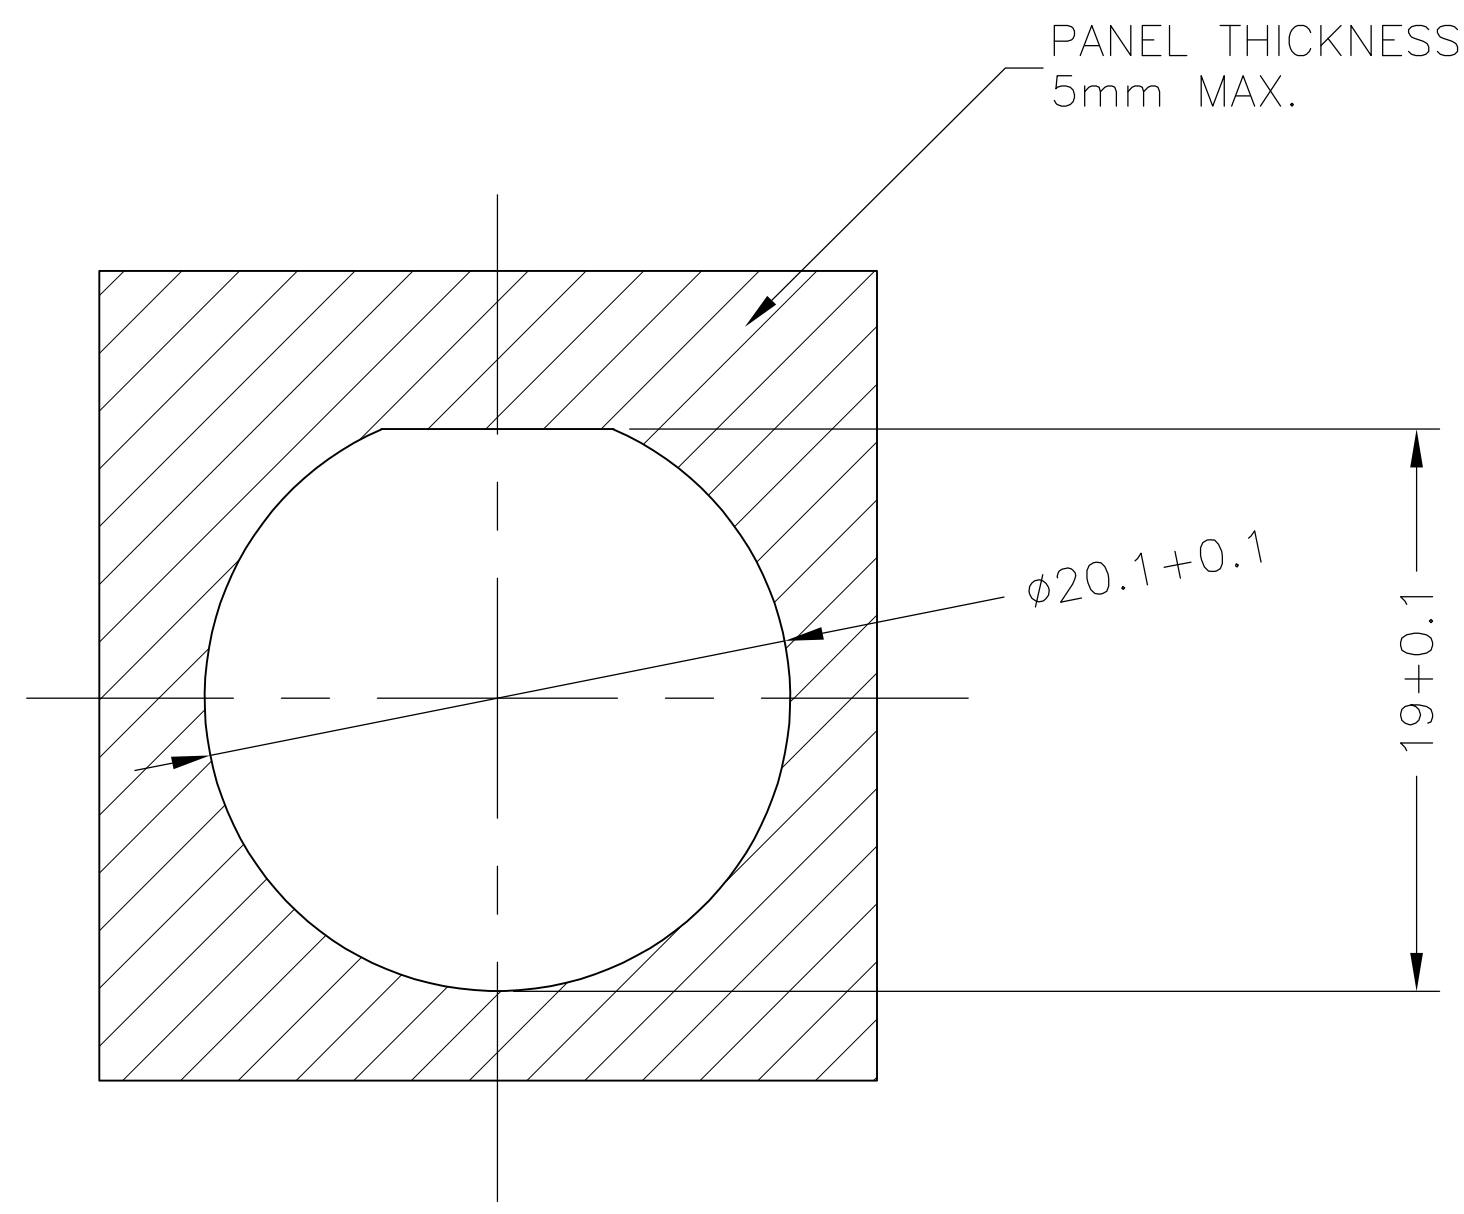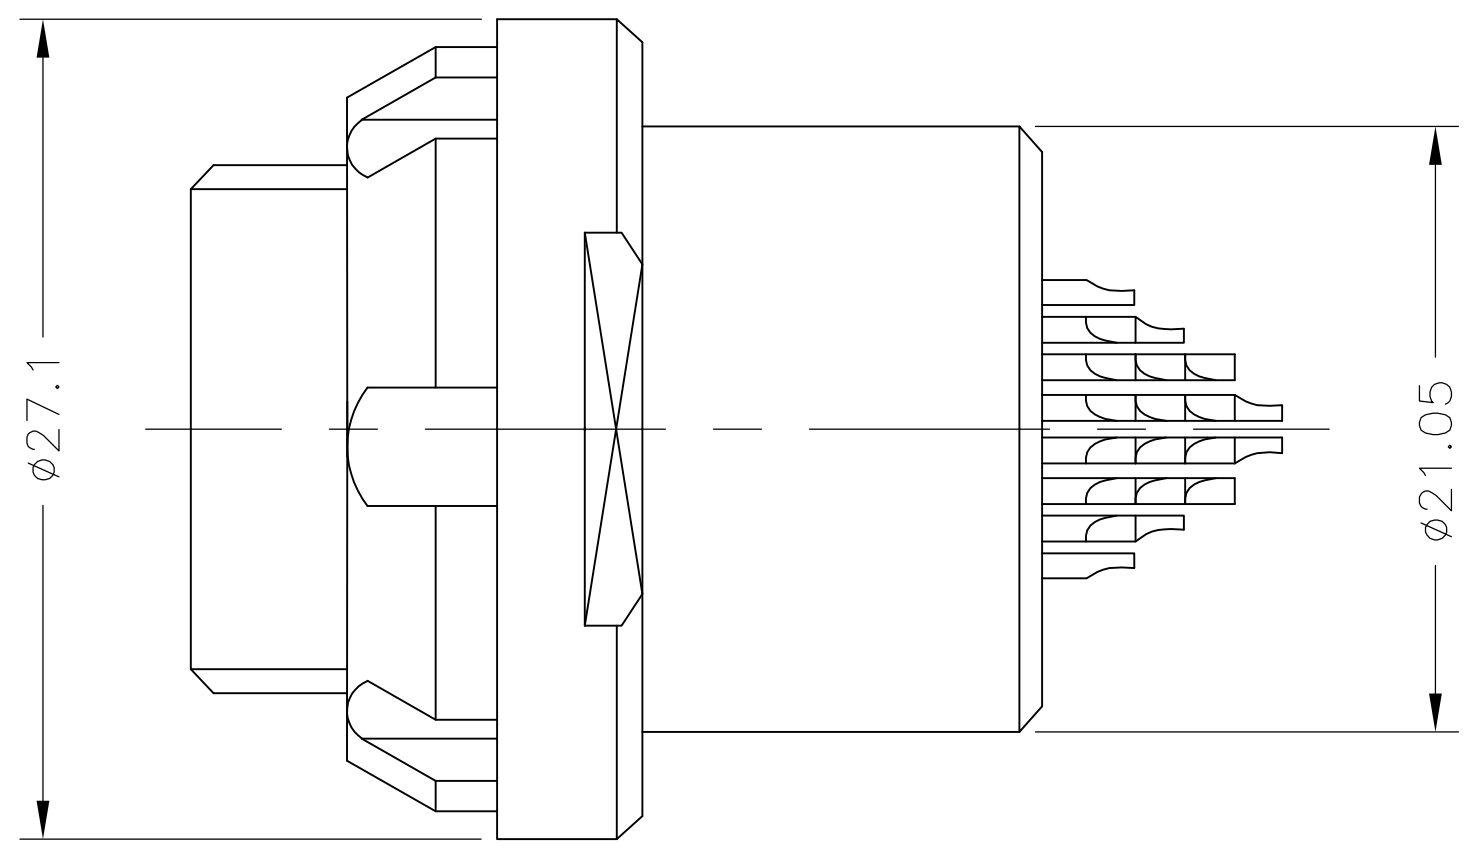

PANEL CUTOUT

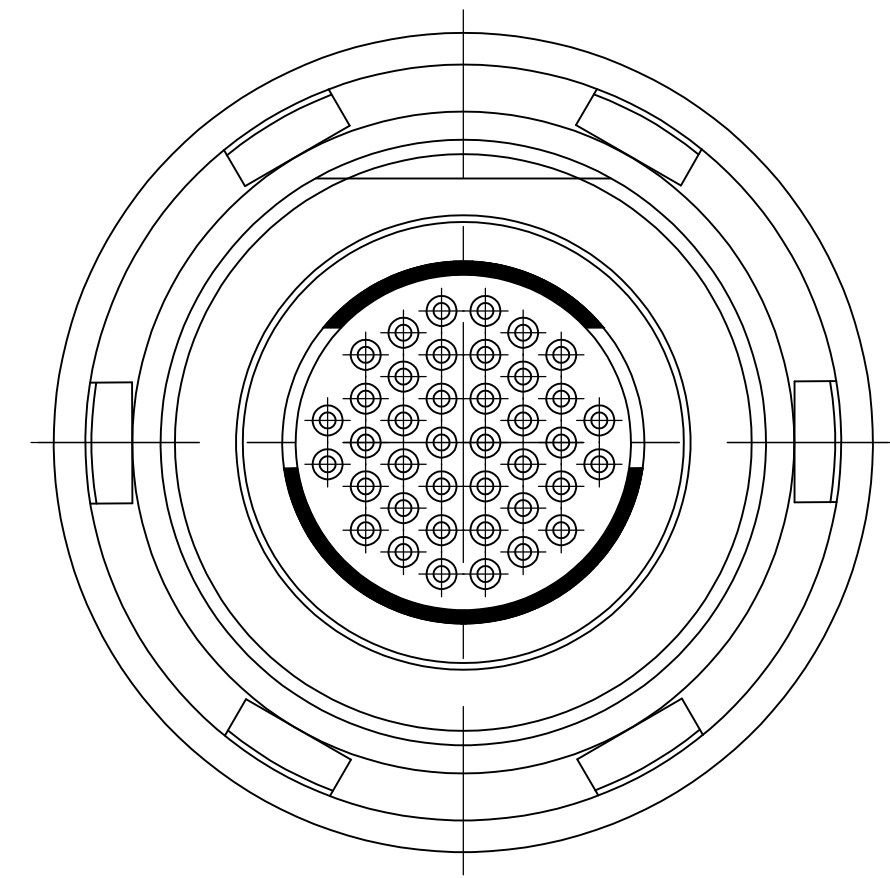

DOUBLE POLARIZATION

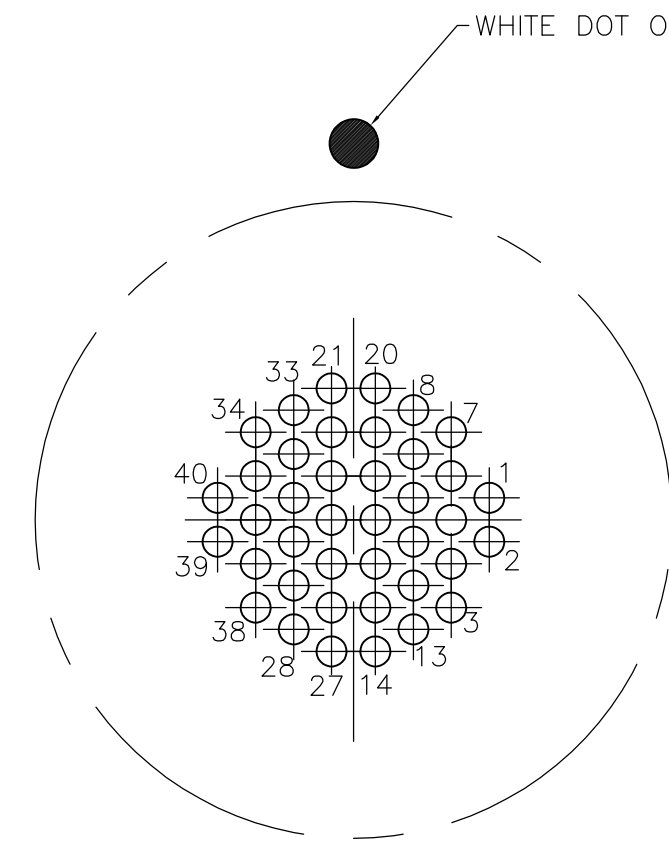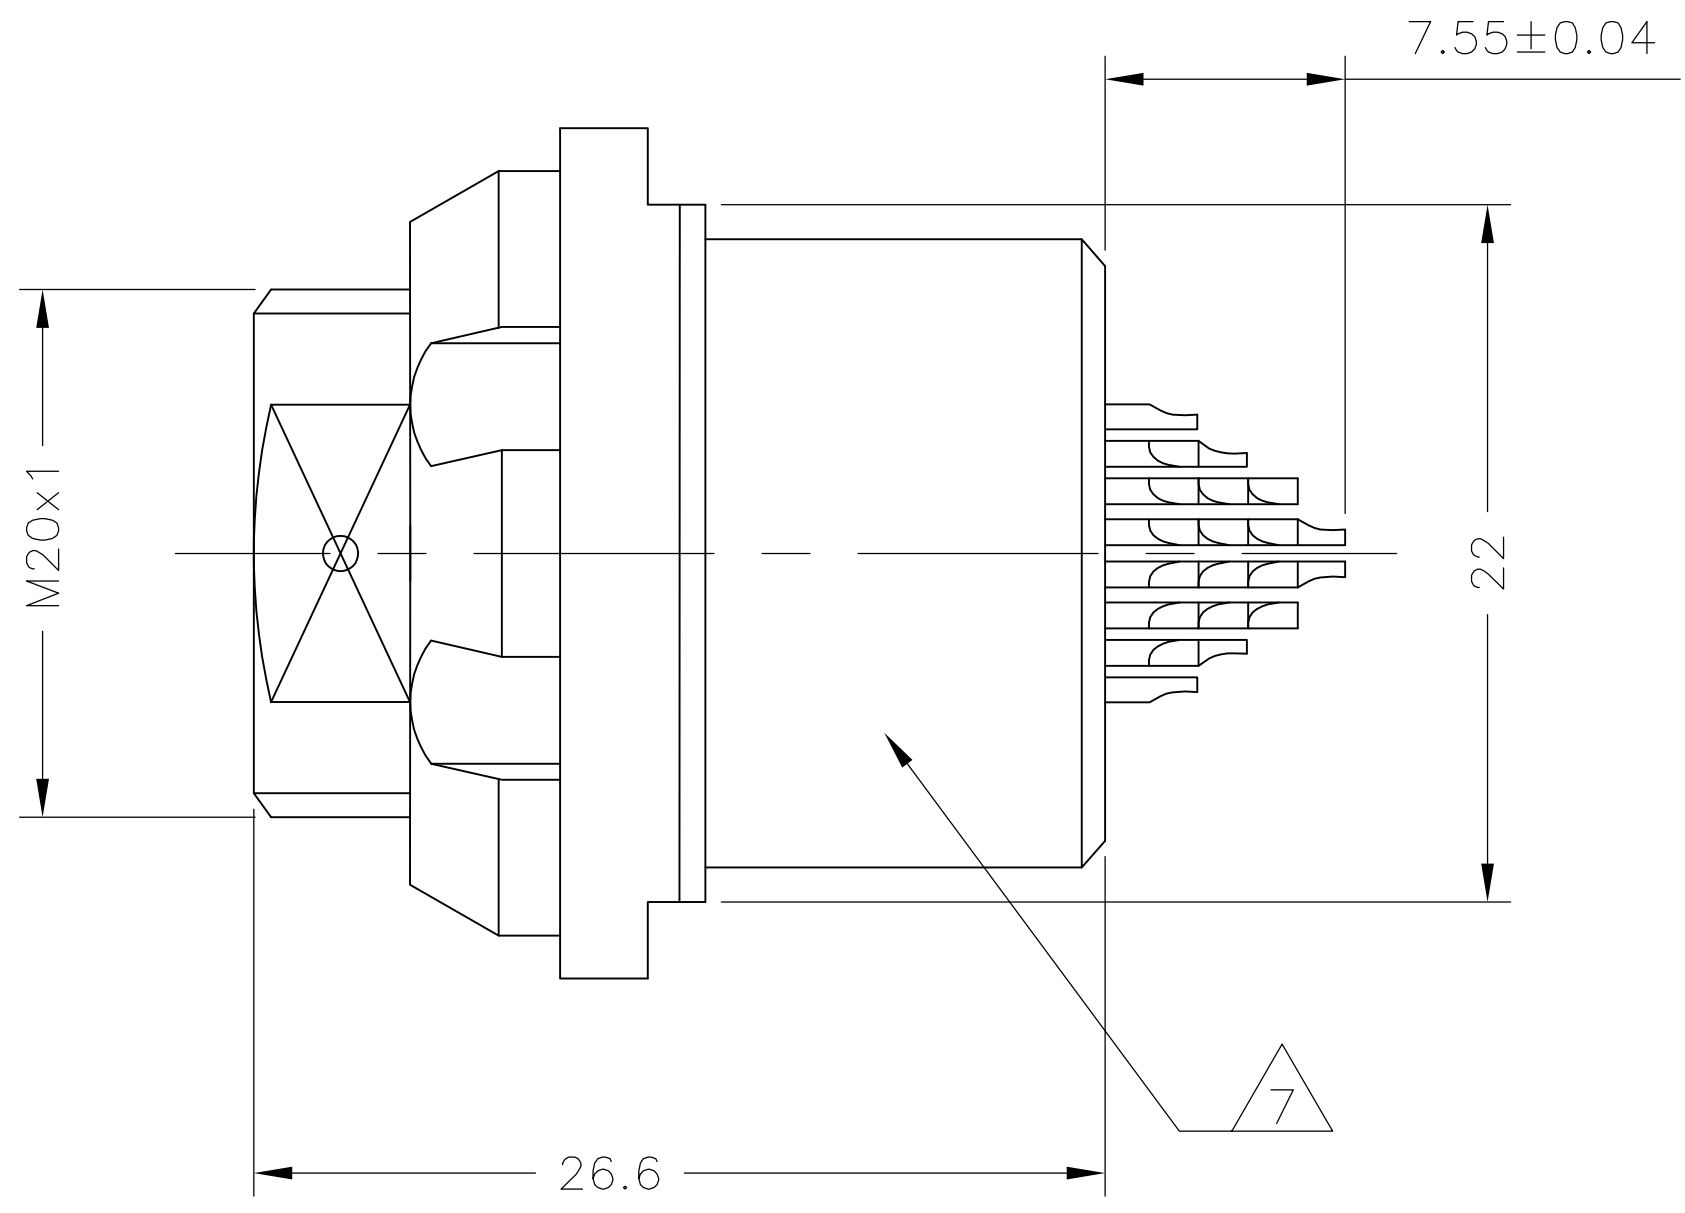

CAVITY IDENTIFICATION WHEN VIEWED FROM REAR OF CONNECTOR

- DWV RATING: 725VAC @ SEA LEVEL
- WIRE SIZE: 28 AWG MAX
- WORKING TEMPERATURE: -55°C ~ +125°C

4 MATERIAL:
CONTACT : COPPER ALLOY
SHELL : COPPER ALLOY
INSULATOR : PEEK
O RING : SILICON RUBBER


5 FINISH
CONTACT: GOLD OVER NICKEL
SHELL : BLACK CHROMIUM

6. WATER PROOF: 1M IMMERSION

7 PART IS MARKED WITH TE PART NUMBER, CHINA, DATE CODE AND LOT ID

8 ALL TOLERANCES +/-0.20 UNLESS NOTED.

5	CHROMIUM-BLACK	DOUBLE	SOLDER CUP	2101677-2
5	CHROMIUM-BLACK	SINGLE	SOLDER CUP	2101677-1
SHELL SIZE	FINISH	POLARIZATION	TERMINATION	TE CONNECTIVITY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C. THOMAS 03MAR2010	TE Connectivity	
DIMENSIONS: mm		CHK R. GROSS 03MAR2010	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. GROSS 03MAR2010	PRODUCT SPEC	
		108-127005		CIRCUULAR HD RECEPTACLE WITH SOLDER CUP SOCKET CONTACTS, PANEL MOUNT 40 POS.
0 PLC ± - 2 PLC ± 0.20 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC		
MATERIAL	FINISH	WEIGHT	SIZE CAGE CODE DRAWING NO	
- 	- 	-	A100779  =2101677	
CUSTOMER DRAWING			SCALE	RESTRICTED TO
			NTS	SHEET 1 OF 1 REV C