


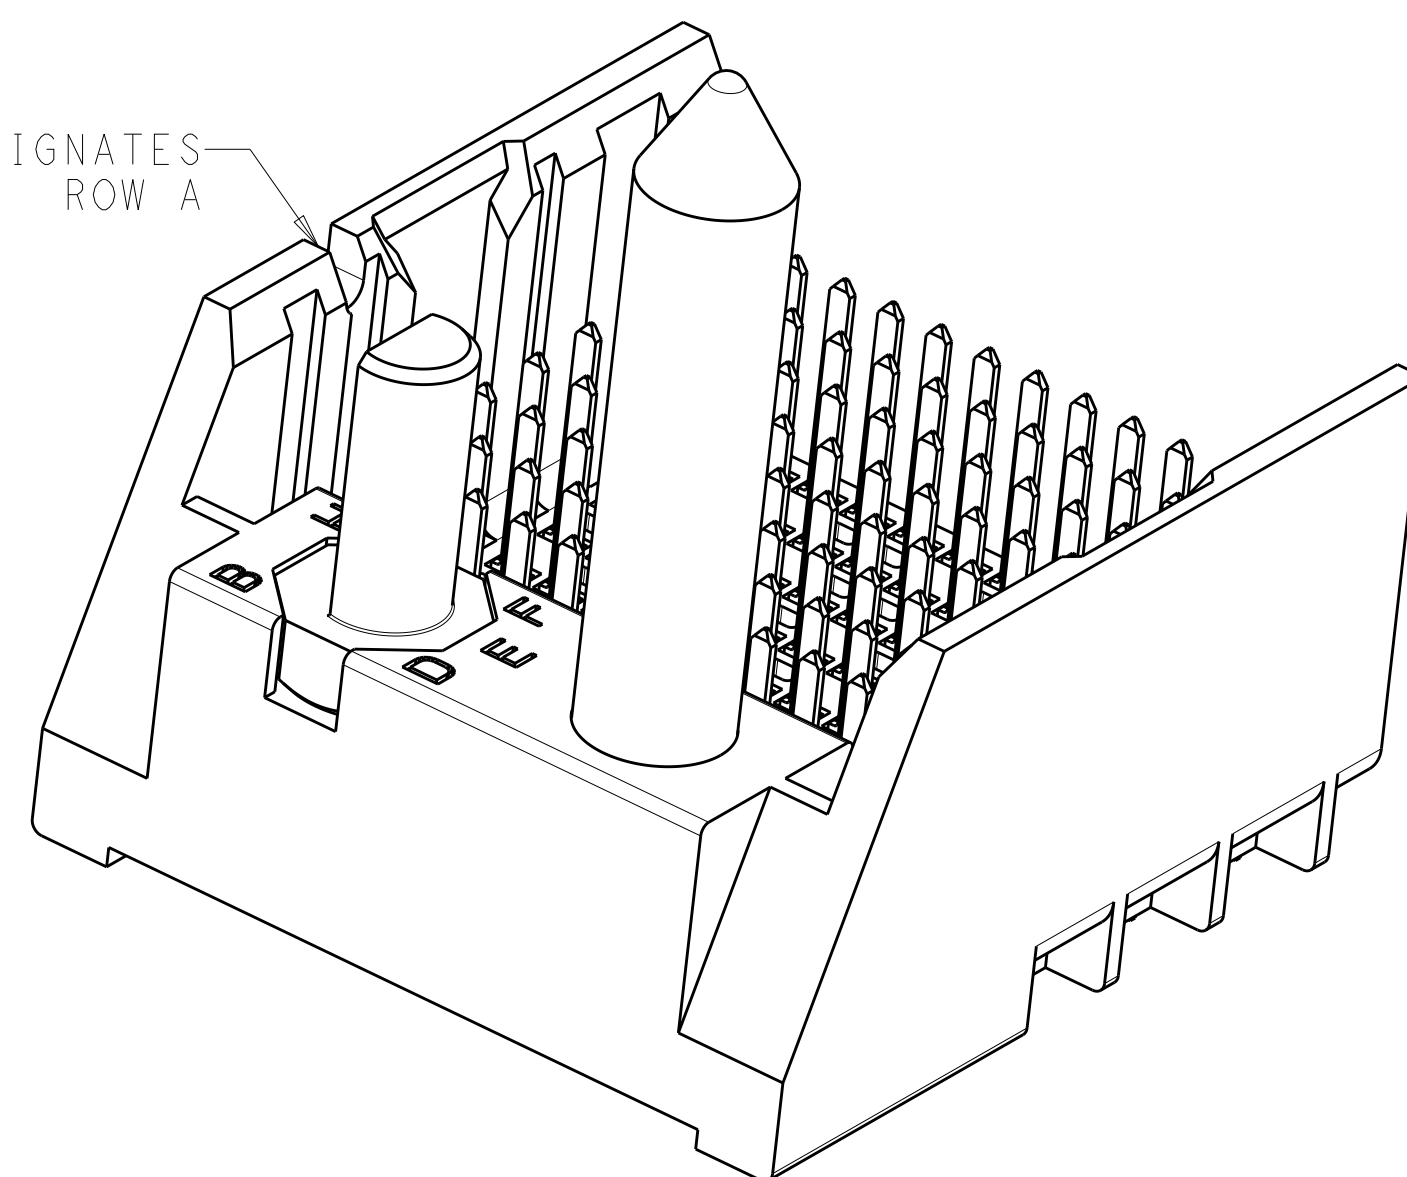


1	MATERIAL:	
	HOUSING: LCP, GLASS FILLED, UL94V-0.	
	TERMINALS: HIGH PERFORMANCE COPPER ALLOY.	

△2 FINISH:
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN
ON PCB TAILS, NICKEL OVERALL.



3. SCREWS PACKAGED IN END OF PACKAGING TUBE.

△ 4 FOR GROUNDED GUIDE PIN USE $\varnothing 3.56 \pm 0.08$ PTH,
 $\varnothing 3.66$ DRILL, AND $\varnothing 6.5$ PAD.

5. KEYING PIN SHOWN IN POSITION A, SEE KEYING CHART ON SHEET 2 FOR OTHER POSITIONS.

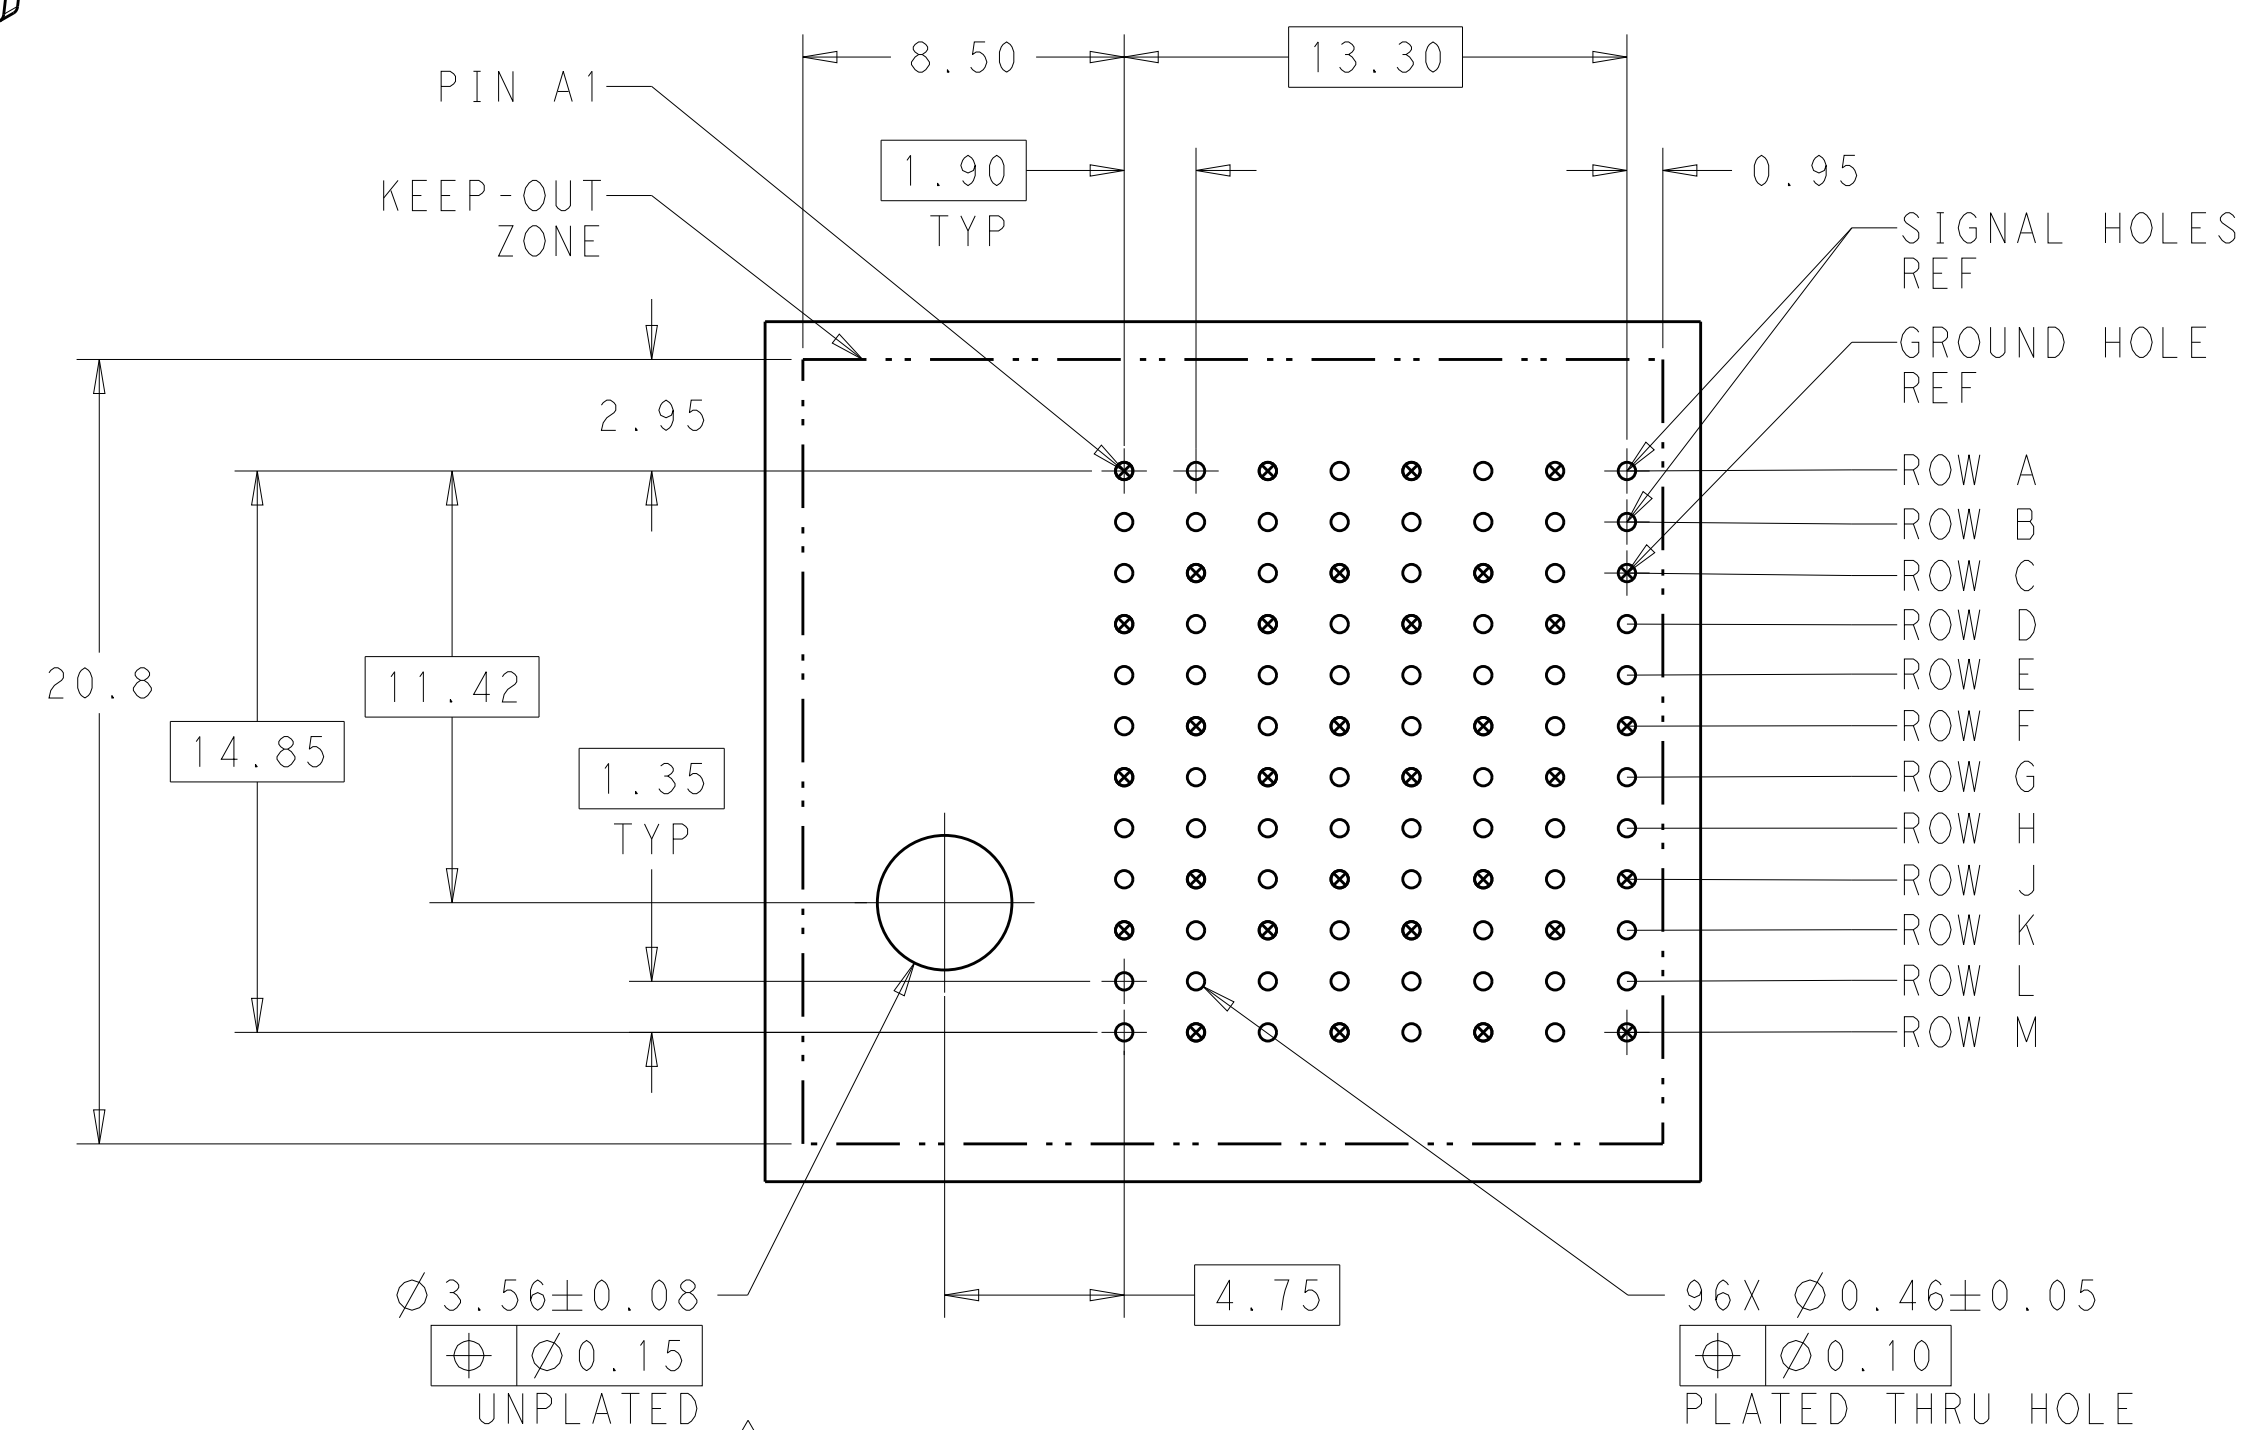

LEFT GUDIED
BACKPLANE HOLE PATTERN
(CONNECTOR SIDE)

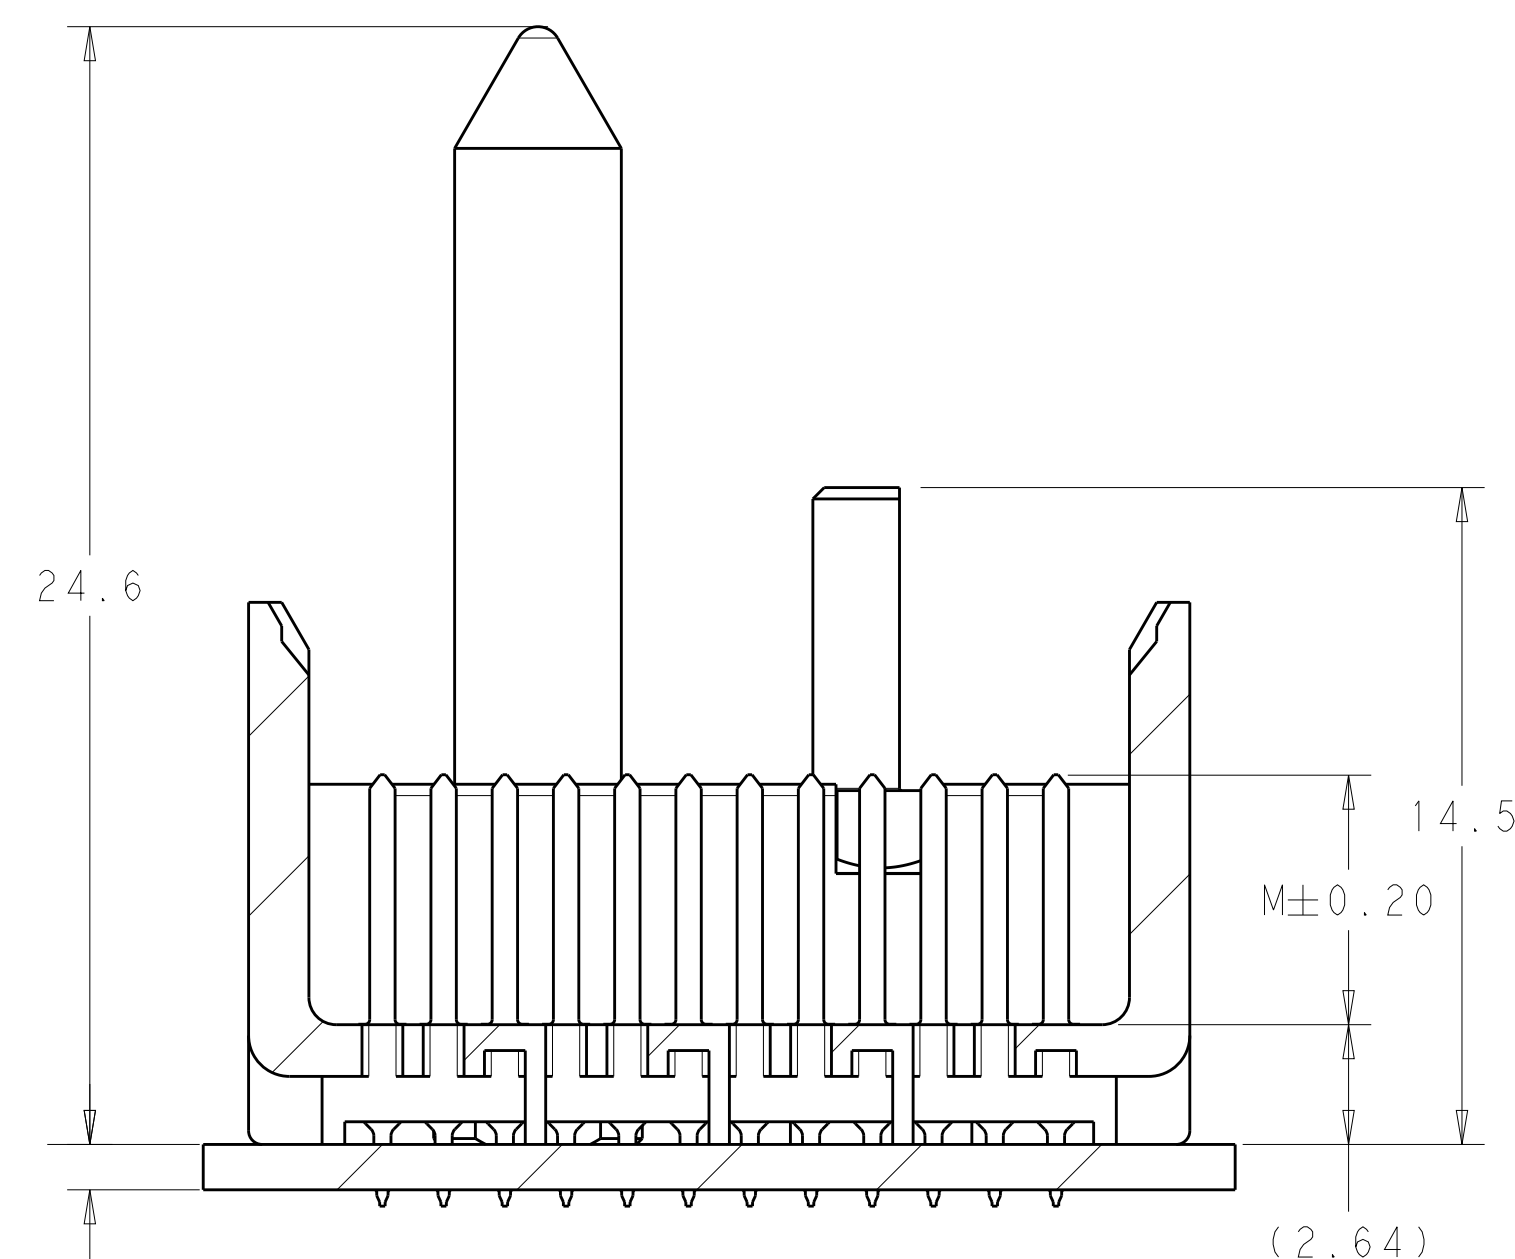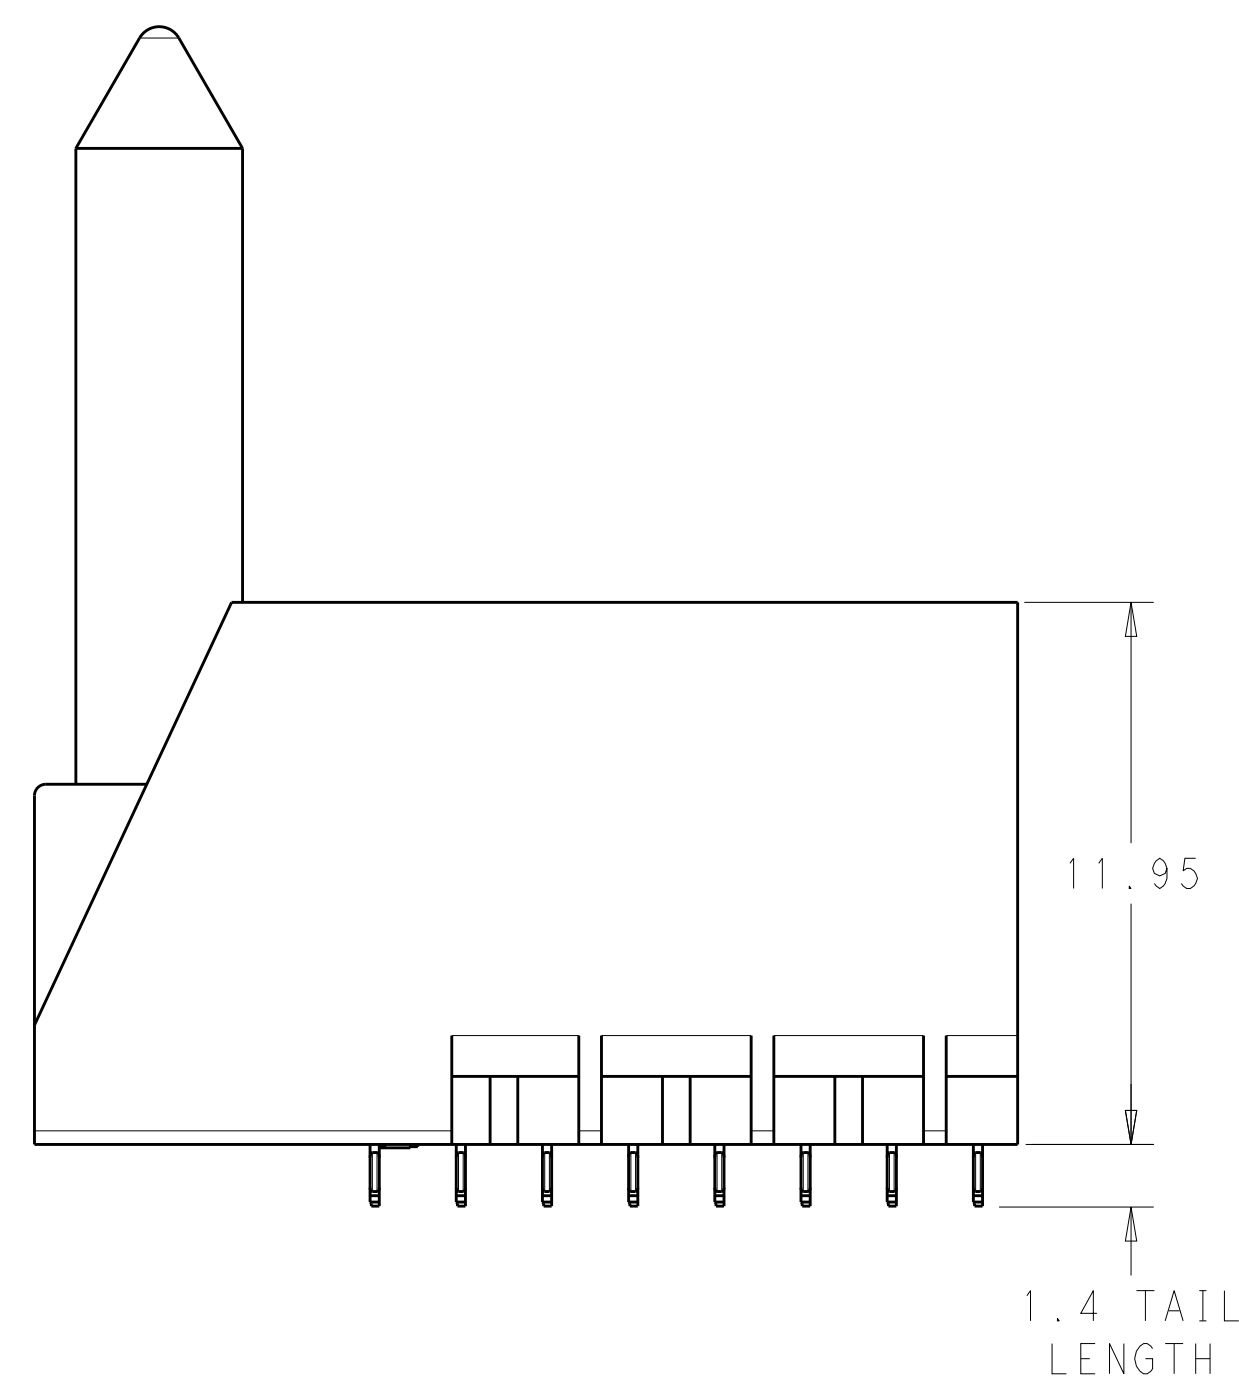

1.00
MINIMUM BOARD
THICKNESS

SECTION A - A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. K. SHOBER	18JUL2013		
		CHK EABY	18JUL2013		
DIMENSIONS:		APVD J. EABY	18JUL2013	NAME IMPACT, 4 PAIR, 8 COLUMN, HEADER LEFT GUIDED, OPEN END WALL SIGNAL MODULE, 0.46 PTH	
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC			
	0 PLC ±. 1 PLC ±0.25 2 PLC ±0.13 3 PLC ±. 4 PLC ±.	-			
	ANGLES	APPLICATION SPEC			
MATERIAL	FINISH	WEIGHT	SIZE		CAGE CODE
	SEE TABLE	-	A1		00779
		CUSTOMER DRAWING		DRAWING NO	RESTRICTED TO
				©=2057434	-
			SCALE	6:1	SHEET 1 of 2
			REV A		

REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN.	APVD.
	-	SEE SHEET 1	-	-	-

	H	5.5	8-2057434-3
	H	4.9	8-2057434-2
	H	4.5	8-2057434-1
	G	5.5	7-2057434-3
	G	4.9	7-2057434-2
	G	4.5	7-2057434-1
	F	5.5	6-2057434-3
	F	4.9	6-2057434-2
	F	4.5	6-2057434-1
	E	5.5	5-2057434-3
	E	4.9	5-2057434-2
	E	4.5	5-2057434-1
	D	5.5	4-2057434-3
	D	4.9	4-2057434-2
	D	4.5	4-2057434-1
	C	5.5	3-2057434-3
	C	4.9	3-2057434-2
	C	4.5	3-2057434-1
	B	5.5	2-2057434-3
	B	4.9	2-2057434-2
	B	4.5	2-2057434-1
	A	5.5	1-2057434-3
	A	4.9	1-2057434-2
	A	4.5	1-2057434-1
	-	5.5	2057434-3
	-	4.9	2057434-2
	-	4.5	2057434-1
FINISH	KEY POSITION	DIM M	PART NUMBER

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY

KEY POSITION
CHART

NONE

A

E

B

F

C

G

D

H