

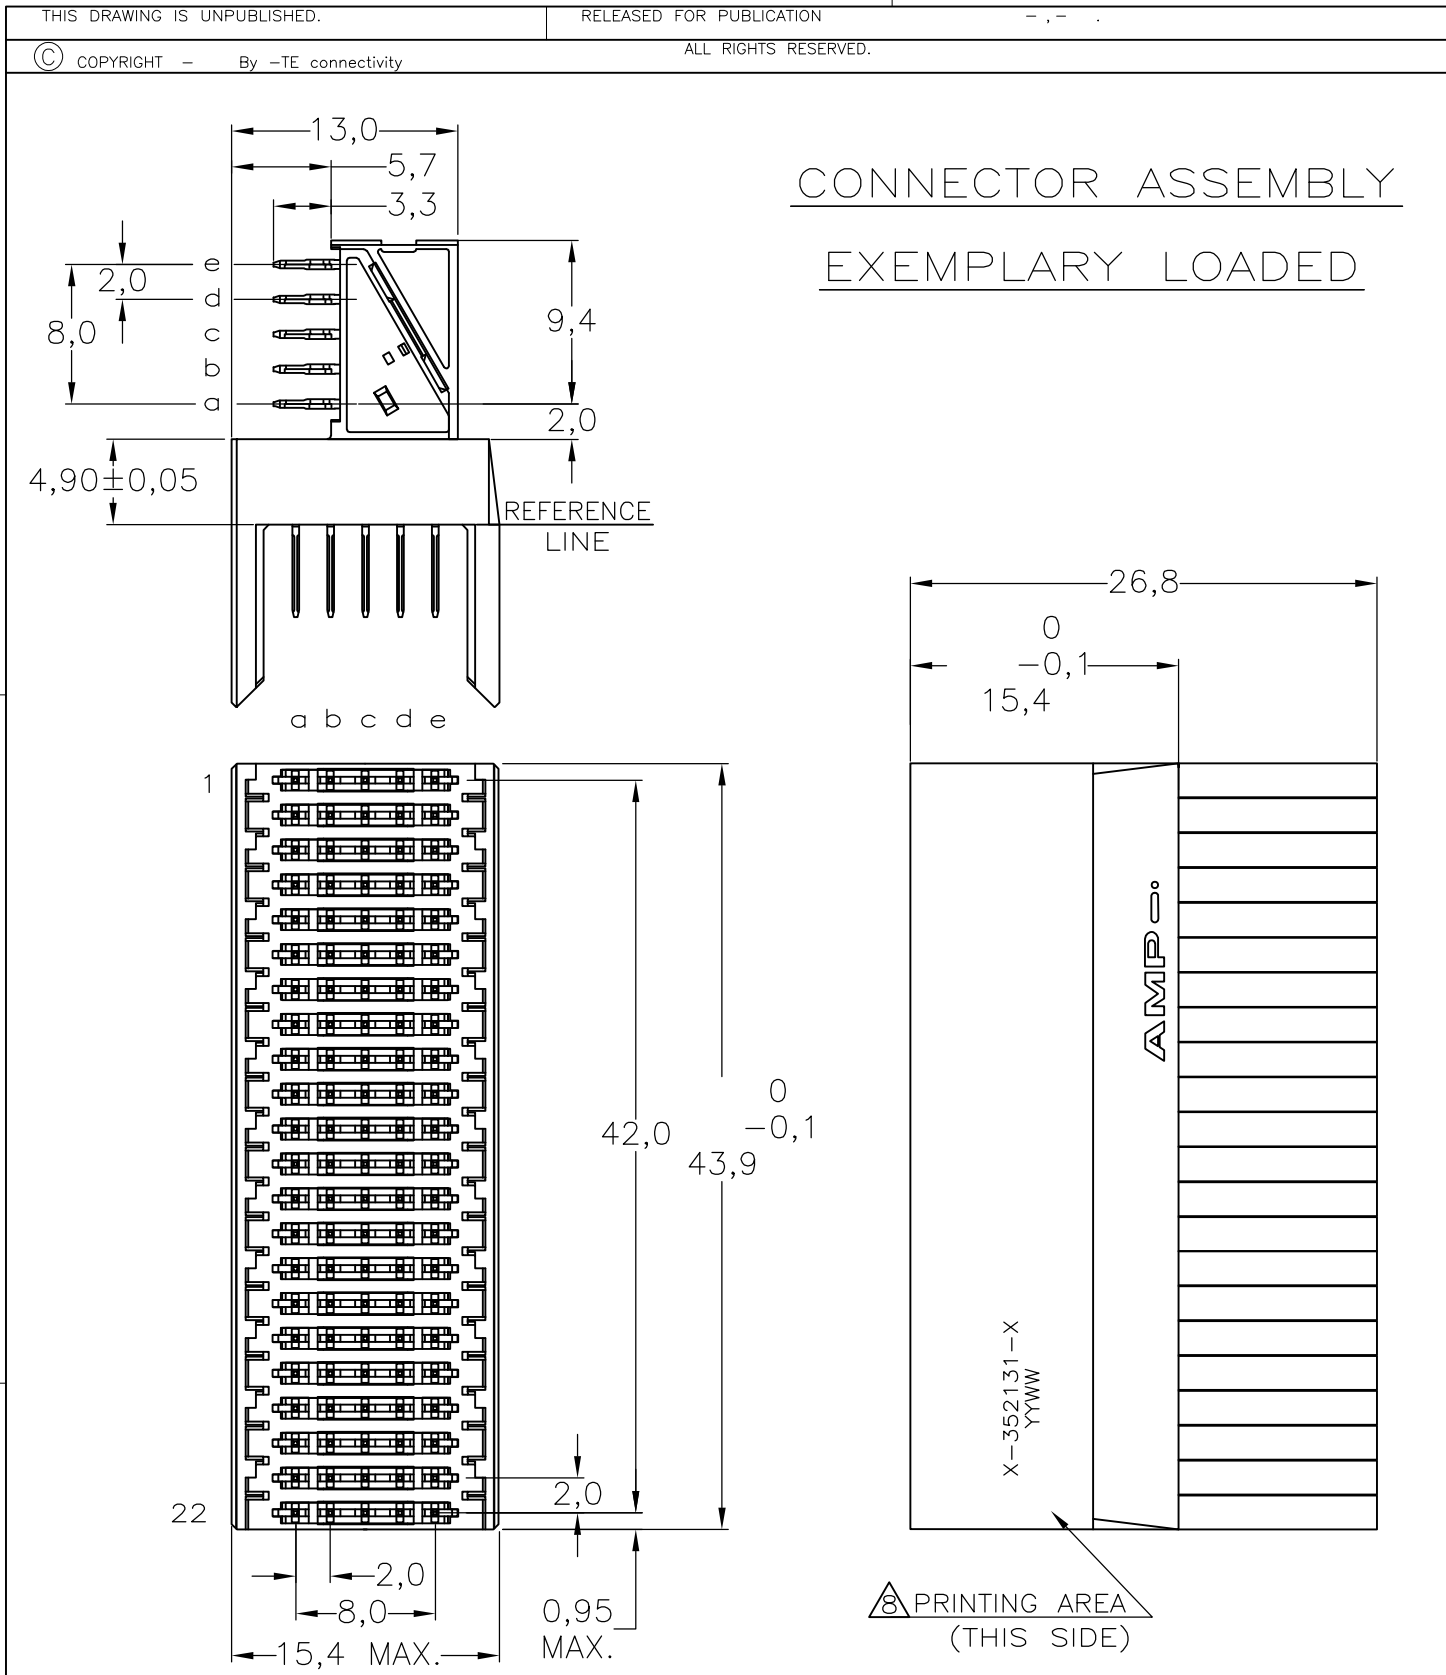


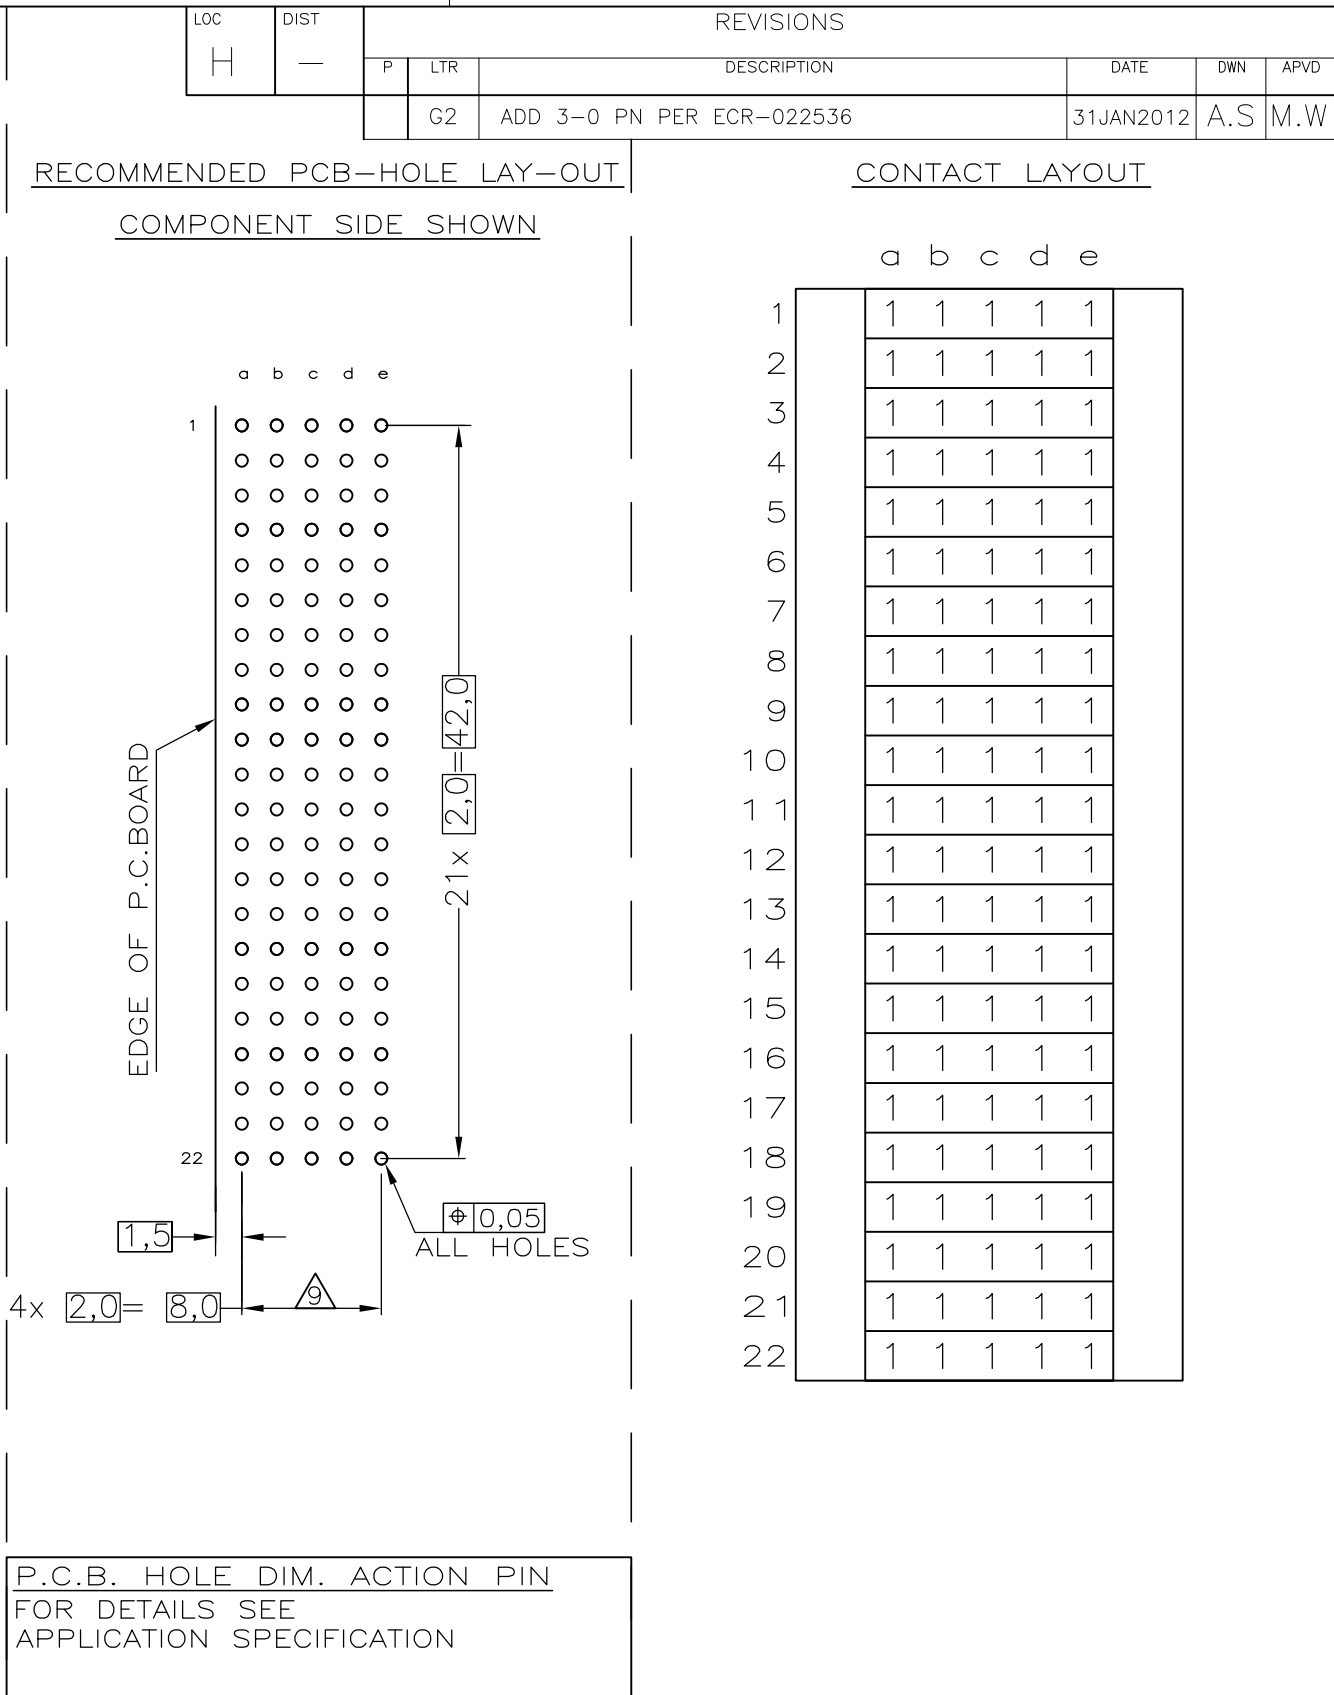

NOTES:

- 1 MATERIAL HOUSING: GREY GLASSFILLED POLYESTER
UL 94 V-0
CONTACT: PHOSPHOR BRONZE
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.
AND ACTION PIN: 0,5µm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- 4 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
- 5 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III,
CENTRAL OFFICE APPLICATIONS.
- 6 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III,
UNCONTROLLED ENVIRONMENT APPLICATIONS.
- 7 CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
- 8 CONNECTOR MARKED WITH PARTNUMBER AND DATECODE
- 9 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
- 11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 12 0.76µm MIN GOLD PLATING AT MATING AREA.

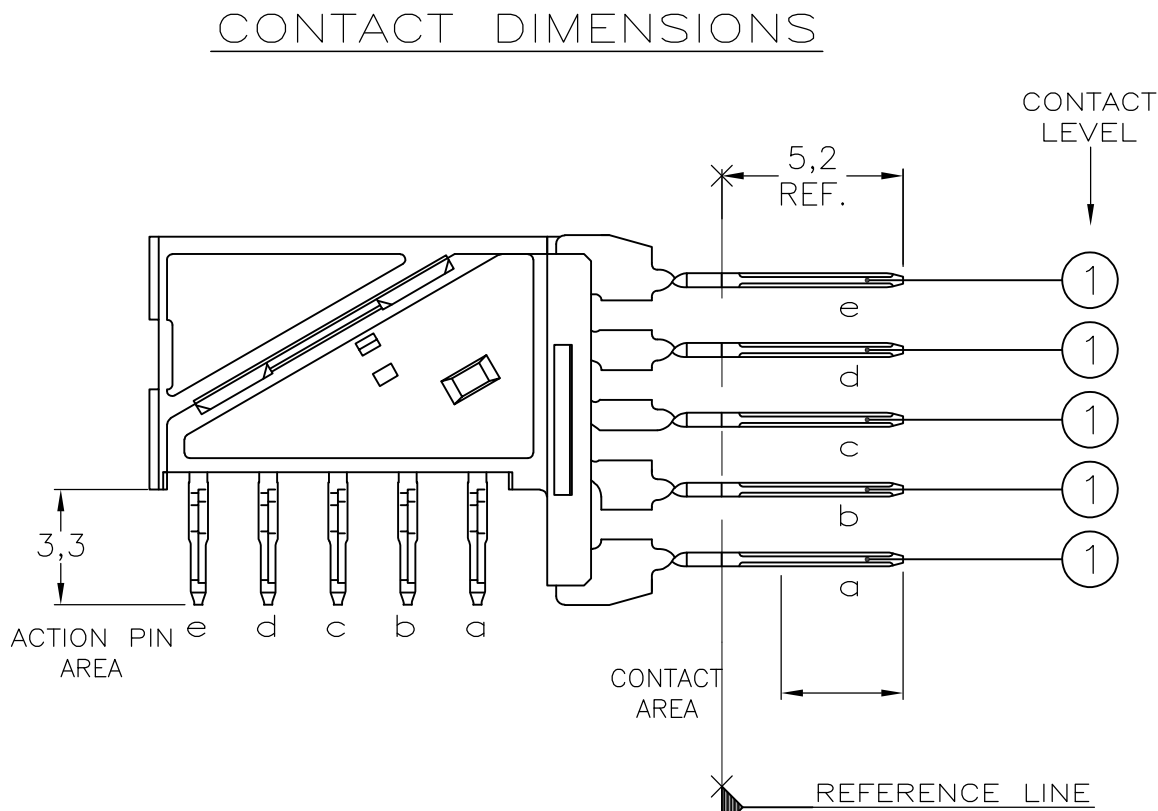

1 OBSOLETE	N	2 3 1	2 3 1	3-352131-0
	Y	2 6 6	2 6 6	1-352131-9
	Y	2 6 6	2 6 6	352131-9
	N	2 4 4	2 4 4	352131-4
	N	2 3 3	2 3 3	352131-1
	CONSERVATION TREATMENT	CONTACT FINISH	PARTNUMBER	
15DEC97		TE TE Connectivity		
15DEC97				
JREN		Z-PACK 2MM HM TYPE B22 110 POS. RIGHT ANGLE MALE CONNECTOR ASSEMBLY		
-				
NINGSBRUGGE				
PEC				
N SPEC		NAME		
- 19029		SIZE		
-		CAGE CODE		
		DRAWING NO		
		RESTRICTED TO		
		A2		
		00779		
		C-352131		
		-		