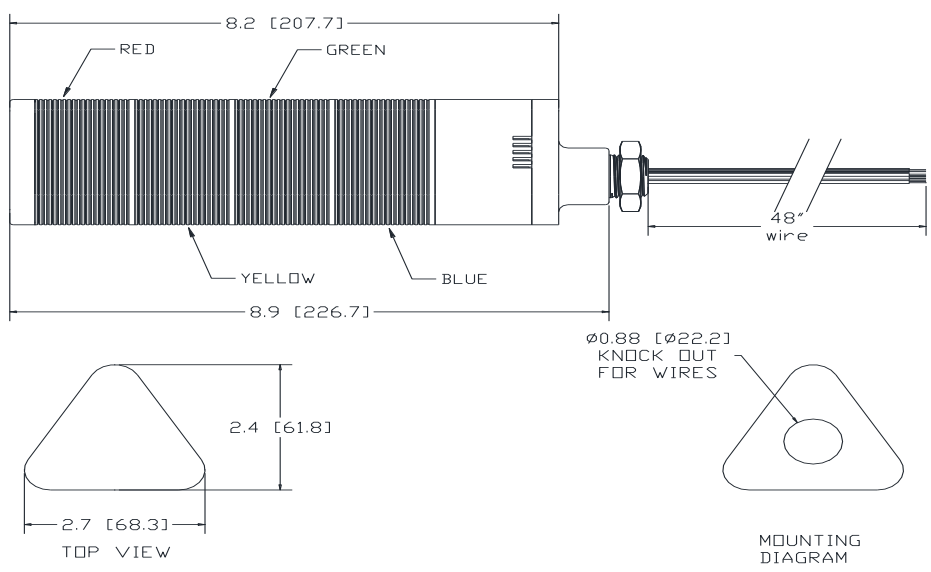


Mallory			Mallory Sonalert Products, Inc.			Part #: JT028-RYGB-CDL		
Sales Outline Drawing					Revision: C			
Specifications:								
Stack Number:	1	2	3	4				
LED Color:	RED	YELLOW	GREEN	BLUE				
Connection Wires:	Red and Brown	Yellow and Brown	Green and Brown	Blue and Brown				
LED Current Draw:	<50 mA	<60 mA	<40 mA	<50 mA				
Rated Voltage:	24 VAC/DC							
Operating Voltage:	20-28 VAC/DC							
Sound Level Category:	Loud	Loud	Loud	Loud				
Mode of Operation:	Continuous	Medium Pulse (5PPS)	Double Pulse (0.5PPS)	Continuous for 5 sec then 0.1s beep until reset				
Connection:	Black and Gray Wires	Black and Gray Wires; Orange wire connected to	Black and Gray Wires; Purple wire connected to Green/Yellow wire	Black and Gray wires; Orange and Purple wires connected to Green/Yellow wire				
Sound Current Draw:	40mA Max.	40mA Max.	40mA Max.	40mA Max.				
Loudness @ 1m:	80-85 dB(A) Typ.							
Frequency:	2000 ± 500 Hz							
Total Max Current:	<240mA with all LED's and sound unit working							
Operating Temperature:	-25° ~ +60°C							
Lens Color:	Opaque White							
Material:	ABS FR15U							
Mounting Method:	Direct Mount using 1/2" NPT Stainless Steel Pipe and Nut							
Weight Typical (g):	410							
NEMA 12:	Approved							
Options:	Please contact factory.							
Dimensions:			cUL Recognized			ROHS Compliant		
Inches (mm)			PATENT NUMBER 10309594					
								
LED OPERATION:		CONNECT STACK COLOR WIRE TO POWER AND BROWN WIRE TO POWER.						
SOUND OPERATION:		CONNECT GRAY AND BLACK WIRES TO POWER FOR CONTINUOUS SOUND. FOR MEDIUM PULSE, CONNECT GRAY & BLACK TO POWER AND ORANGE WIRE TO GREEN/YELLOW WIRE. FOR DOUBLE PULSE, CONNECT GRAY & BLACK TO POWER AND PURPLE WIRE TO GREEN/YELLOW WIRE. FOR CONT/BEEP, CONNECT GRAY & BLACK TO POWER AND ORANGE & PURPLE TO GREEN/YELLOW WIRE.						