

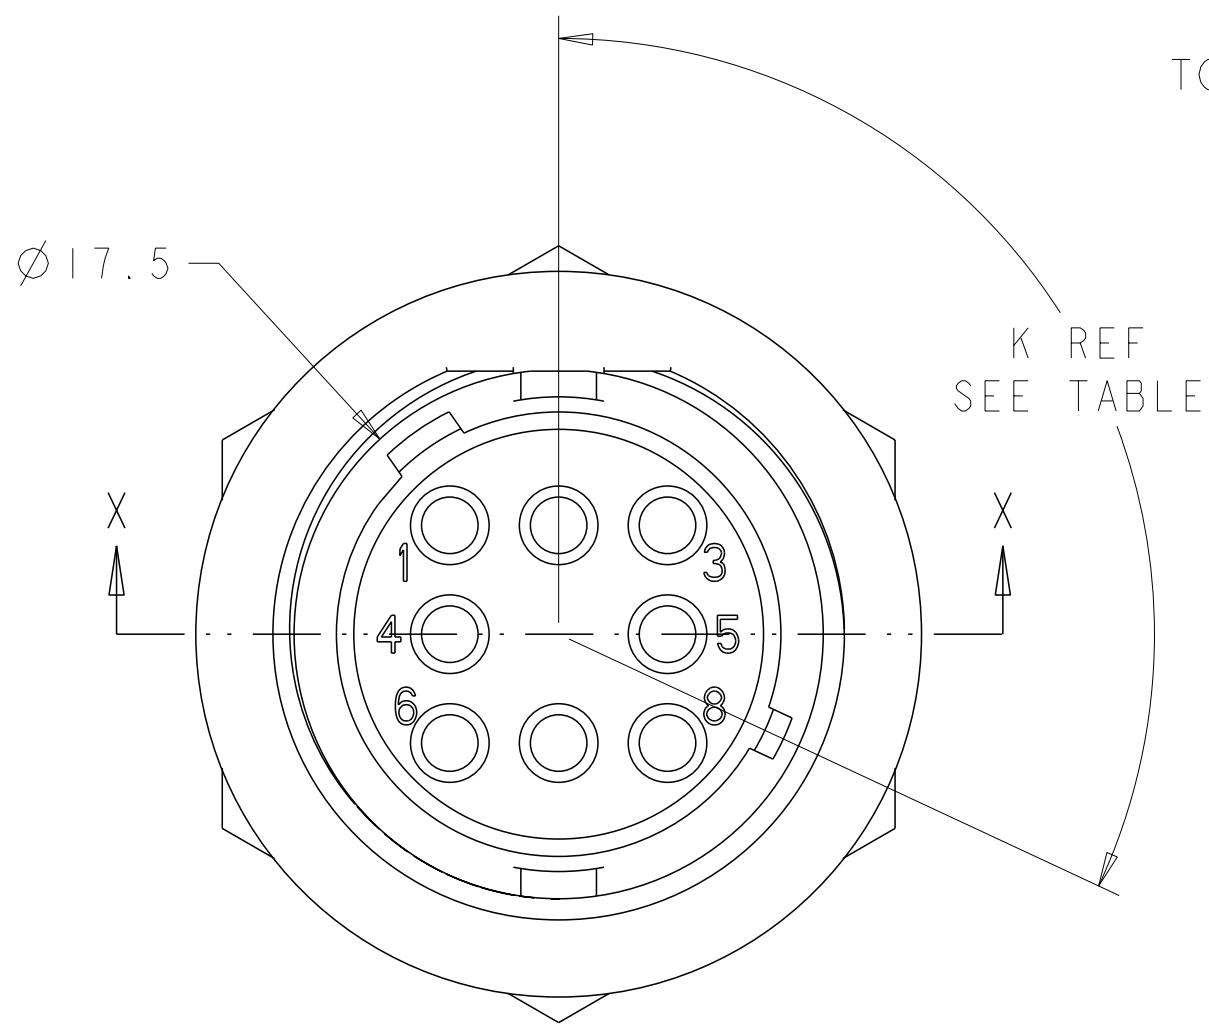
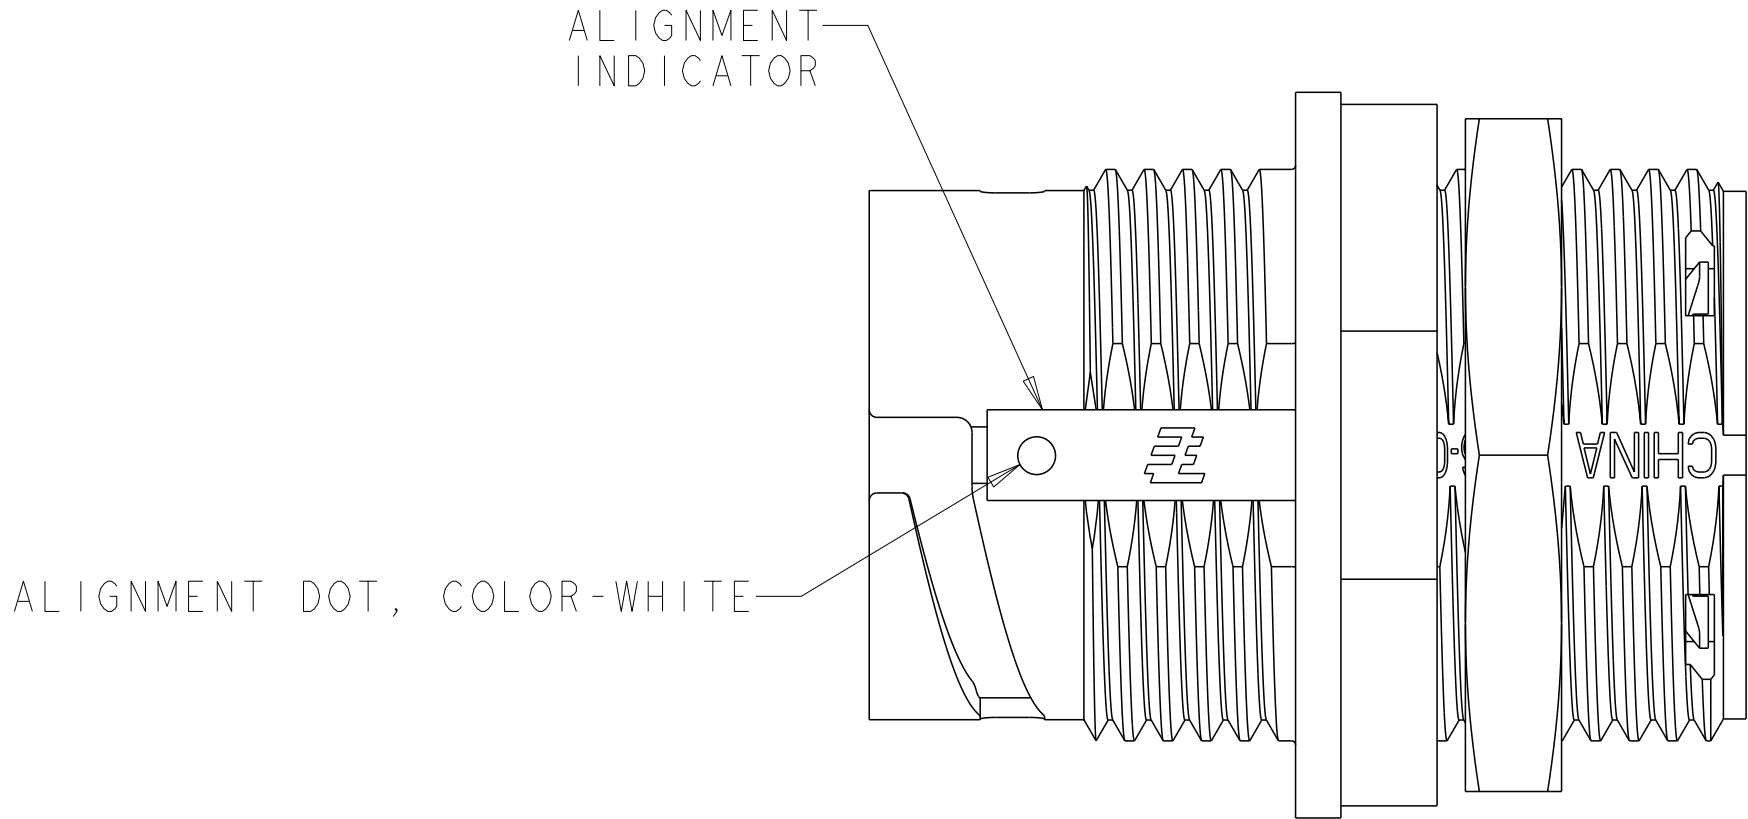


REVISIONS					
#	LYR	DESCRIPTION	DATE	DWN	APVD
	B2	REVISED PER ECO-15-010004	13JUL2015	NK	MZ
	C	REVISED PER ECO-17-004650	06APR2017	BDA	MZ

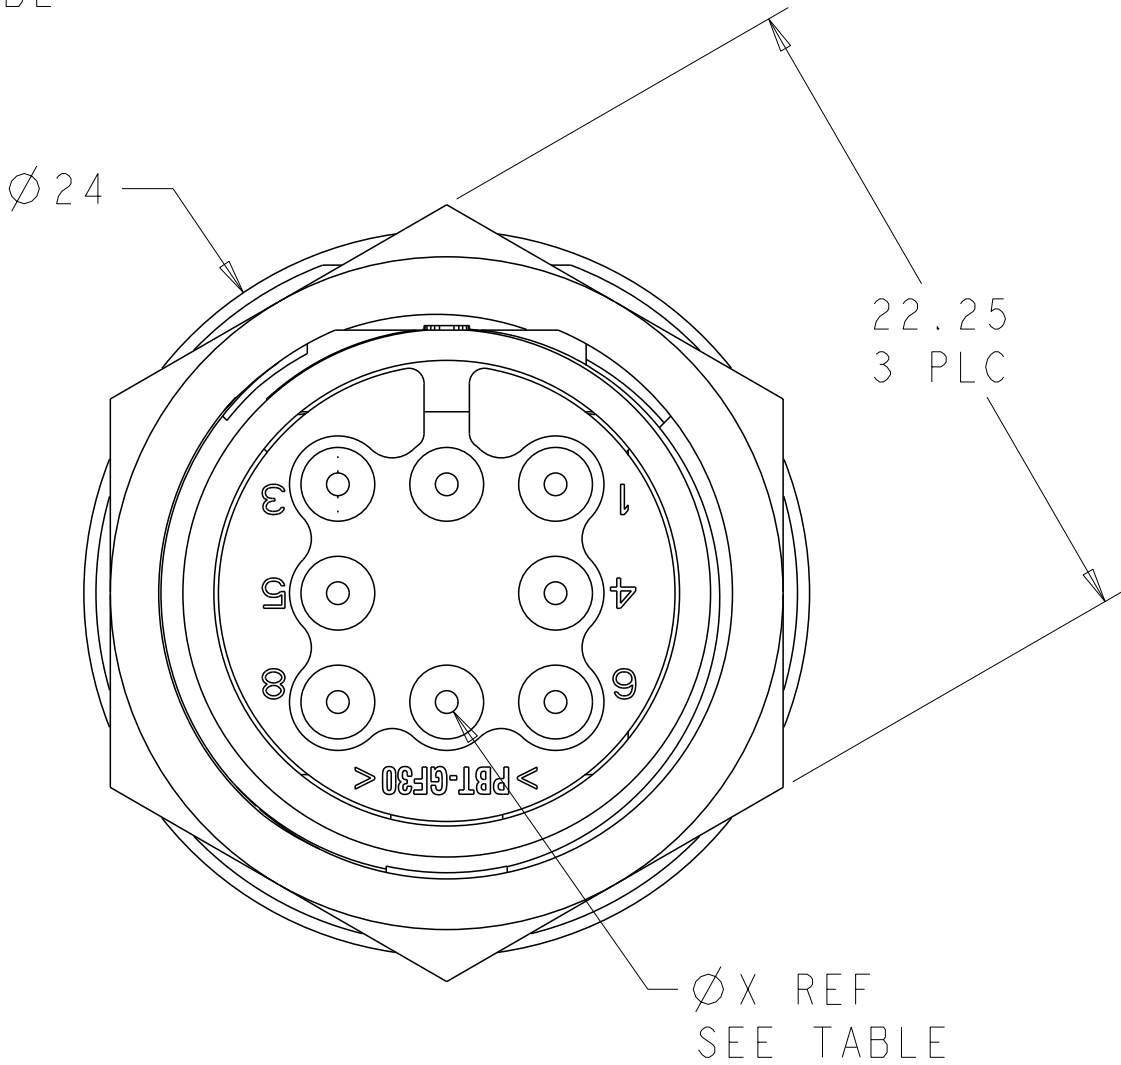


SEAL, PANEL, SHOWN FOR REFERENCE ONLY, TO BE ORDERED SEPARATELY, PART # 1445420-02


NUT, JAM; SHOWN FOR REFERENCE ONLY, TO BE ORDERED SEPARATELY, PART # 1445904-1

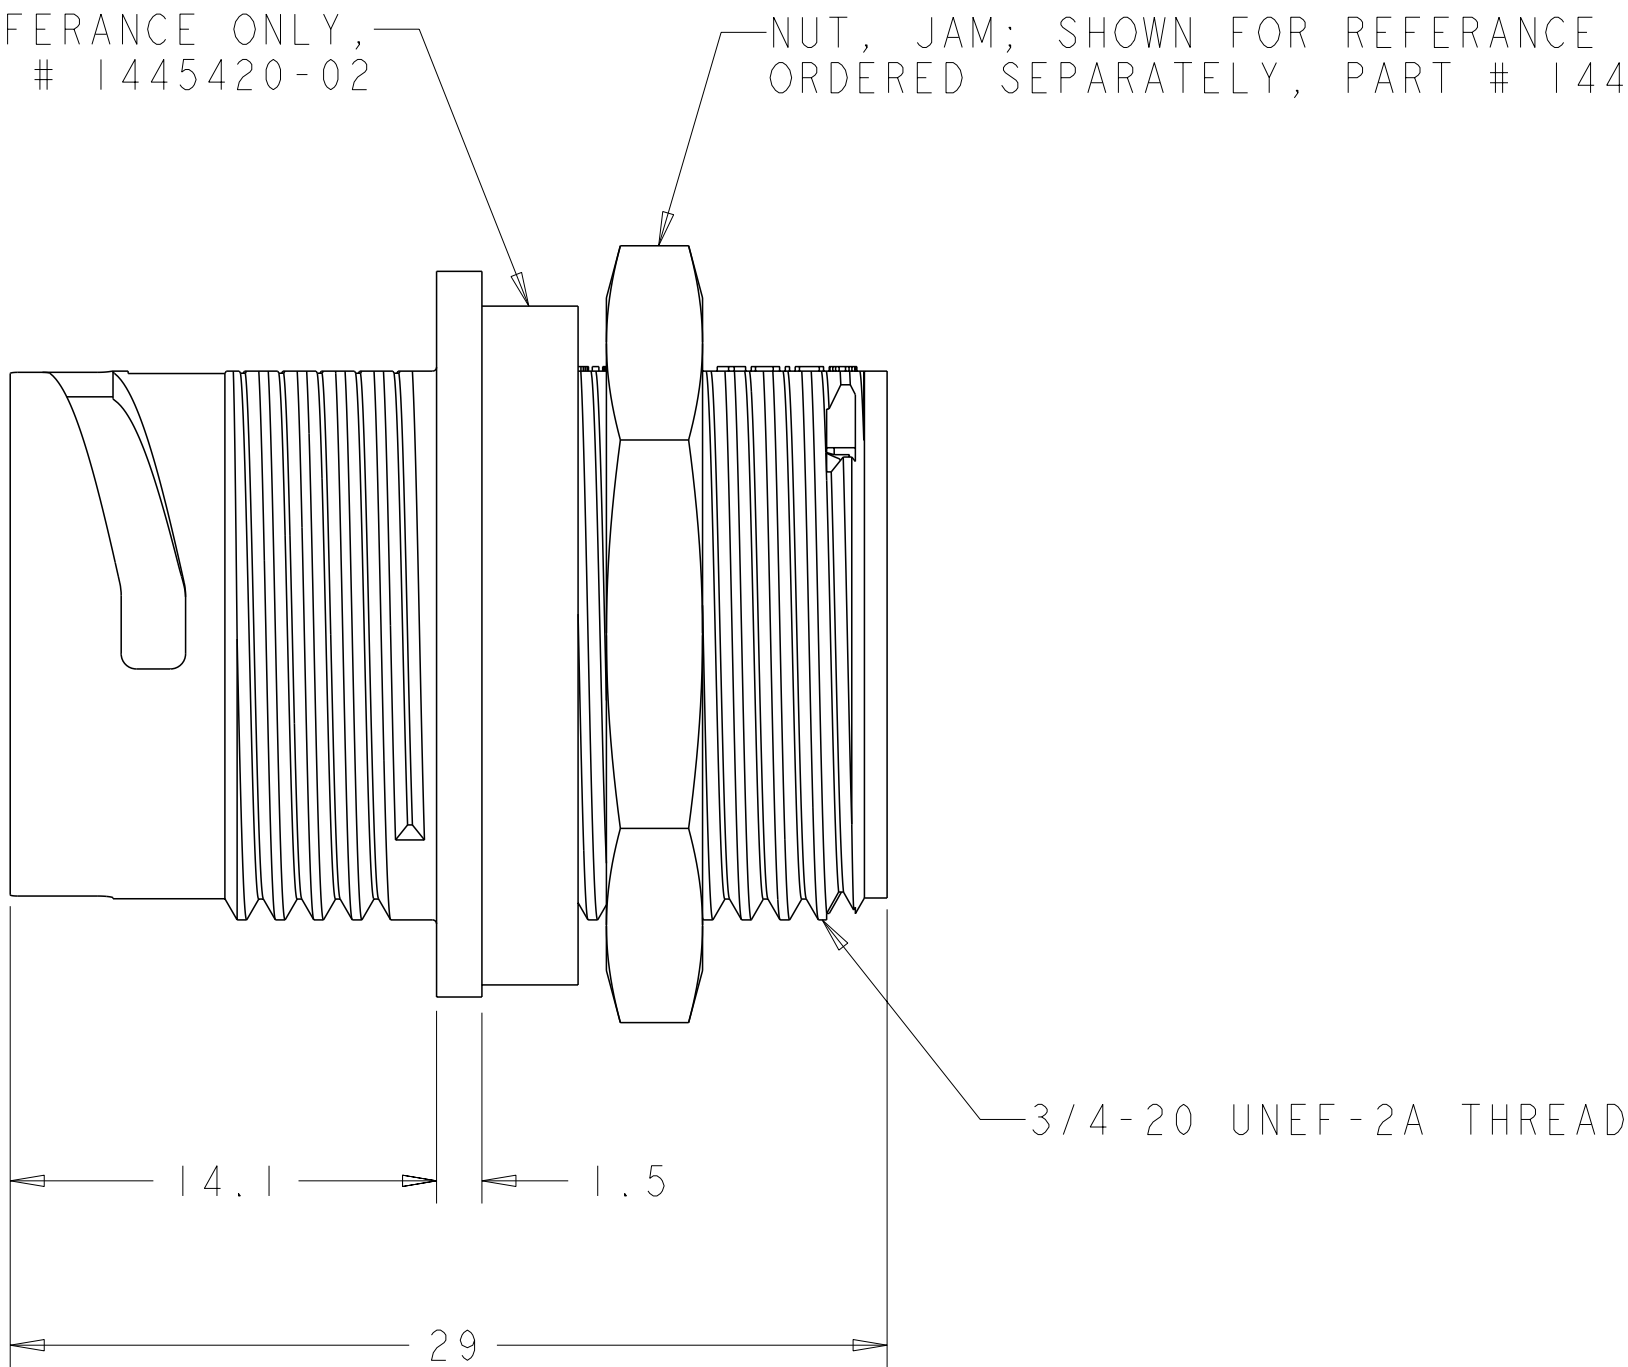

SEAL, PERIPHERAL, 1 REQD.
MATERIAL: ELASTOMER, COLOR-GRAY

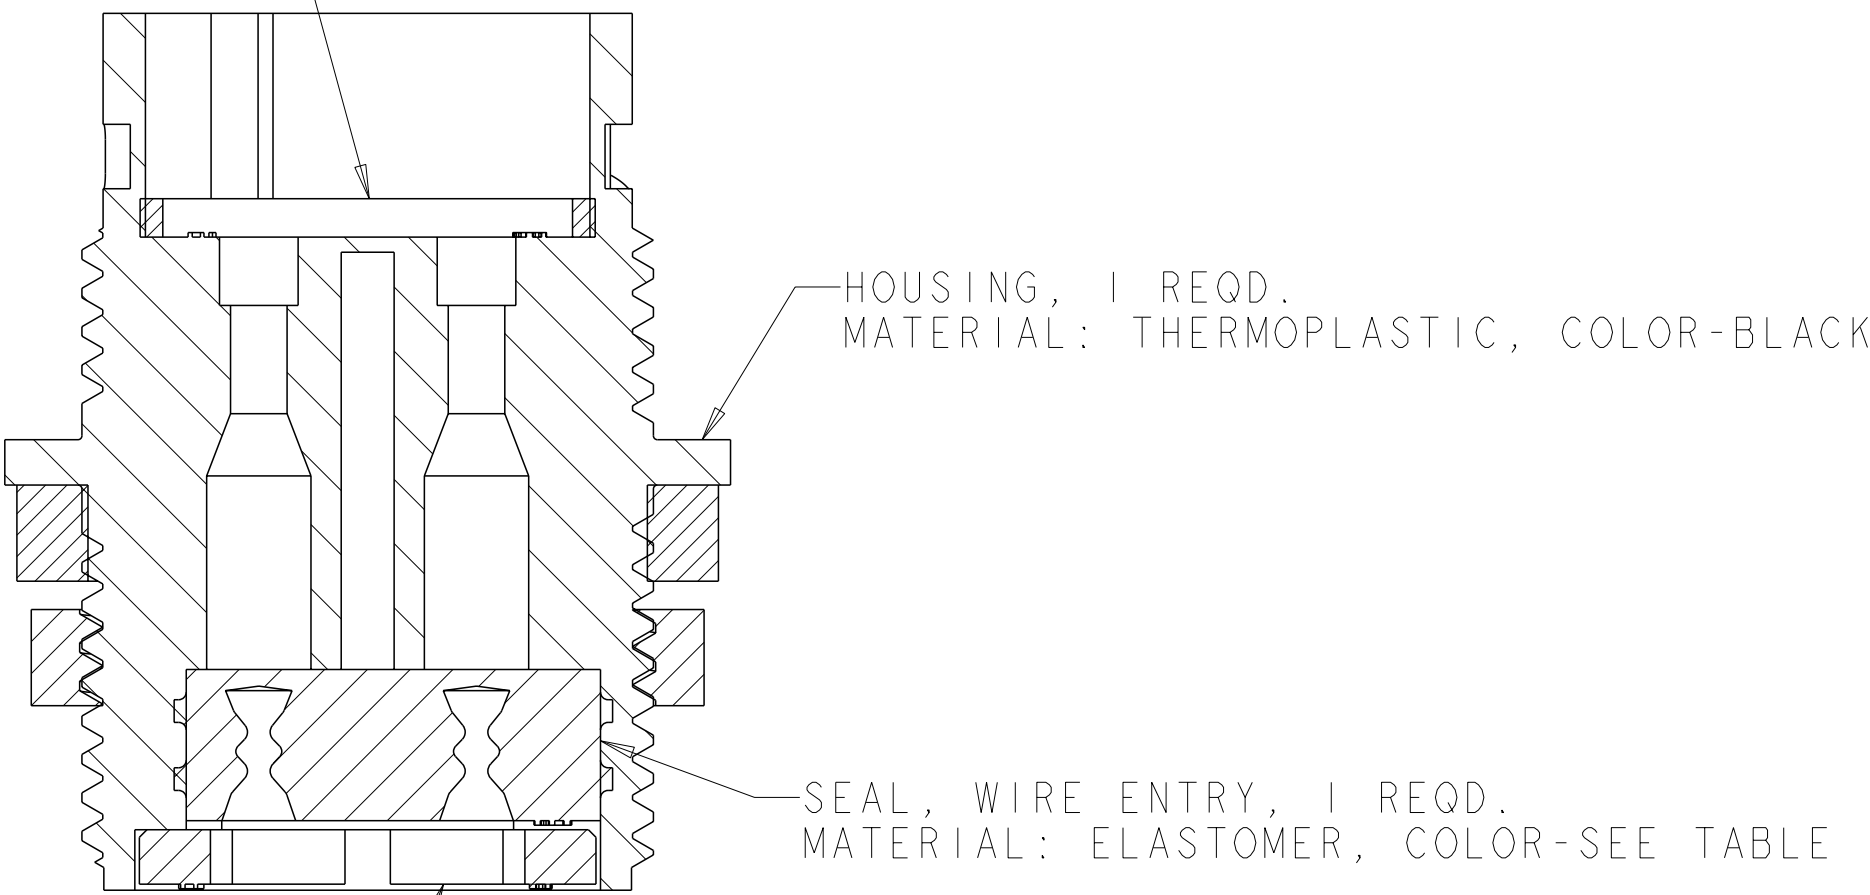

SECTION X-X

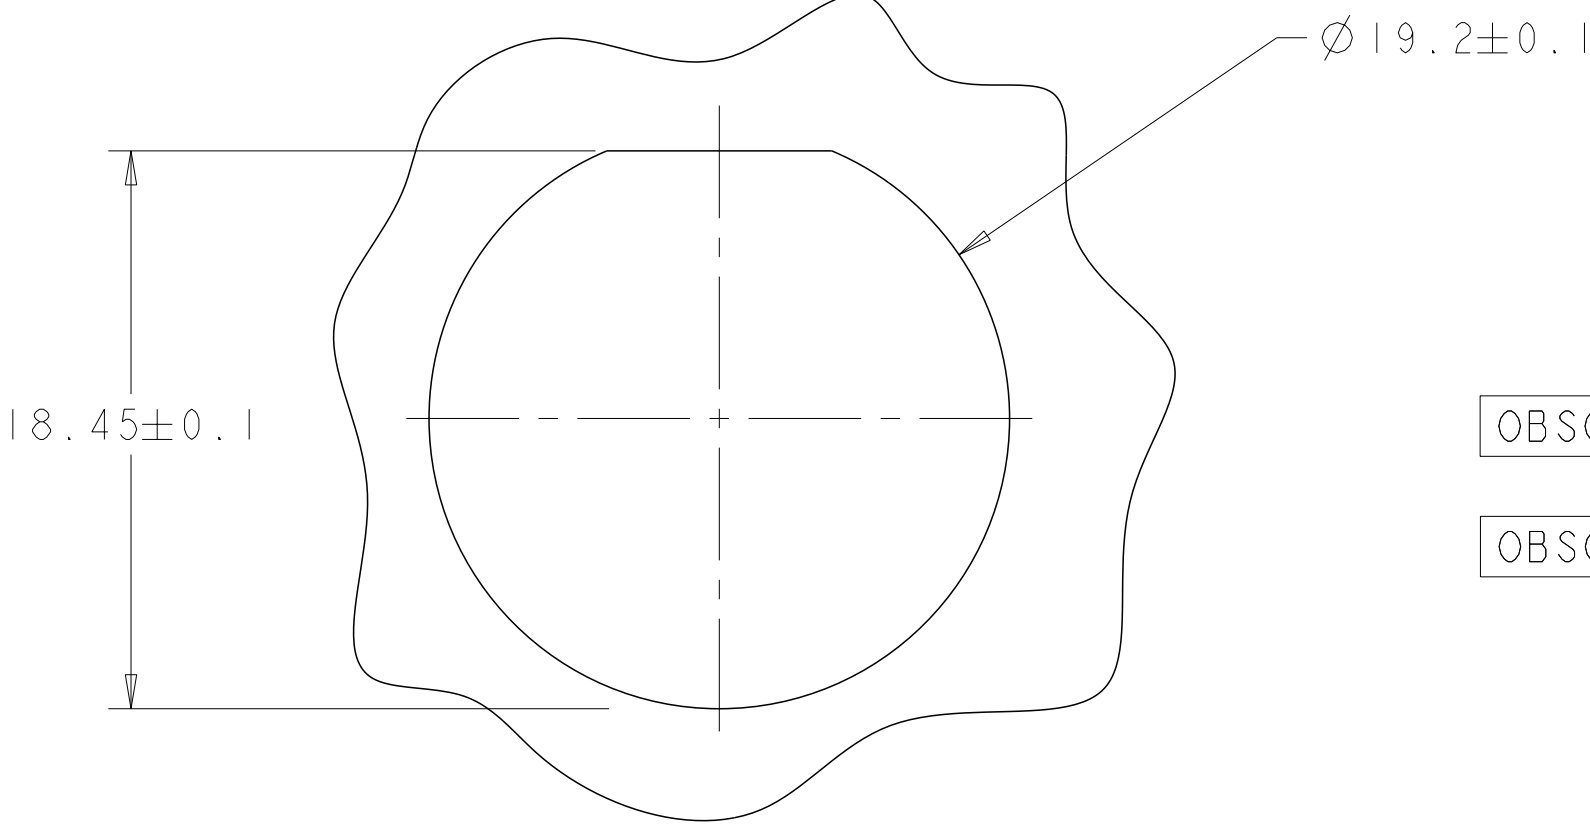

SUGGESTED PANEL CUTOUT

1. CONNECTOR CAN BE FRONT OR REAR PANEL MOUNTED.
- MAX PANEL THICKNESS - 3.18

OBSOLETE	YELLOW	Ø0.75	135°	1445821-04
	NATURAL	Ø1.5	115°	1445821-03
OBSOLETE	NATURAL	Ø1.5	135°	1445821-02
	YELLOW	Ø0.75	115°	1445821-01
	SEAL, WIRE ENTRY COLOR	ØX REF	K REF	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SHANE WIESE 12OCT2001	TE Connectivity	
DIMENSIONS:		CHK G. DOUTY 12OCT2001		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD H. WAKEEM 13JUN2003	NAME ASSEMBLY, RECEPTACLE, SIZE 11, 8 POSITION, PANEL MOUNT, SEALED, MINI CPC	
	0 PLC ±	PRODUCT SPEC	SIZE CAGE CODE DRAWING NO	
	1 PLC ±	APPLICATION SPEC	A100779C=1445821	
MATERIAL SEE CALLOUT	2 PLC ±0.13	WEIGHT -	RESTRICTED TO	
	3 PLC ±	CUSTOMER DRAWING	SCALE 4:1	SHEET 1 OF 1
	4 PLC ±			REV C
	ANGLES FINISH			