







Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

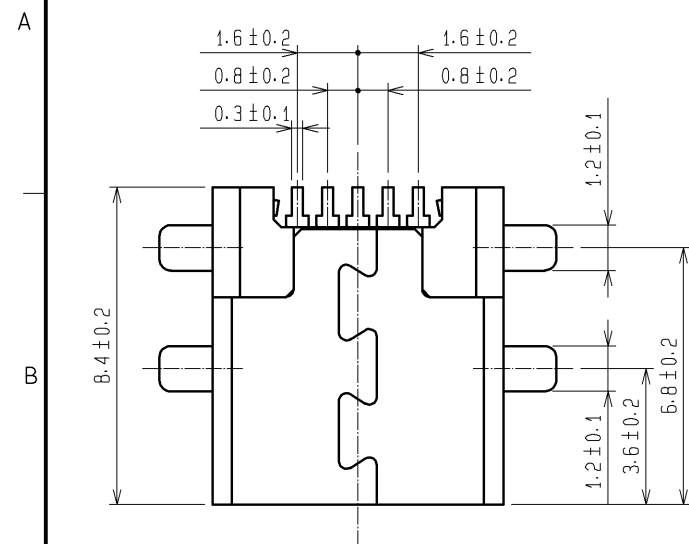

MATING FIGURE

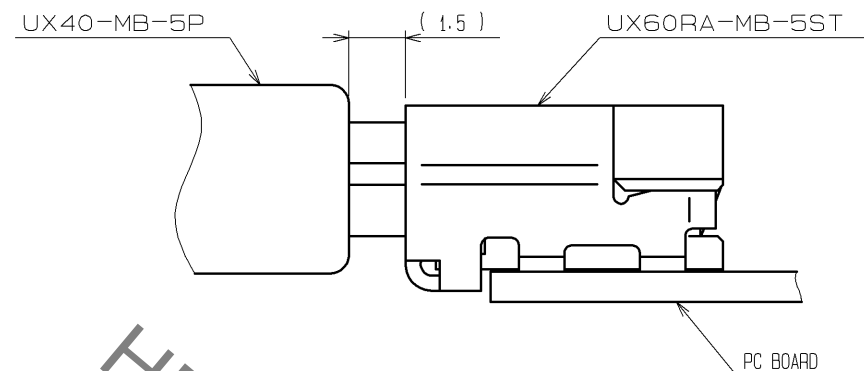



RECOMMENDED PCB PATTERN

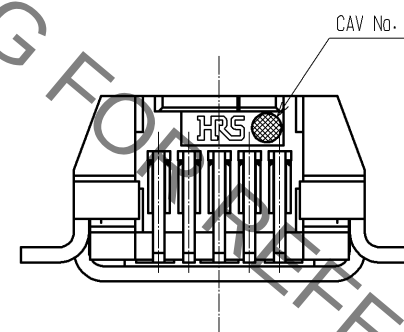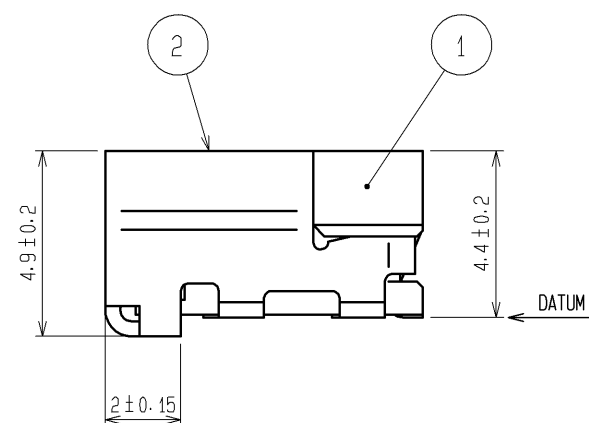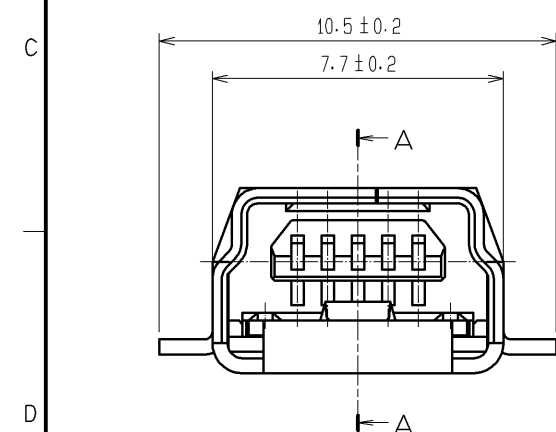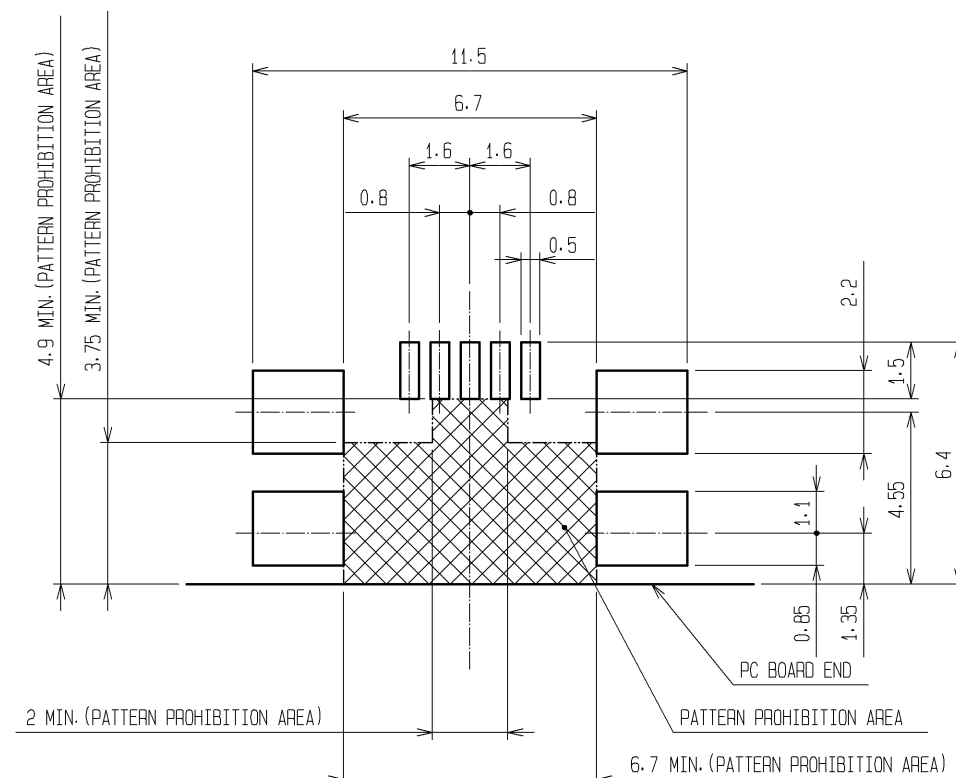

- NOTES 1. INTERFACE DIMENSIONS CONFORM TO USB2.0 STANDARDS.
2. ALL 9 LEADS(5 PINS + 4 METAL FITTINGS)SMT AND CO-PLANARITY SHALL BE AS FOLLOWS.

SMT AGAINST DATUM	CO-PLANARITY
0±0.075	WITHIN 0.1

3. PER REEL:900 PIECES.

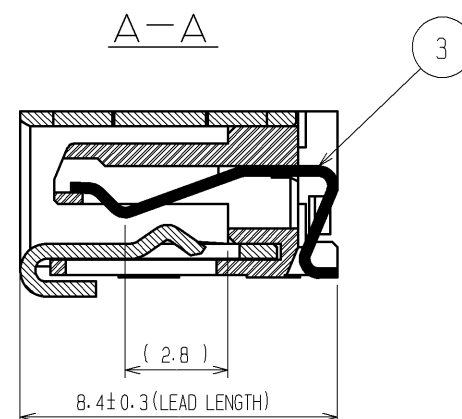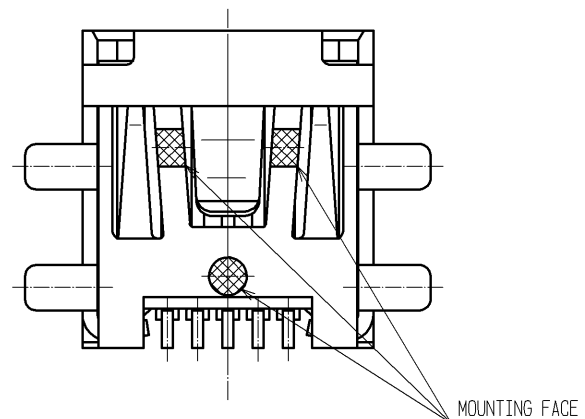


2	BRASS	NICKEL PLATED 1 μm + TIN PLATED 2 μm	1	5	PE	△	
1	POLYAMIDE	BLACK UL94V-0		4	PS		
NO.	MATERIAL	FINISH, REMARKS	NO.	3	PHOSPHOR BRONZE		CONTACT AREA:NICKEL PLATED 1.25 μm + GOLD PLATED 0.75 μm MOUNTING AREA:NICKEL PLATED 1.25 μm + TIN-COPPER PLATED 1 μm OTHERS AREA:NICKEL PLATED 1.25 μm
UNITS mm	⊙	SCALE 5 : 1	COUNT 3	DESCRIPTION OF REVISIONS DIS-E-003848	DESIGNED TA. TORIHARA	CHECKED RI. TAKAYASU	DATE 11.07.15
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : A0. SUZUKI	05.01.05	DRAWING NO. EDC3-124218-00			
		CHECKED : MR. NAKAMURA	05.01.05	PART NO. UX60RA-MB-5ST			
		DESIGNED : HK. TANAKA	05.01.05	CODE NO. CL240-0007-5-00			
		DRAWN : HK. TANAKA	05.01.05	1/2			

Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.





△ DRAWING FOR PACKING

UNREELING DIRECTION →

PACKAGING CONDITION(FREE)

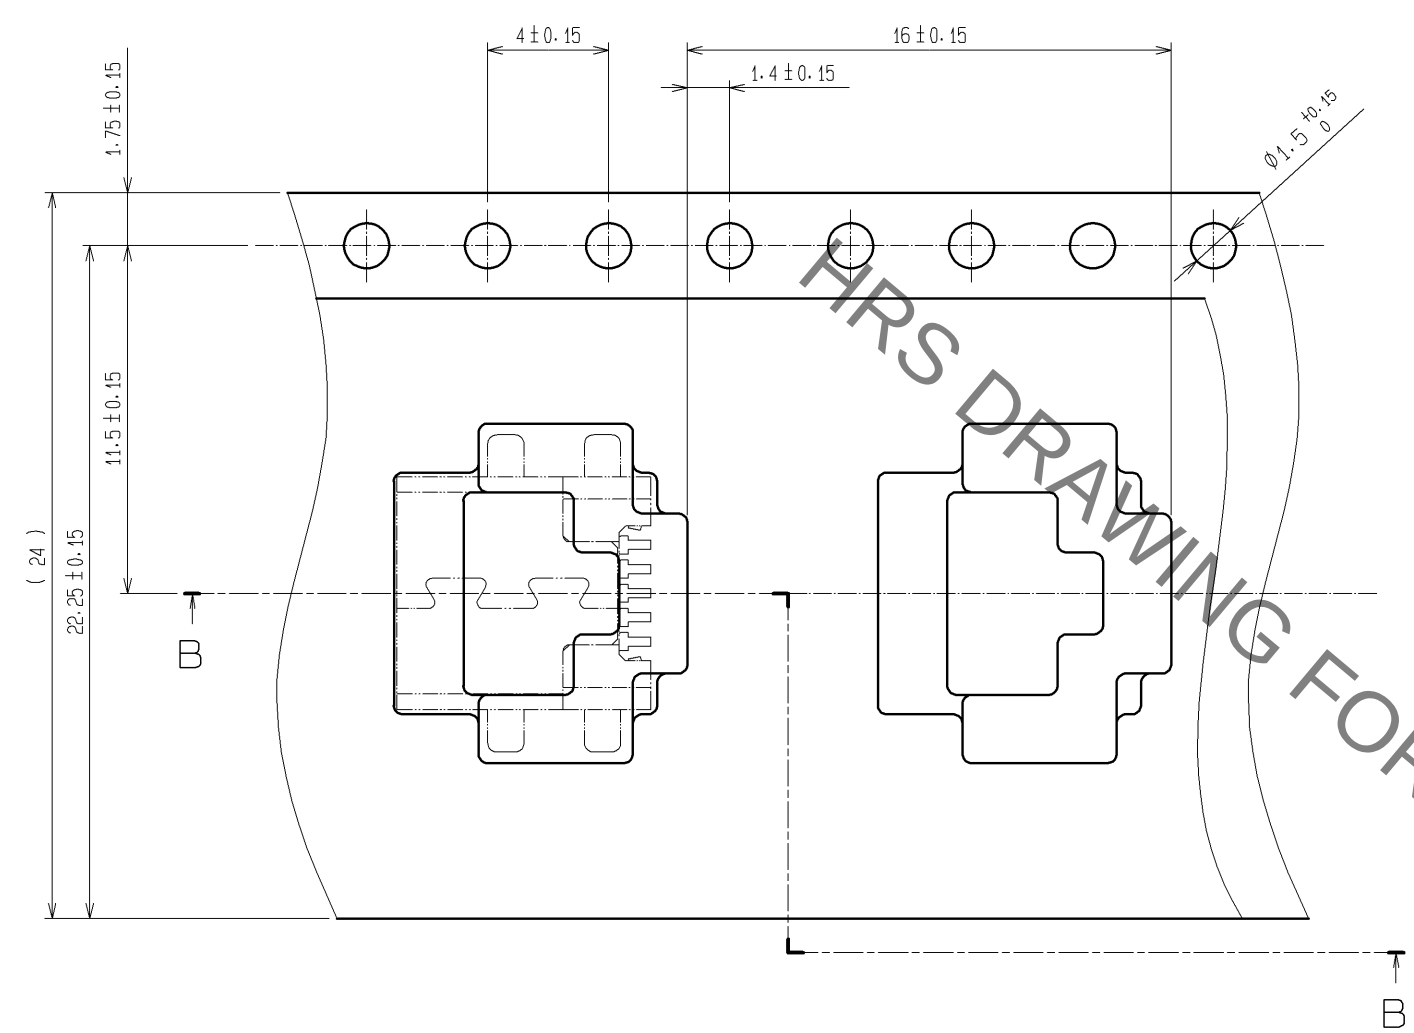

B-B

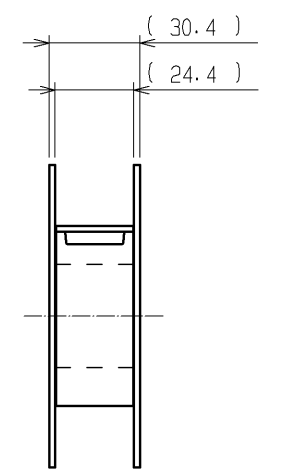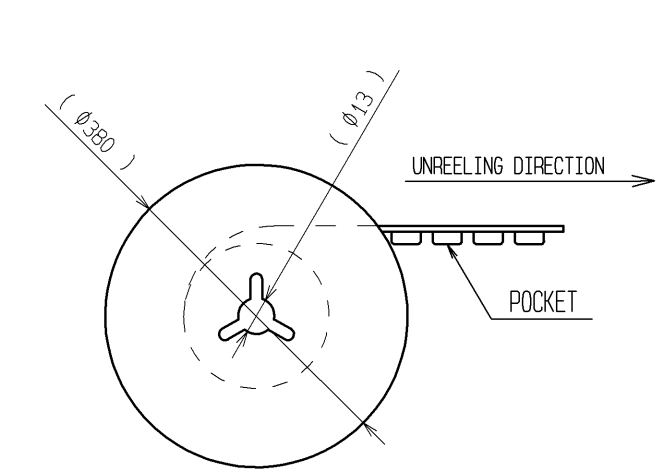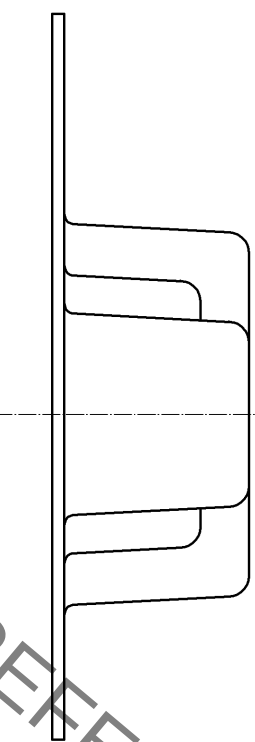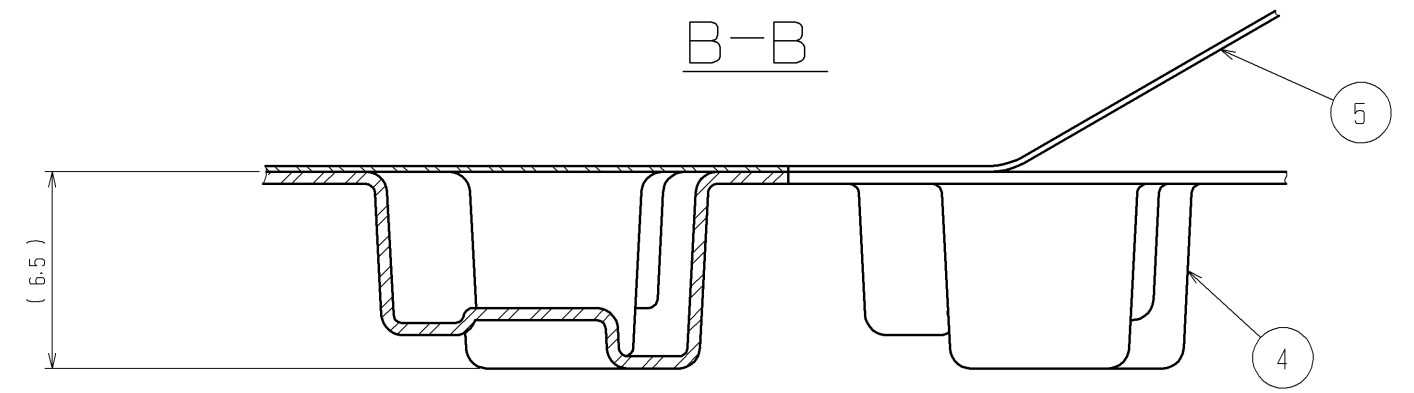

DRAWING NO.	EDC3-124218-00
PART NO.	UX60RA-MB-5ST
CODE NO.	CL240-0007-5-00