

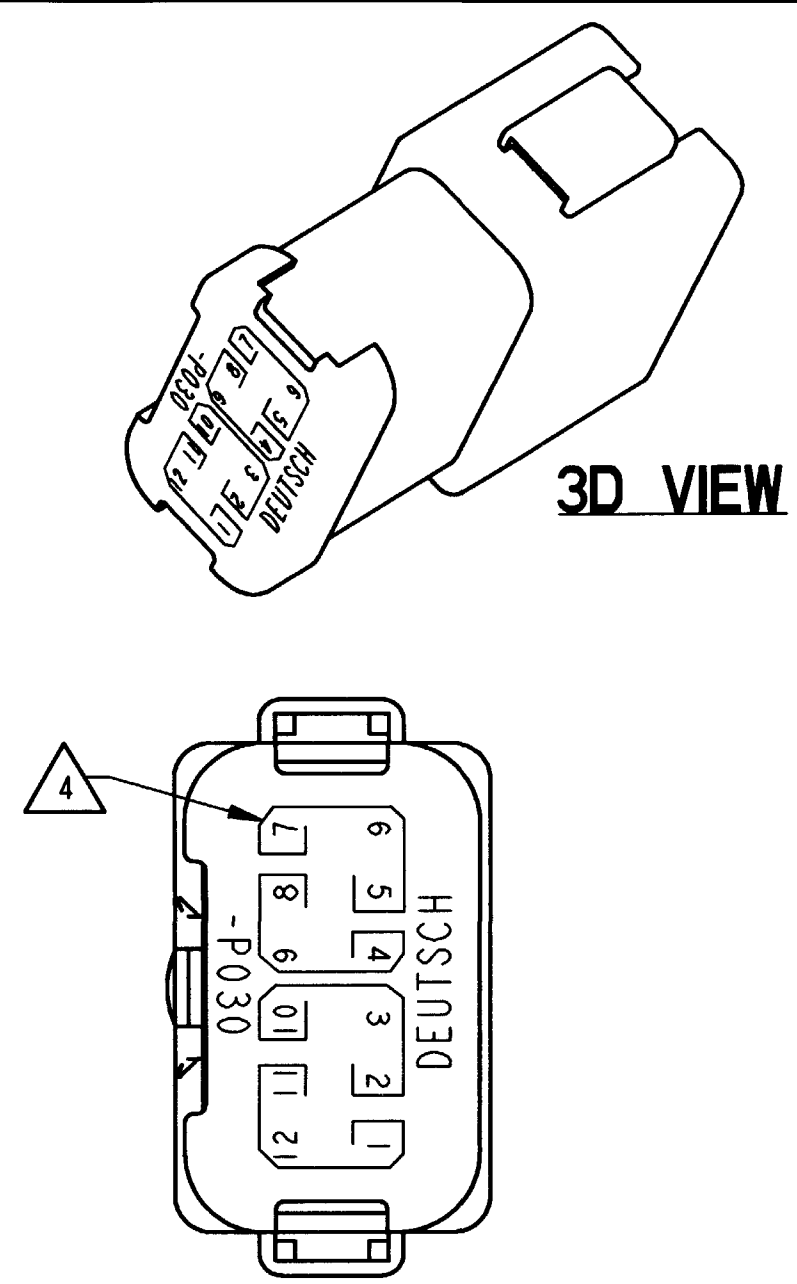


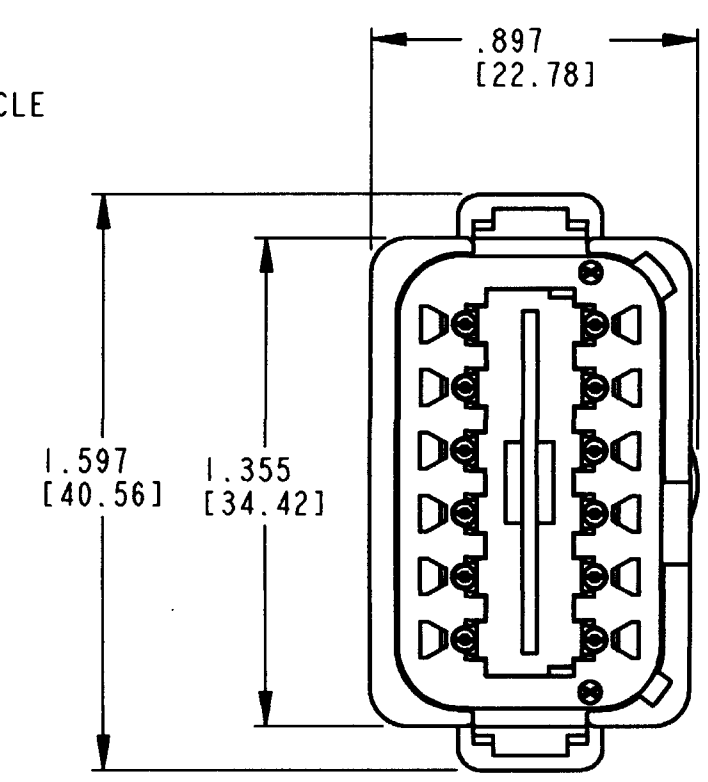

3D VIEW

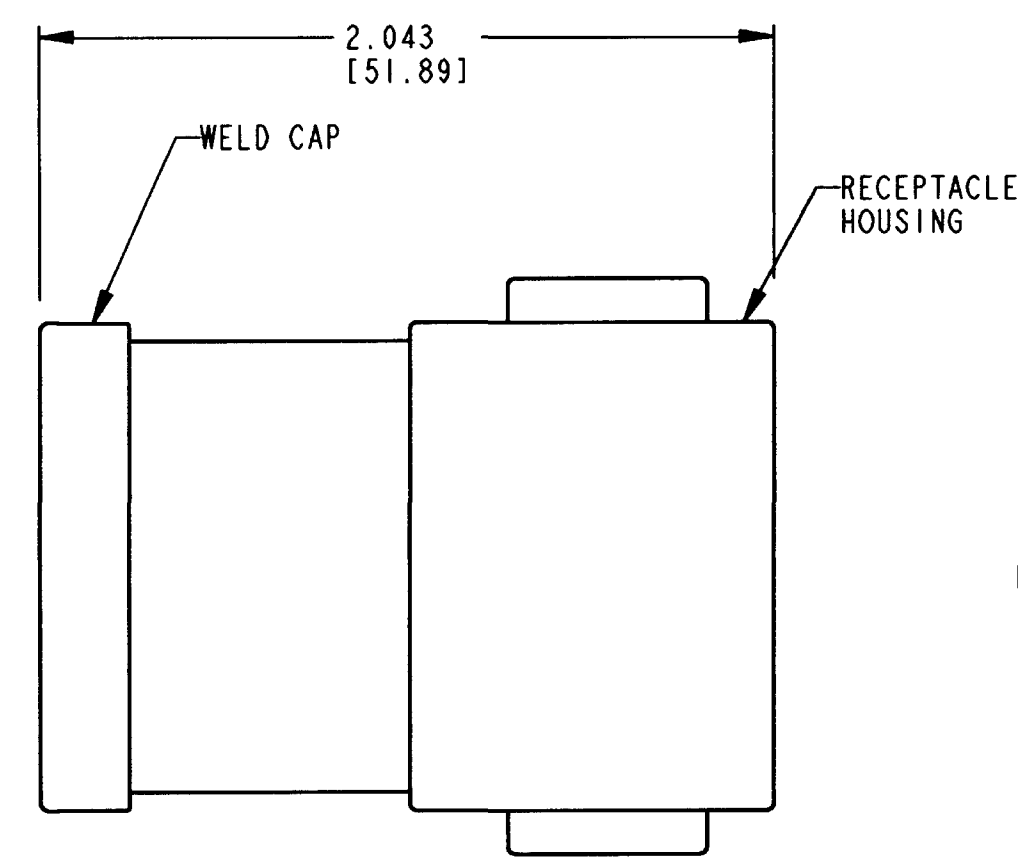

5. MAXIMUM CURRENT RATING FOR THE 3 PIN BUSBAR IS 13 AMPS.
4. BORDERS SIGNIFY THAT EACH GROUP OF PINS (PINS 1,11,12, PINS 2,3,10, PINS 4,8,9, AND PINS 5,6,7 ARE BUSSED TOGETHER WITH A 3 PIN BUSBAR.
3. THIS DT04-12PA-P030 MATES WITH DT06-12SA-**** (**** = ALL MODIFICATIONS). CONSULT FACTORY FOR MODIFICATIONS.
2. DIMENSIONS ARE $\pm .025$ [0.63] UNLESS OTHERWISE SPECIFIED.
1. DIMENSIONS ARE IN INCHES [MILLIMETERS].
- NOTES:

REV	DT04-12PA-P030	REVISIONS			
NC		SYM	DESCRIPTION	DATE	APPROVED
		NC	NEW RELEASE PER E.O. P16658	5-5-00	RNL

SIGNATURE & DATE		CP		MATERIAL CODE	
DR	P. BURKE 5/2/00	DT 12 WAY RECEPTACLE KEY ARRANGEMENT -A- (4) 3 PIN BUSBARS-NICKEL PLATED COLOR: GREY		The Deutsch Company DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545	
CHK	<i>[Signature]</i> 5-4-00				
PE	<i>[Signature]</i> 5-4-00				
APPD	<i>[Signature]</i> 5-5-00				
SCALE	NONE	WT		B DT04-12PA-P030 DWG SIZE CODE 11139 SHEET 1 OF 1	

ENVELOPE