

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20




© COPYRIGHT 20

BY -




ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	19JUN2015	DL	CW

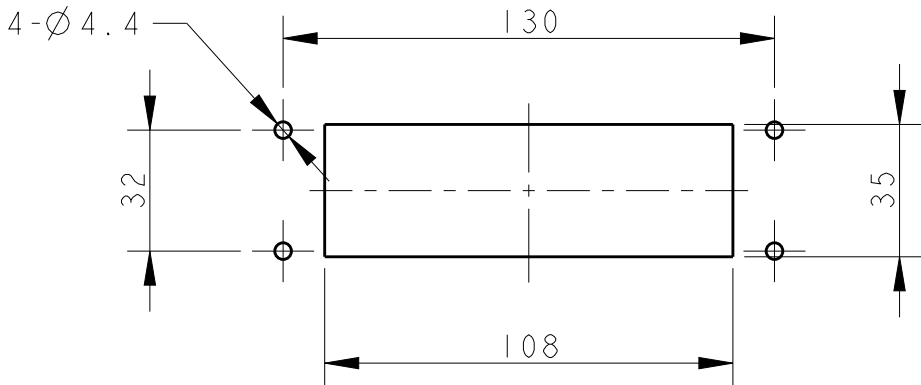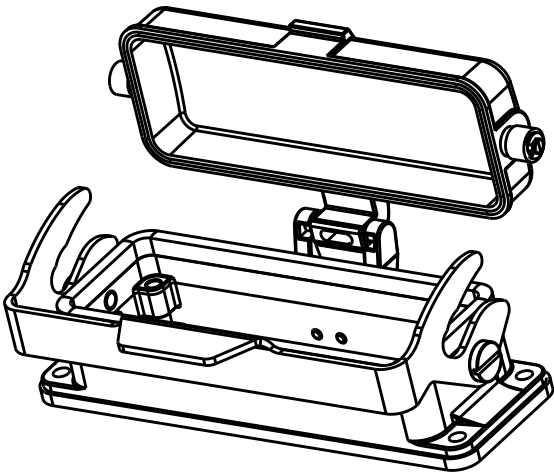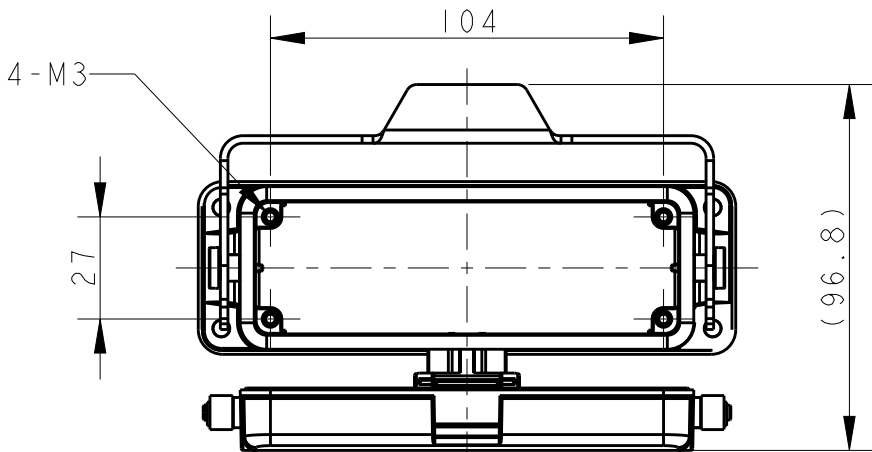


PANNEL CUT OUT

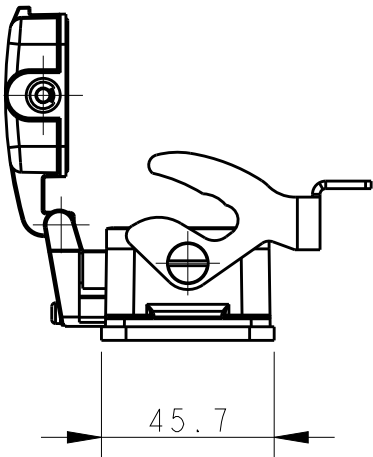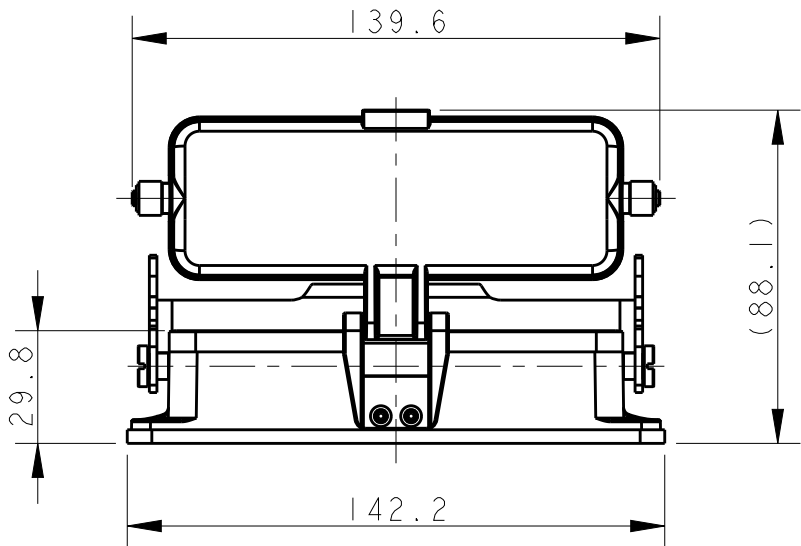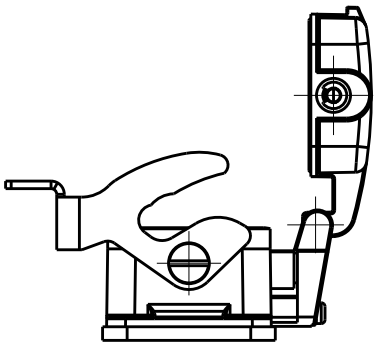

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

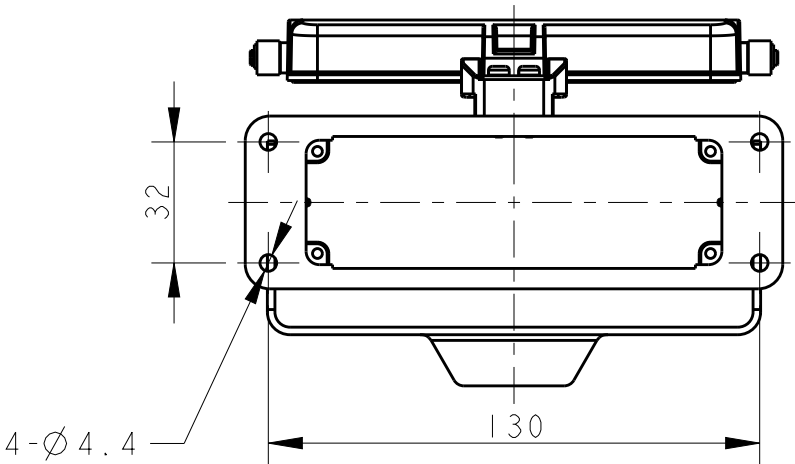

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±0.1 1 PLC ±0.1 2 PLC ±0.1 3 PLC ±0.1 4 PLC ±0.1 ANGLES ±0.1
MATERIAL	FINISH
TBD	-
-	-

DWN	DAVID LI	19JUN2015
CHK	CHRIS WANG	19JUN2015
APVD	XU XIANG	19JUN2015
PRODUCT SPEC	108-137013	
APPLICATION SPEC	114-137013	
WEIGHT	-	
CUSTOMER DRAWING		

T1510243100-000
ASSEMBLY PART
NUMBER

H24B-ADM-LB
ASSEMBLY PART
DESCRIPTION



TE Connectivity

NAME
H24B-ADM-LB

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	©-T1510243100000	-
SCALE	1:2	SHEET 1 OF 1	REV A