




REVISIONS ÄNDERUNGEN				
P	LTR	DESCRIPTION BESCHREIBUNG	DATE	APVD
	A1	NEW DRAWING	27JUN2014	YR CS

- 1 MATERIAL: ITEM NO. 1: HOUSING - PA  
 ITEM NO. 2: CONTACT BODY - PA  
 ITEM NO. 3: CONTACT - CuZn (brass)  
 CONTACT FINISH - Au (gold)

2 ALL DIMENSIONS ARE FOR NOMINAL REFERENCE ONLY UNLESS OTHERWISE STATED


3 MEASUREMENT REFERENCE ONLY

4 PACKAGING: 1 PIECE IN A BAG

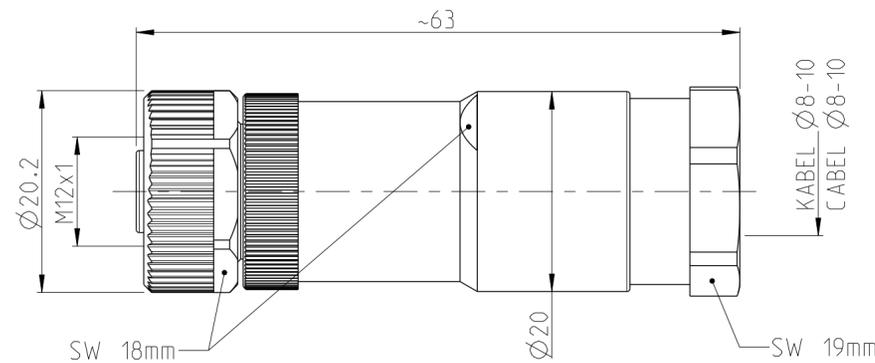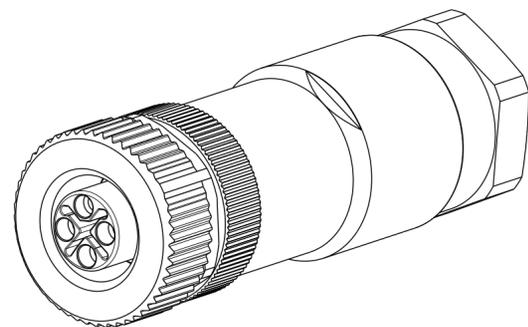

PIN ARRANGEMENT  
S-CODING (SCALE 4:1)

0-2120950-1

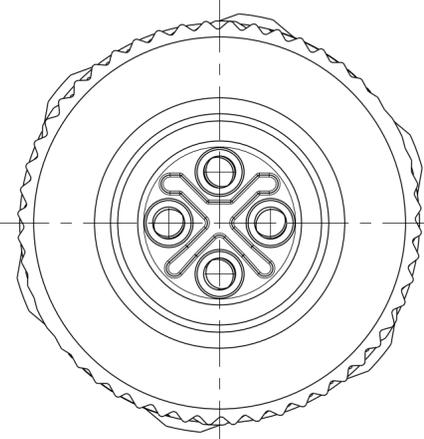

TECHNICAL DATA	0-2120950-1
RATED VOLTAGE	630V
RATED IMPULSE VOLTAGE	6000V
POLLUTION DEGREE	3
OVERVOLTAGE CATEGORY	III
MATERIAL GROUP	III
RATED CURRENT	12A
VOLUME RESISTIVITY	≤ 3mΩ
DEGREE OF PROTECTION	IP67
UPPER TEMPERATURE	+85 °C
LOWER TEMPERATURE	-40 °C

8-10	16 / 1.50	⚠	4	0-2120950-1
CABLE FEED-THROUGH mm	WIRES AWG / mm <sup>2</sup>	MATERIAL	NUMBER OF POLES	TE-PART-NO.

DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT. BEMASSUNGEN UND TOLERANZEN GEMAESS GPS (ISO STANDARDS).		DWN YASHKUMAR 27JUN2014
THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).		CHK M. STRELOW 27JUN2014
DIMENSIONS: MASSE IN HEINHEITEN: (MM)		APVD C. SCHREITTLINGER 27JUN2014
TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN		NAME
0 PLC ±	1 PLC ±	M12 RECEPTACLE CONNECTOR, STRAIGHT, FIELD INSTALLABLE, POWER, S-CODED
2 PLC ±	3 PLC ±	
4 PLC ±	ANGLES/WINKEL ±	SIZE
FINISH/OBERFLÄCHE/FARBE		A2
MATERIAL		CAGE CODE
		00779
		DRAWING NO. ZEICHNUNGS-NR.
		C-2120950
		RESTRICTED TO NUR FÜR
		-
		Customer Drawing
		/KUNDENZEICHNUNG
		SCALE MASSSTAB
		2:1
		SHEET BLATT
		1 OF 1
		REV
		A1

SIZE ISO 14405 (E)