

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20






COPYRIGHT 20

BY -




ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	03JUL2015	DL	CW

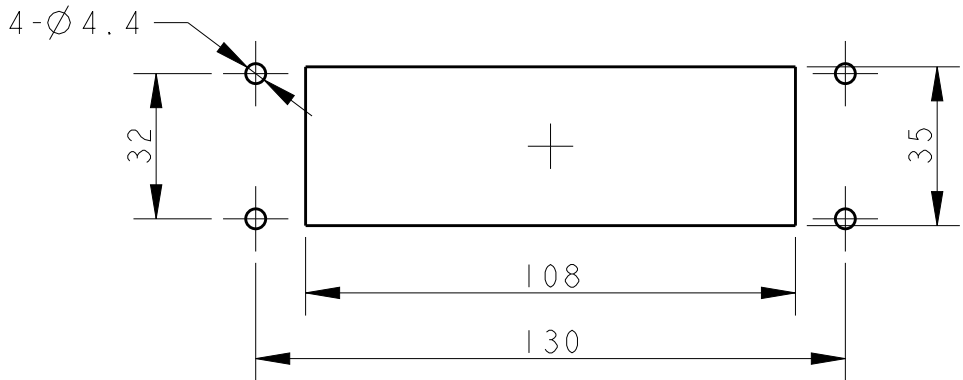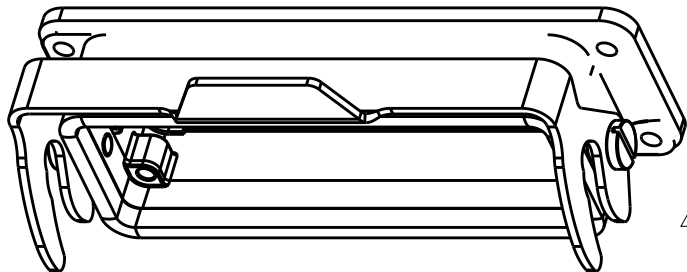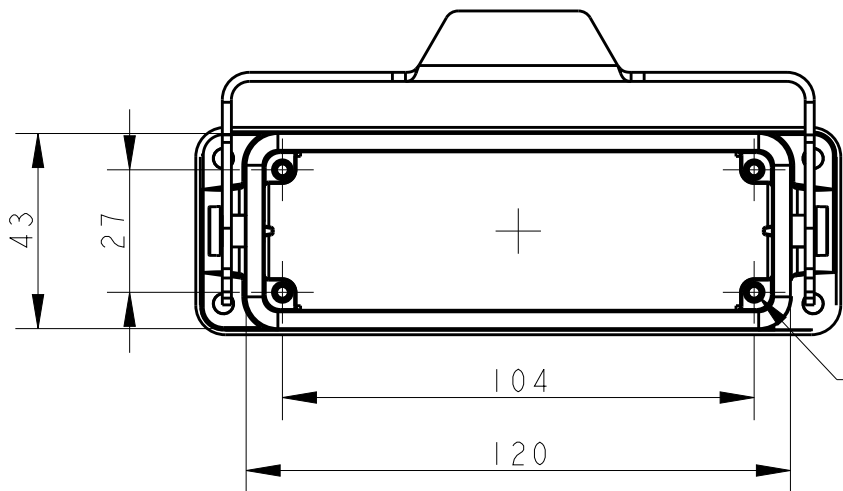

PANNEL CUT OUT

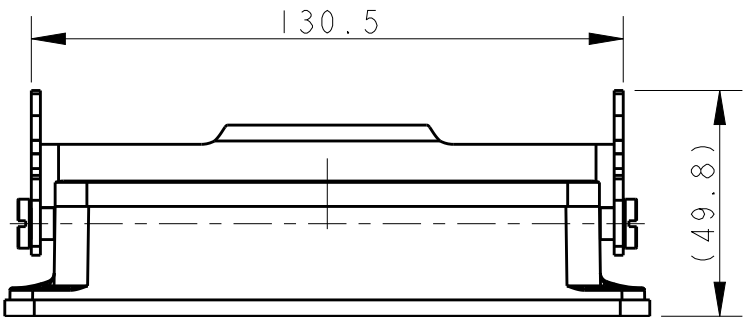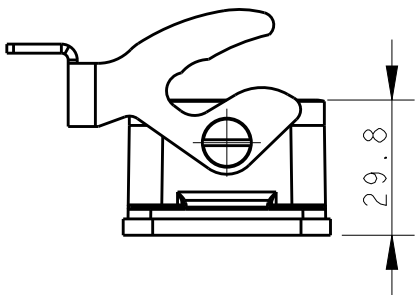


NOTES:

1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:


1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

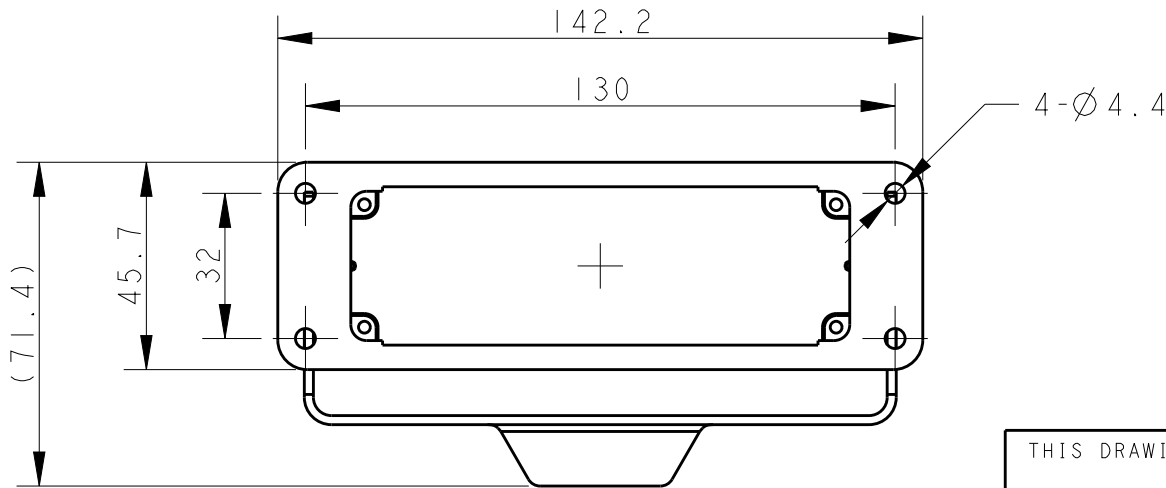

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±0
1 PLC	±0.1
2 PLC	±0.2
3 PLC	±0.3
4 PLC	±0.4
ANGLES	±0.5

MATERIAL

TBD

FINISH

-

DWN 03JUL2015

DAVID LI

CHK 03JUL2015

CHRIS WANG

APVD 03JUL2015

XU XIANG

PRODUCT SPEC

108-137013

APPLICATION SPEC

114-137013

WEIGHT

-

CUSTOMER DRAWING

T1500243000-000

ASSEMBLY PART
NUMBER

H24B-AG-LB

ASSEMBLY PART
DESCRIPTION



TE Connectivity

NAME

H24B-AG-LB

SIZE

A3

CAGE CODE

-

DRAWING NO

©-T1500243000000

RESTRICTED TO

-

SCALE

3:5

SHEET

OF

REV

A