

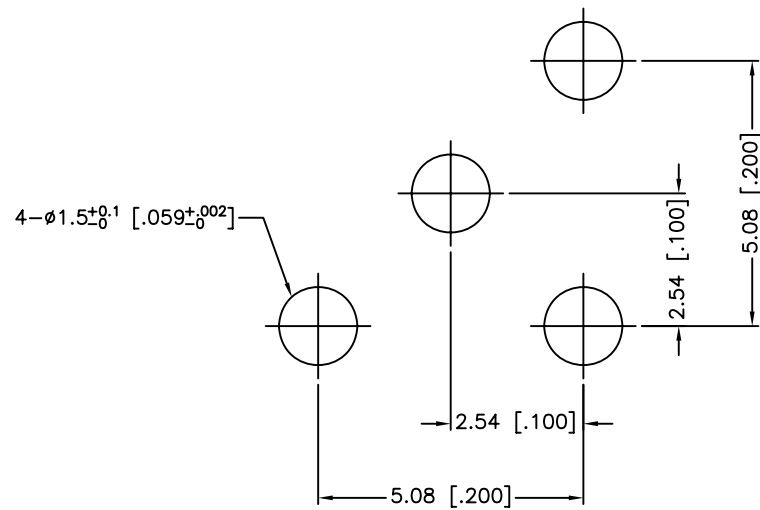


REV.	DATE	ECR NO.	DESCRIPTION
NC	11/11/10	XXXXXX	INITIAL RELEASE

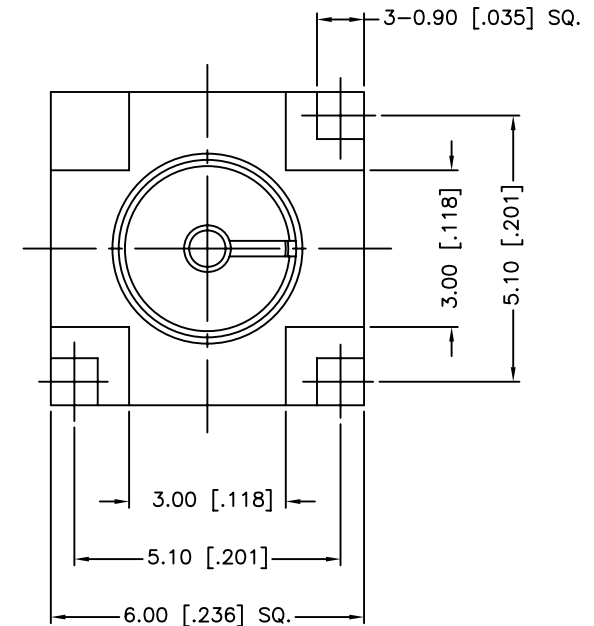

RECOMMENDED
MOUNTING HOLE

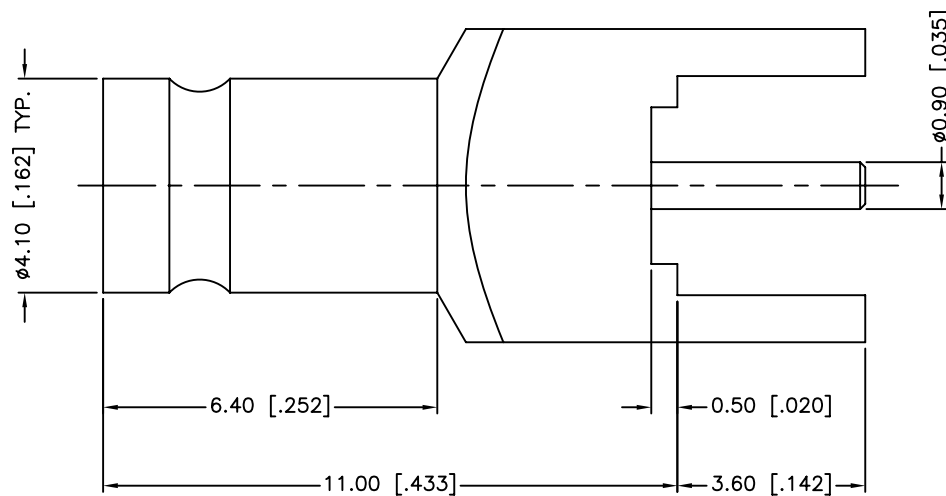

VSWR (RETURN LOSS): 1.15 MAX. @ 0-3 GHz

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING					APPROVALS		DATE		Amphenol Connex											
					DRAWN	M.ZHANG		11/11/10												
					CHECKED					PART DESCRIPTION 1.0/2.3 JACK PCB MOUNT WITH 3–LEGS (FOR 75 OHM)										
					ISSUED															
					SHEET	1 OF 1														
									PART NO. 282127–75–10											
3					CONTACT PIN		BER. COPPER		GOLD		1		DWG. NO. 282127–75–10.DWG		REV. NC		SIZE A		SCALE NA	
2					INSULATOR		PTFE		NATURAL		1									
1					BODY		BRASS		GOLD		1									
DESCRIPTION					MATERIAL		FINISH		QTY											